


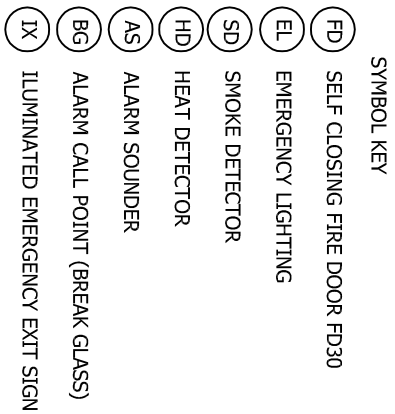

- 1) ALL INTERNAL DOORS (EXCLUDING TOILETS) TO BE FIRE DOORS FD30 SELF CLOSING.
- 2) STAIR WELL TO HAVE A MIN OF 60MIN FIRE PROTECTION.
- 3) ALL COMPARTMENT WALLS TO HAVE A MIN OF 30MIN FIRE PROTECTION.
- 4) ALL CEILINGS TO HAVE A MIN OF 30MIN FIRE PROTECTION.
- 5) FIRE ALARM/SMOKE DETECTION SYSTEM TO BE INTERLINKED WITH MAINS POWER WITH BATTERY BACK UP IS TO COMPLY WITH BS5839 Pt 1. COMMISSIONING CERTIFICATE TO BE SUPPLIED.
- 6) EMERGENCY LIGHTING IS TO COMPLY WITH BS5266 Pt1. COMMISSIONING CERTIFICATE IS TO BE SUPPLIED.
- 7) ALL DOORS ON ESCAPE ROUTES TO BE READILY OPERABLE WITHOUT THE USE OF A KEY.
- 8) FIRE PROTECTION BETWEEN FLOORS APPEARS TO BE ADEQUATE BUT SOME TILES IN THE SUSPENDED CEILING WILL NEED TO BE REPLACED DUE TO DAMAGE.