Area of wall that needs re-pointing and stone replacement. Remove ivy and vegetation. Using hand tools remove defective mortar. Remove any defective stones. Match any replacement stone and take lime mortar sample
for matching new lime mortar to.
All as per specification.

Area of severely eroded stonework. Carefully cut out defective stone with hand tools . Match in replacement stone and take lime mortar sample for matching.

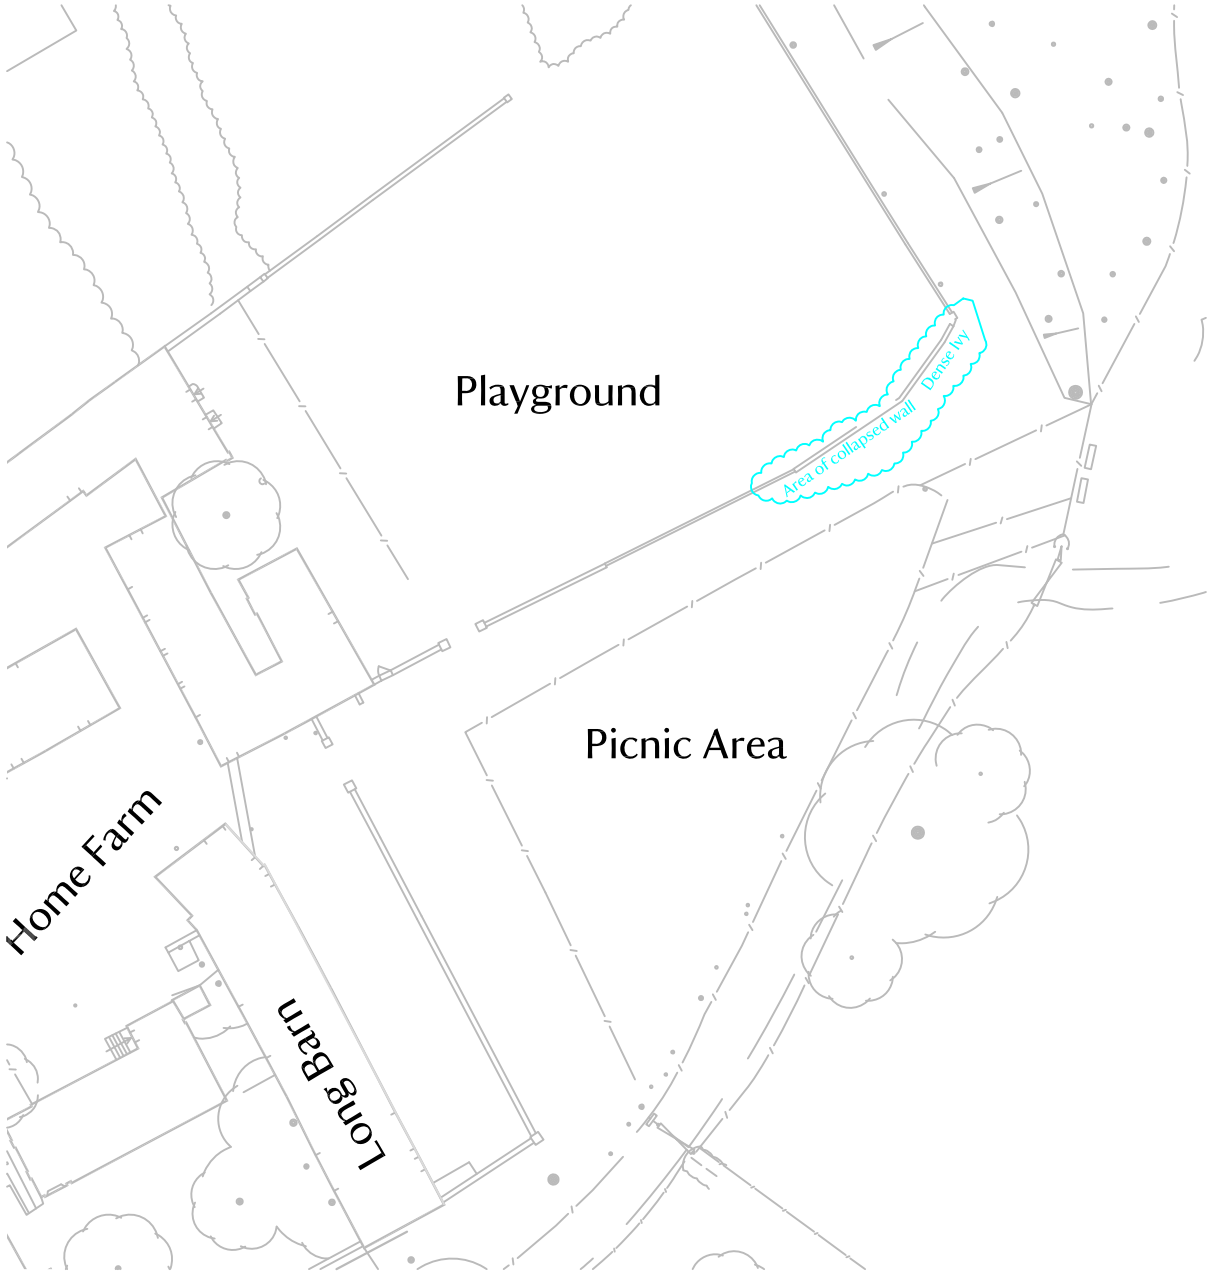

Area of collapsed stone wall proposed to rebuild. Remove ivy and recover stone to be reused. Match any replacement stone and take lime mortar sample for matching.

DO NOT SCALE

This drawing must not be scaled.

The Principal Contractor is to verify all dimensions, levels and datums prior to commencement of work.

Any discrepancies are to be reported immediately to the Building Surveyor.

Variations and modifications to the work shown on these drawings are not to be carried out without the written permission of the Project Manager.

This drawing is the property of the National Trust. The Information shown is to be treated as confidential and must not be copied, reproduced or disclosed to any third person without the the National Trust's written permission.

Maps are reproduced by permission of Ordnance Survey
© Crown Copyright and database right 2017

REVISION	BY	DATE	DETAILS

NOTES

NATIONAL TRUST
NORTH REGION
Altrincham Hub
Stamford Estate Office
18 High Street
Altrincham
Cheshire WA14 1PH
Telephone (0161) 928 0075 Fax (0161) 929 6819

ESTATE/PROPERTY
Wentworth Castle Gardens

DRAWING TITLE
Estate Wall Repairs

DRAWN BY SD	DATE Dec 2018
SCALE @ A3 NTS	PROPERTY REFERENCE
DRAWING No	REV