


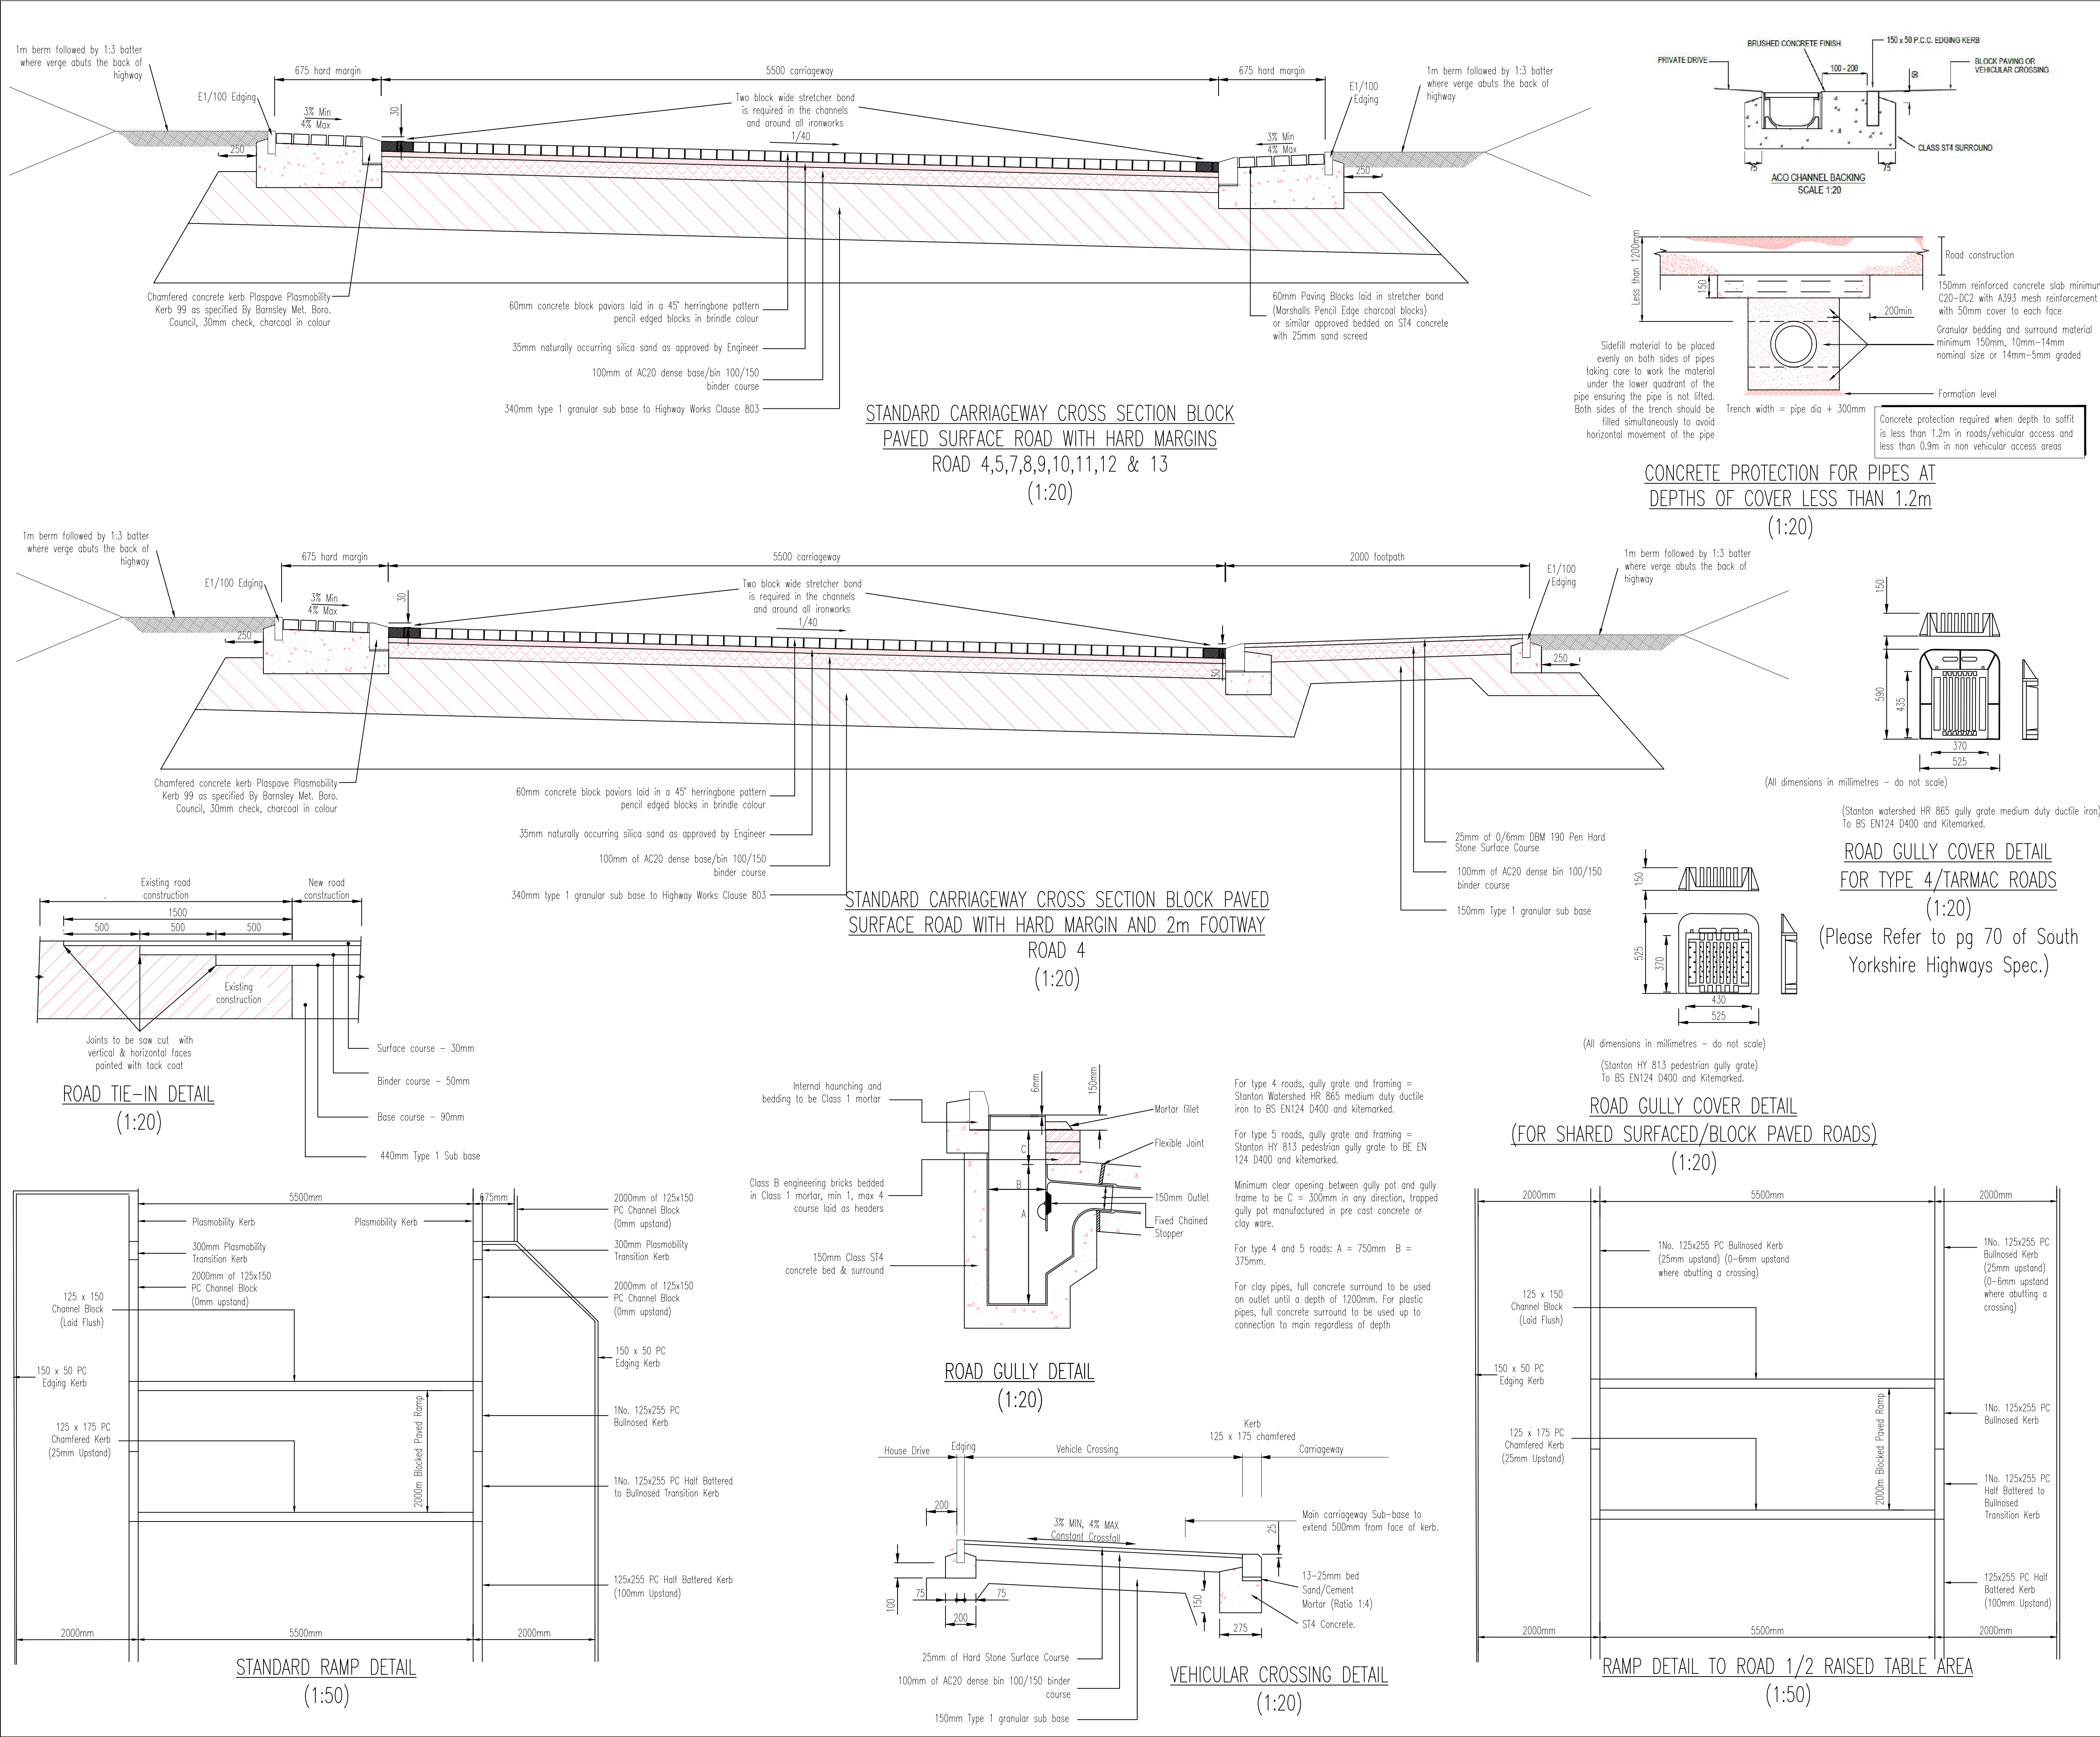

N O T E S																																			
1. All highway works shall be constructed in accordance with the Barnsley Metropolitan Borough Council Specifications and recommendations. 2. For guidance, all clause numbers below relate to the Department of Transport's Specification for Highway Works 1991. 3. Preparation and surface treatment of formation shall be in accordance with CL 616. 4. General requirements for road pavements shall be in accordance with clauses 701 to 707 inclusive. 5. All bitumen macadam shall be in accordance with BS 4987. 6. All bituminous bound materials shall be transported, laid and compacted in accordance with CL 901. 7. Granular Type 1 sub base shall be in accordance with CL 803. 8. Laying and compaction of sub base shall be in accordance with CL 802. 9. Road base shall be dense bitumen macadam in accordance with CL 903. 10. Base course shall be dense bitumen macadam in accordance with CL 906. 11. Wearing course shall be dense bitumen macadam in accordance with CL 912, or stone mastic asphalt in accordance with CL 942, as shown on this drawing. Limestone aggregate is not permitted. 12. Block paver colours shall be either in accordance with the Highway Authority's requirements. 13. Block pavers shall be laid in 45° herringbone pattern in the carriageway (with two stringer courses in the channel and 90 degree in all ramps with a two block border), with two stringer courses around iron works. 14. Carriageway block pavers shall be bedded on 35mm compacted thickness of naturally occurring silica sand, and shall have fine, kiln dried sand brushed and vibrated into the joints, unless shown otherwise on this drawing. 15. Block pavers shall be laid in accordance with BS6717 Part 3. 16. Gully grates and frames shall comply with the relevant provisions of BS EN124 and be of a non-rocking design with captive hinge access and be kitemarked. Load Class D400 for roads regularly carrying fast moving heavy vehicles. Class D400 to be used in lesser trafficked areas eg. estate roads, cul-de-sacs, residential car parking areas etc. 17. Any buried walls identified on site shall be taken down to a level 600mm below formation. Solid cellar floors shall be broken up. Unsuitable or uncompacted material shall be removed and replaced with suitable material 6f2, laid and compacted in layers. 18. Pavement construction is based upon an assumed minimum CBR value of 2% and will need to be confirmed by contractor prior to works commencing. 19. CBRs tests are performed on formation using 600mm diameter plate at 20m intervals off the line of any drainage trenches. CBR test results are to be provided to Barnsley MBC Highways engineer together with a location plan identifying the position of the tests. 20. Vehicle parking bays to be separated from main carriageway with double stretcher bond of charcoal paviours																																			
ALL PROSPECTIVELY ADAPTABLE HIGHWAY DRAINAGE MUST BE CARRIED OUT IN FULL ACCORDANCE WITH THE LATEST REQUIREMENTS OF SERIES 500 OF THE SPECIFICATION FOR HIGHWAY WORKS																																			
<table><tr><td>C</td><td>JC</td><td>08.09.23</td><td>Amended to BMBC comments</td><td>RJ</td><td>MI</td></tr><tr><td>B</td><td>AM</td><td>14.06.23</td><td>Amended to MBDC comments</td><td>RJ</td><td>MI</td></tr><tr><td>A</td><td>DJG</td><td>28.06.22</td><td>Revised to suit client comments</td><td></td><td></td></tr><tr><td>/</td><td>DJG</td><td>27.05.22</td><td>Issued For Approval</td><td>MI</td><td>MI</td></tr><tr><td>Rev</td><td>By</td><td>Date</td><td>Revision</td><td>Chk</td><td>Apvd.</td></tr></table> ARP ARP ASSOCIATES Chartered Consulting Engineers Northwest House • 5 & 6 Northwest Business Park • Servia Hill, Leeds. • L56 2QH 0113 245 8498 0113 244 3864 leeds@arpassociates.co.uk www.arpassociates.co.uk ARP Associates is a trading division of ARP Geotechnical Ltd, a company registered in England and Wales with company number 3773831, whose registered office is at 5/6 Northwest Business Park, Servia Hill, Leeds LS6 2QH						C	JC	08.09.23	Amended to BMBC comments	RJ	MI	B	AM	14.06.23	Amended to MBDC comments	RJ	MI	A	DJG	28.06.22	Revised to suit client comments			/	DJG	27.05.22	Issued For Approval	MI	MI	Rev	By	Date	Revision	Chk	Apvd.
C	JC	08.09.23	Amended to BMBC comments	RJ	MI																														
B	AM	14.06.23	Amended to MBDC comments	RJ	MI																														
A	DJG	28.06.22	Revised to suit client comments																																
/	DJG	27.05.22	Issued For Approval	MI	MI																														
Rev	By	Date	Revision	Chk	Apvd.																														
TITLE TYPICAL ROAD DETAILS SHEET 2 OF 3																																			
PROJECT GYPSY LANE, WOMBWELL																																			
CLIENT MILLER HOMES (YORKSHIRE) LTD																																			
DRAWING STATUS PRELIMINARY																																			
Scale AS SHOWN	Date MAY 22	Drawn DJG	Chk. MI																																
Drg. No. 0425/87/04.02			Rev C																																