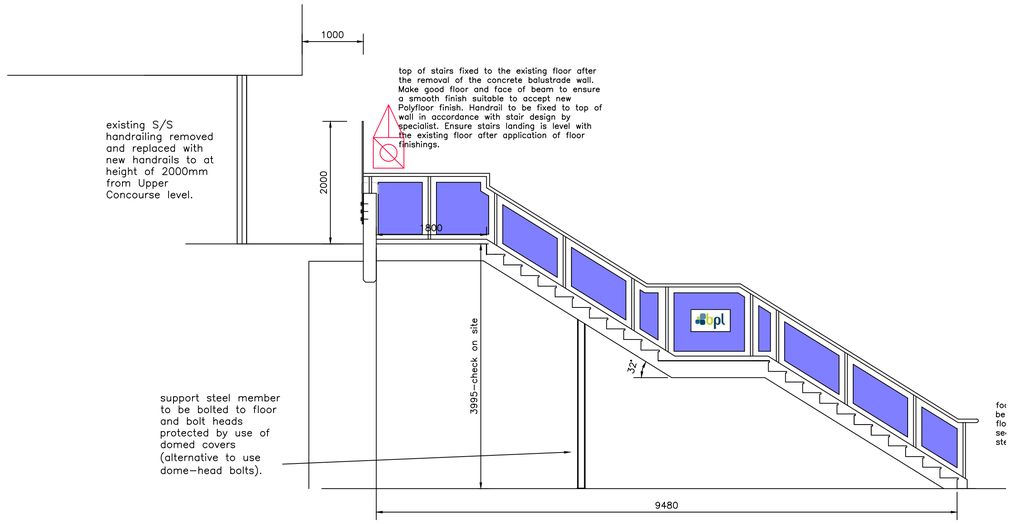

PROPOSED STAIRS ELEVATION

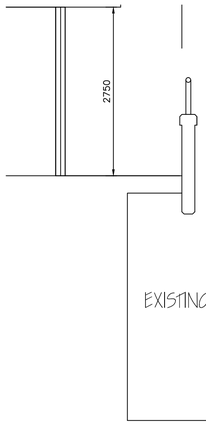

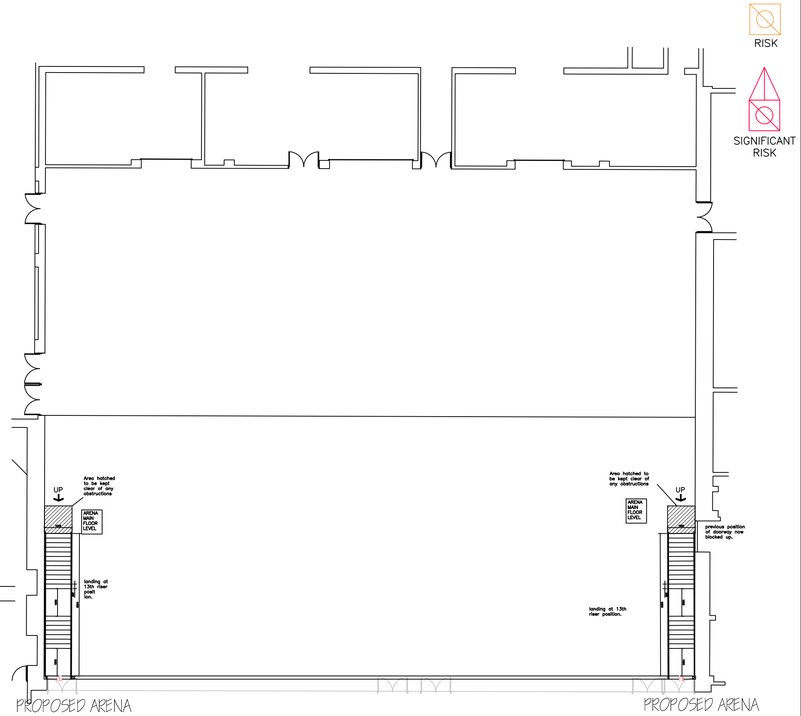

PROPOSED ARENA STAIR LAYOUT NORTH SIDE

PROPOSED ARENA STAIR LAYOUT SOUTH SIDE

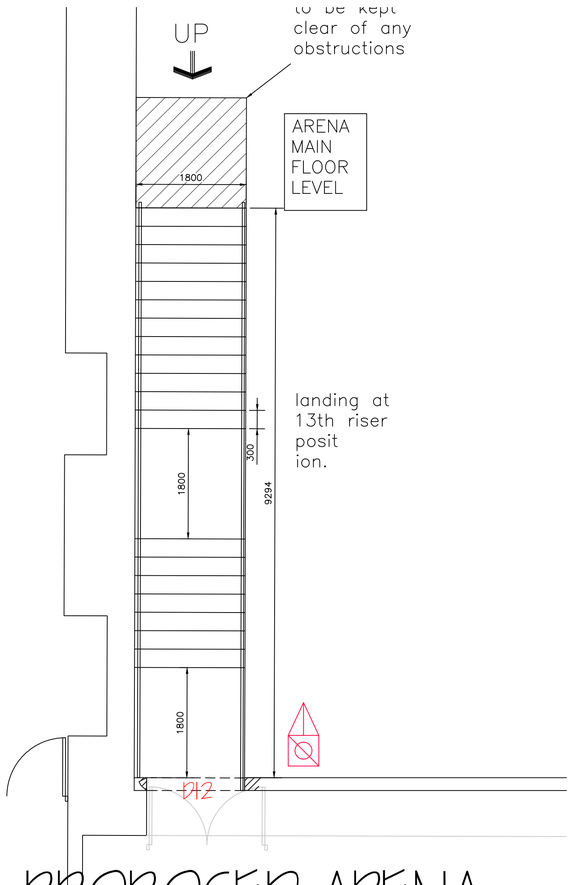

NEW ACCESS STAIRS
Access stairs 1800mm wide constructed of steel structure with steel tray treads infilled with min 65mm screed with smooth trowelled finish to accept new covering to clients specification. Upstand to side of 350mm wide string as fixing for S/S 50dia tubular handrails with 15mm toughened glass panels as shown. Fixed using proprietary fixings all in stainless steel. Fenestration (may include logo as shown) to all glass panels. Going 300mm rise 174mm-to be confirmed at survey for manufacture- Landing at bottom of stairs kept clear and hatched as shown. Existing RC wall cut through to allow access to stairs from upper concourse level with ends made good and reinforcement cover maintained. (Subject to recommendations of Structural Engineers and suitable method statement). Leave suitable for decoration. Two handrails to side of stairs-1100mm high where baluster, 900mm high where raking handrail.

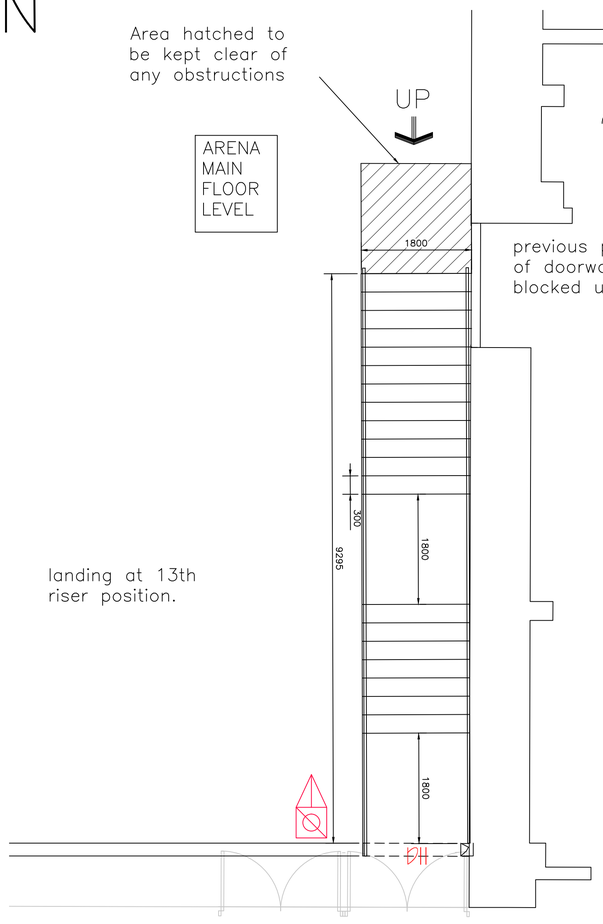

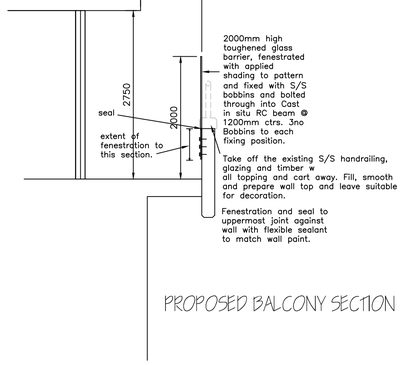

PROPOSED BALCONY SECTION

PROPOSED ARENA STAIR LAYOUT NORTH SIDE

PROPOSED ARENA STAIR LAYOUT SOUTH SIDE

Actual depth of foundations to be determined on site.
All work to be to the satisfaction of the local authority.
All dimensions to be checked on site and any discrepancies must be notified immediately
All dimensions are in millimetres unless otherwise stated.
Information given on this drawing is subject to local authority approval.
Do not scale this drawing.

VINE PROJECTS & DESIGN

3 WILLOW BANK, BARNSLEY SOUTH YORKSHIRE S75 1BN

M:- 07973 265850 E-mail: vineprojects@aol.com

CLIENT: BPL Barnsley

AREA A & B

PROJECT: Metrodome Improvements
New Arena Stairs Access Details

COPYRIGHT © VINE PROJECTS & DESIGN 2015

FILE NAME	DWG.No	SCALE	DATE	DRAWN	REV.
bpl_major_improvements 2016.dwg	5582/06	1:100 1:50	10/2015	jjb	