

Do not scale off this drawing. All discrepancies to be reported to Portakabin Limited

© Portakabin Limited 2007
This drawing is the property of Portakabin Limited. It must not be copied or reproduced or divulged to anyone without written permission.
No. Date By

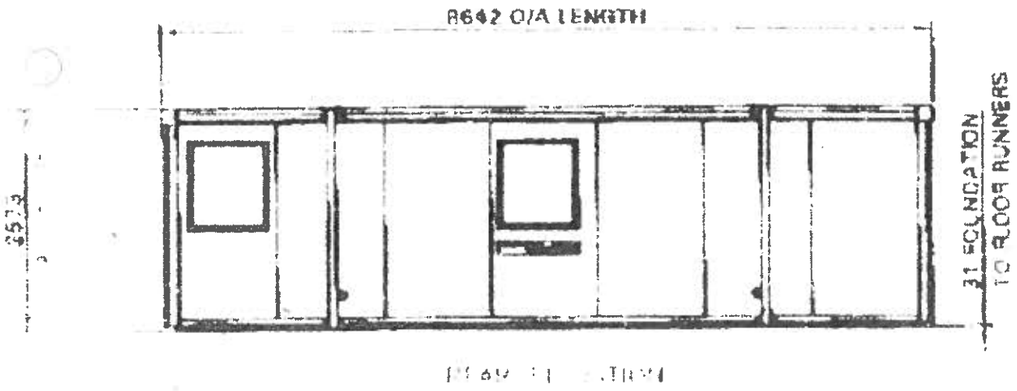


SIDE ELEVATION

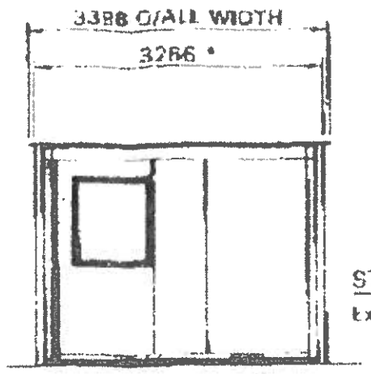


END ELEVATION

* NOTE O/ALL WIDTH FOR CONTINENTAL EUROPEAN BUILDINGS

DOOR & WINDOW POSITIONS MAY BE DIFFERENT TO THOSE SHOWN ON SPECIFIC CONTRACT DRAWINGS

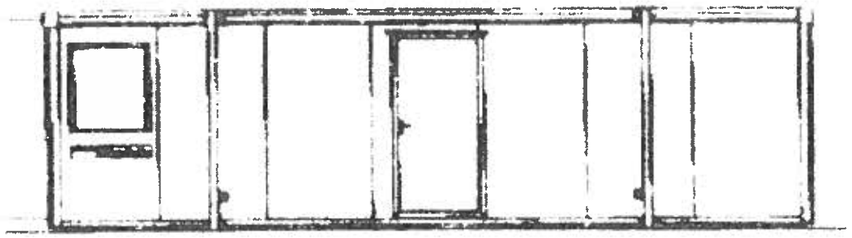



SIDE ELEVATION

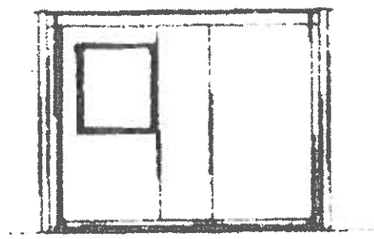

END ELEVATION

PLAN

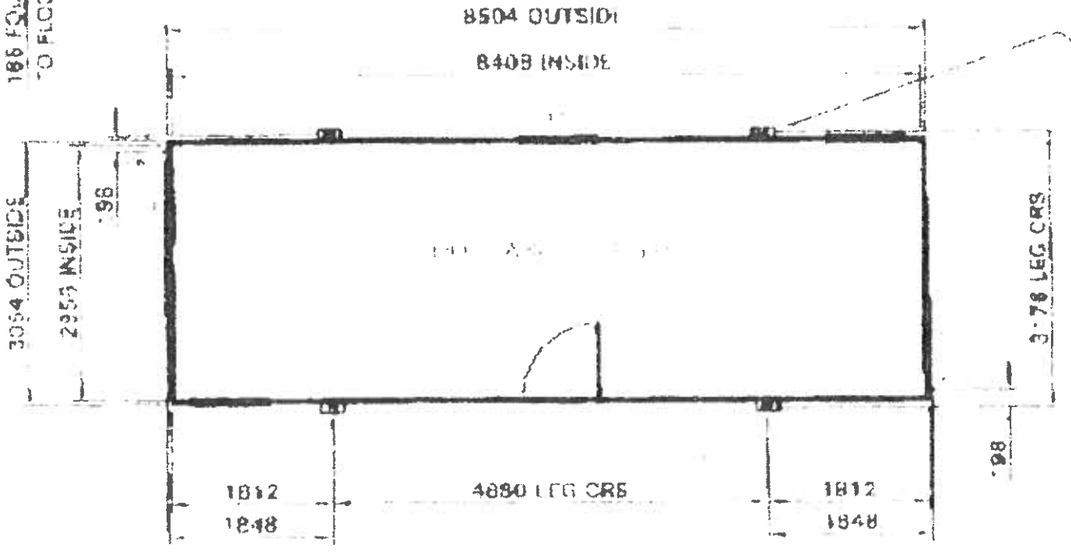

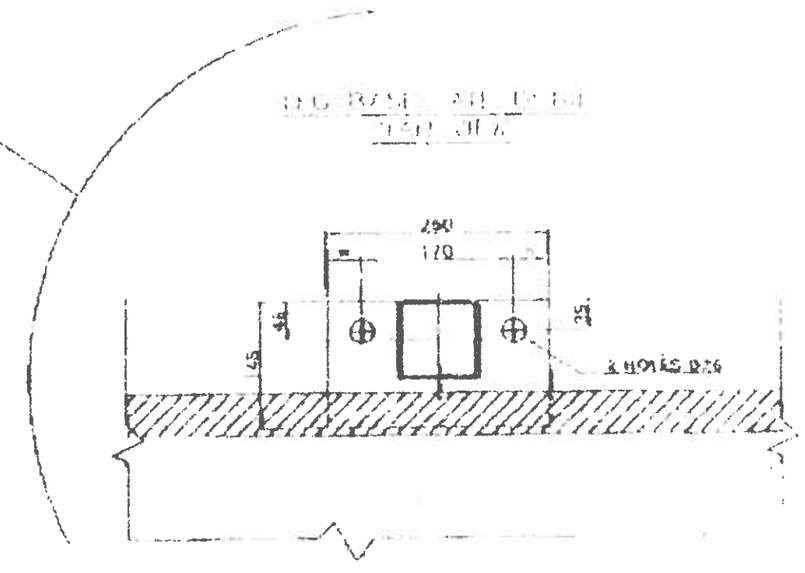

STANDARD COLOURS

External :	Wall Cladding, Fascia, Corner & Bottom Wall Trims, Outer Cage	- Sales & Scottish Divisions - Alabaster nearest BS ref. 18 B 17 Hire & European Divisions - Goosewing Grey nearest BS ref. 10 A 05
	Door leaf	- Sales & Scottish Divisions - Britannia Blue nearest BS ref. 18 E 58 - Hire - Merlin Grey nearest BS ref. 18 B 25 Portaloo & Events - Poppy Red nearest BS ref. 04 E 53 European Division - Goosewing Grey nearest BS ref. 10 A 05
	Door Frame	- Silver Anodised Aluminium
	Door Furniture	- Manhattan Grey NCS S 7502-Y RAL DS 080 70 05.
	Windows	Sales & Scottish Divisions - Britannia Blue nearest BS ref. 18 E 58 Hire - Grey nearest RAL 7042 - Portaloo & Events - Blue Grey nearest BS ref. 18 B 29 European Divisions - Blue nearest RAL 5011
	Roof	- White - nearest BS ref. 00 E 55
	Inner Legs	- Hot dipped galvanised

KEY

O OPEN WINDOW

F FIXED WINDOW

RWP RAIN WATER PIPE

FOUNDATIONS

Simple foundations of level hardstandings are required to be capable of taking the foundation design load at each foot position of 20kN, which includes the dead weight of the building, imposed floor load of 3kN/m², imposed roof load of 0.75kN/m², and a basic wind speed to meet the requirements of BS8339: Part 2.

The foundations are to designed in accordance with BS8004 with level tops of a tolerance of ± 3mm.

The area of ground under the building, plus a surrounding 500mm must be no higher than 50mm below the tops of the building foundations.

All buildings are to be anchored to the foundations via the baseplate using M20 anchor bolts, unless it can be established that no climatic or other forces are likely to be applied so as to exceed the intrinsic stability of the building in its unloaded state.

All Lodastrut legs should be fully retracted onto the safety stops with the leg pins fitted through the outer legs and secured by the R' ring cotter.

It is recommended that professional advice is obtained for the design of the foundations.

Portakabin

Portakabin Limited Huntington York YO32 9PT
Telephone 01904 611666 Fax 01904 611644

Project: PORTAKABIN SOLUS

Client:

Title:

SPECIFICATION DRAWING
S1.082
LODASTRUT LEG OPTION

Date	Drawn
1.10.07	R SCHOFIELD

Scale: 1:5 & 1:50

Dwg No.	Rev.
002894	C