

N O T E S

ATTENTION IS DRAWN TO THE REQUIREMENTS OF THE CONSTRUCTION DESIGN AND MANAGEMENT REGULATIONS 2015 AND THE DUTIES AND RESPONSIBILITIES CONTAINED THEREIN

- For longitudinal sections refer to drawing 0425/87/06.
- No services are to be sited directly over, or within 1m of, an adoptable sewer or manhole.
- Private drainage connections to adoptable sewers to be via 45° junction.
- Off site manholes already built must have invert levels checked prior to connection to the off site drainage.
- Any connections to existing sewers/manholes are to be supervised by Yorkshire Water.
- All connections to proposed public sewers to be minimum 150mmØ.
- Any land drain or water course on site to be diverted as not to pass under proposed buildings. Diversion to be approved and inspected on site by the Local Authority.

INWL General Notes

- All adoptable sewer works and material to be in accordance with INWL requirements.
- Manhole covers shall/must have a clear opening of 600mm and shall be Class D400 to BS EN 124 with 150mm deep frames in highways.
- Filled ground must be filled and consolidated under the supervision, and to the satisfaction, of INWL before any sewer works are carried out.
- Cover slabs must carry the BS1 Kitemark or will be rejected by the INWL inspector. Where the clear opening of the Kitemarked product is different to that of the cover and frame, a loading bearing slab should be fitted above the cover slab to bring the size down to 600x600mm for the INWL specified cover size. Please refer to the Concrete Pipe Systems Association (CPSA), "Technical Bulletin" issued autumn 2004 for kitemarked cover slab opening sizes.
- The adoptable sewers should be a minimum of 1m and manholes 0.5m from kerb faces and service margins.
- Sewers must have 5 metres clearance from trees and hedges, (please also refer to Figure 2.3 on page 33 in "Sewers for Adoption" 6th Edition for restrictions on tree planting adjacent to Sewers).
- Sewers to be laid in Class "S" bedding (150mm granular bed and surround). Where depth of cover to top of the sewer is less than 1.2m in highways and verges (or less than 900mm in non vehicular access areas) then a concrete slab should be provided above the granular bed and surround.
- Adoptable plastic sewer pipes to be BS1 Kitemarked (Certified to WS 4-35-01 and BS/EN13476). Adoptable sewer pipes to be laid in maximum 3 metre lengths unless there is a specific operational need to lay longer.
- Plastic channel sections in manholes are not acceptable and clayware is preferable. Plastic channels are difficult to set in concrete and a satisfactory finish cannot be obtained on the benching.
- The chamber size of manholes with more than one connection in them may need to be increased to accommodate the connections and to prove that the ground condition is suitable for the plastic pipes and a site investigation report to be produced.
- INWL policy is not to accept Type "C" brick manhole and 1050mm dia manhole rings. Instead it is preferred that you use a type "B" manhole with 1200mm dia or 1500mm dia rings, with the opening sized over the channel where depth of cover to pipe soffit is 1-1.2m.
- Surface water and foul rising mains to be provided with marker tape above the rising mains.
- If plastic pipes are to be used then the following should apply:-
  - All adoptable sewers to be BS1 Kitemark (certified to WS 4-35-01).
  - Bedding and backfill material to conform to the requirements of Water Industry Specification 4-08-02 (Table A2)
- Where plastic pipes are proposed for adoptable sewers, structural calculations for the plastic pipes and a site investigation report to be produced.
- Where plastic pipes are installed into the ground prior to getting full technical approval, the developer must provide a CCTV survey of the prospectively adoptable sewers and a deflation test (Light-Line test) of the plastic pipes.
- Demarcation chambers to be a min. 450mmØ chamber for 100mmØ foul & 150mmØ surface water pipes up to 1.2m deep. For depths greater than 1.2m, restricted access opening to 350mm is required for safety reasons.
- Maximum depth of demarcation chamber to be 2m, where depth exceeds 2m, manhole to be constructed as type B manhole.
- Where a B125 cover and frame has been approved, this must not be coated in plastic and must have lifting eyes suitably sized to accommodate standard lifting keys. Screw down covers are not acceptable.
- INWL is not obliged to accept filter drain/land drainage runoff into the public sewer network or adoptable drainage system (directly or in-directly). An alternative method of disposal of the land drainage runoff will therefore be required and you will have to liaise with the Land Drainage Authority/Land Drainage Section with regard to the disposal of the filter drain/land drainage runoff is required.
- Sulphate resisting cement (C20-DCE2) and precast concrete products must be used or a laboratory report provided proving that such precautions are not necessary.
- Strength of vitrified clay pipes (if used) to be 40KN/m for 100Ø, 40KN/m for 150Ø, 45KN/m for 225Ø and 72KN/m for 300Ø. All concrete pipes to be Class 120 concrete to EN 1916/BS 5911-1:2002.
- All levels of existing drainage to be confirmed prior to work commencing on site.
- The contractor must allow for any fees required for road and sewer opening permits, sewer connections and make the appropriate applications.
- There should be enough clearance to accommodate the bedding for both pipes, approx 300mm; If crossover is near rocker then the clearance needed may be increased.

Essements will be required to all sewers outside of the public highway. Essements to be a minimum off-set 5m either side of proposed sewer. Larger pipes, attenuation tank and deeper sewers will require larger off-set distances as specified in Code for Adoption.

The attenuation has been designed based on the 1 in 100 year + 40% climate change storm event due to the topography of the site.

INWL will require future access to the attenuation tank and flow control manhole.

Flow Control Manhole S36  
CL:60.502  
IL: 58.312 800m  
L: 58.302 150m  
Design Head: 2.15m  
Discharge Rate: 3.5/s

New connection into existing SW sewer: CL:60.153  
IL: 58.006 (3754)  
IL: 58.230 (1504)  
It traced on site and confirmed. Connection subject to W approval via a S106 connection application. 21 days notice will be required.

New connection into existing FW sewer: CL:60.558  
IL: 57.868 (2249)  
IL: 57.943 (1504)  
It traced on site and confirmed. Connection subject to W approval via a S106 connection application. 21 days notice will be required.

Existing manholes will need to be inspected with a W Inspector to check that it can accommodate the new connection and to check if any remedial works are required. It may be necessary to reconstruct the manhole at the developers expense.

SUBJECT TO THE APPROVAL OF ALL RELEVANT AUTHORITIES

| REF | PIPE RUN, IL & DIA       | PIPE RUN, IL & DIA       | CLEARANCE |
|-----|--------------------------|--------------------------|-----------|
| 1   | S3a-S3<br>69.440m 150Ø   | F2-F3<br>69.978m 150Ø    | 0.388m    |
| 2   | S4-S5<br>68.942m 300Ø    | F4a-F4<br>69.630m 150Ø   | 0.394m    |
| 3   | S4a-S5<br>68.759m 150Ø   | F4-F5<br>69.228m 150Ø    | 0.319m    |
| 4   | S6a-S6<br>68.712m 150Ø   | F6-F7<br>69.091m 150Ø    | 0.229m    |
| 5   | S5-S7<br>68.075m 375Ø    | F7-F8<br>68.877m 150Ø    | 0.427m    |
| 6   | S9a-S9<br>66.958m 150Ø   | F9-F10<br>67.506m 150Ø   | 0.398m    |
| 7   | S9-S10<br>66.587m 525Ø   | F10b-F10<br>67.513m 150Ø | 0.401m    |
| 8   | S10a-S10<br>66.602m 150Ø | F10-F11<br>67.066m 150Ø  | 0.314m    |
| 9   | S10-S11<br>66.042m 525Ø  | F12b-F12<br>67.094m 150Ø | 0.527m    |
| 10  | S11b-S18<br>66.297m 150Ø | F12-F14<br>66.673m 150Ø  | 0.226m    |
| 11  | S12-S14<br>69.828m 225Ø  | F6-F7<br>70.281m 150Ø    | 0.230m    |
| 12  | S16-S17<br>69.071m 300Ø  | F13b-F13<br>69.107m 150Ø | 0.776m    |
| 13  | S18a-S18<br>67.054m 150Ø | F13-F14<br>66.585m 150Ø  | 0.319m    |
| 14  | S18-S19<br>65.517m 525Ø  | F12-F14<br>66.472m 150Ø  | 0.430m    |
| 15  | S19a-S19<br>65.591m 150Ø | F14-F15<br>65.792m 150Ø  | 0.649m    |
| 16  | S20a-S20<br>65.669m 150Ø | F16-F17<br>65.248m 150Ø  | 0.271m    |
| 17  | S20-S21<br>65.018m 525Ø  | F17a-F17<br>65.785m 150Ø | 0.242m    |
| 18  | S22a-S22<br>65.320m 150Ø | F17-F18<br>64.104m 150Ø  | 1.066m    |

FLOW CONTROL DATA S36

| MANUFACTURER | HYDRO INTERNATIONAL     |
|--------------|-------------------------|
| TELEPHONE    | 01275 878371            |
| TYPE         | HYDRO-BRAKE OPTIMUM     |
| FLOW/HEAD    | 3.5 l/s @ 2.15m         |
| HYDRO REF    | SHE-0075-3500-2150-3500 |


NOTE  
Lateral sewers to be Plastidrain (110 & 160 O.D.) in UPVC and manufactured by Hepworth or similar approved by Yorkshire Water. Demarcation chamber to be polypropylene Non-Entry Inspection Chamber up to 2.0m depth manufactured by Wavin or similar approved by Yorkshire Water to BS EN 13598-1:2003.

|    |                          |                         |        |
|----|--------------------------|-------------------------|--------|
| 19 | S23a-S23<br>62.804m 150Ø | F18-F19<br>62.157m 150Ø | 0.497m |
| 20 | S24a-S24<br>60.440m 150Ø | F19-F20<br>59.795m 150Ø | 0.494m |
| 21 | S24-S26<br>58.534m 525Ø  | F20-F21<br>58.965m 150Ø | 0.399m |
| 22 | S30a-S39<br>59.494m 150Ø | F26-F27<br>59.034m 150Ø | 0.300m |
| 23 | S39-S40<br>58.964m 225Ø  | F26-F27<br>58.536m 150Ø | 0.278m |

| K E Y |                                      |
|-------|--------------------------------------|
|       | Storm water manhole                  |
|       | Foul water manhole                   |
|       | Storm water sewer                    |
|       | Foul water sewer                     |
|       | Gully                                |
|       | Yard gully                           |
|       | Channel Drain (min B125 grade cover) |

FOR CONTINUATION SEE RIGHT

FOR CONTINUATION SEE 0425/87/03/02

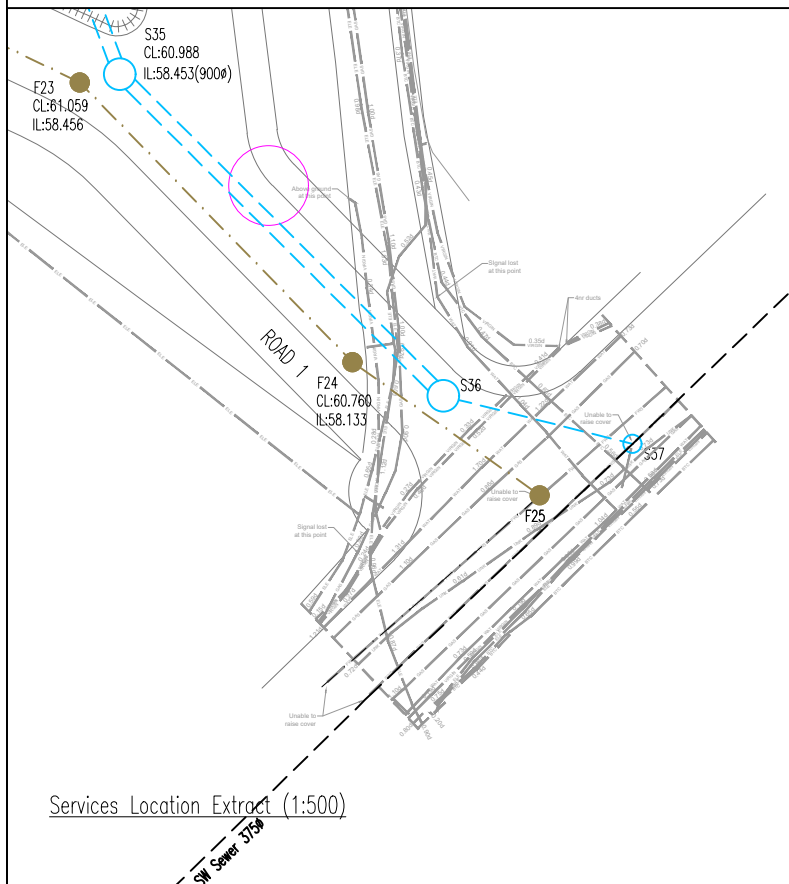

TITLE

SECTION 104 LAYOUT  
SHEET 1 OF 2

PROJECT

GYPSY LANE,  
WOMBWELL

CLIENT

MILLER HOMES  
(YORKSHIRE) LTD

DRAWING STATUS

PRELIMINARY

Scale

1:500 @ A1

Date

MAY 22

Drawn

DJG

Chk.

MI

Drg. No.

0425/87/03.01

Rev

F