

**BARNSELEY & DISTRICT AMALGAMATED ANGLERS SOCIETY
PROPOSED ACCESS & PARKING ARRANGEMENTS FOR DISABLED ANGLERS
AT WORSBROUGH RESERVOIR BARNSELEY**

Planning Ref: 2019/1356
14 January 2020

TREE SURVEY



T1 *Castanea sativa* (Sweet Chestnut) semi-mature specimen to be retained. Low split leader with cavity. Sitting at the base of a small stone retaining wall, this tree is to be protected during the course of the works where the construction of the access ramp will have minimal or no effect on the RPA.






T2 *Acer campestre* (Field Maple) small but semi-mature specimen to be retained. Base of stem malformed and constrained by stone wall. Occlusion. Sitting at the top of a small stone retaining wall, this tree is to be protected during the course of the works where the construction of the access ramp will have minimal or no effect on the RPA.




G1 *Crataegus monogyna* (Common Hawthorn) isolated section of mature hedgerow. Formerly cut at c.1.2m, this hedge is now overgrown. This group will be removed as part of the access ramp construction.



T3 *Crataegus monogyna* (Common Hawthorn) young to semi-mature specimen to be retained. Short stem. Unmanaged with low branching. Sitting at the top of a short slope, this tree is to be protected during the course of the works where the construction of the access ramp will have minimal or no effect on the RPA.

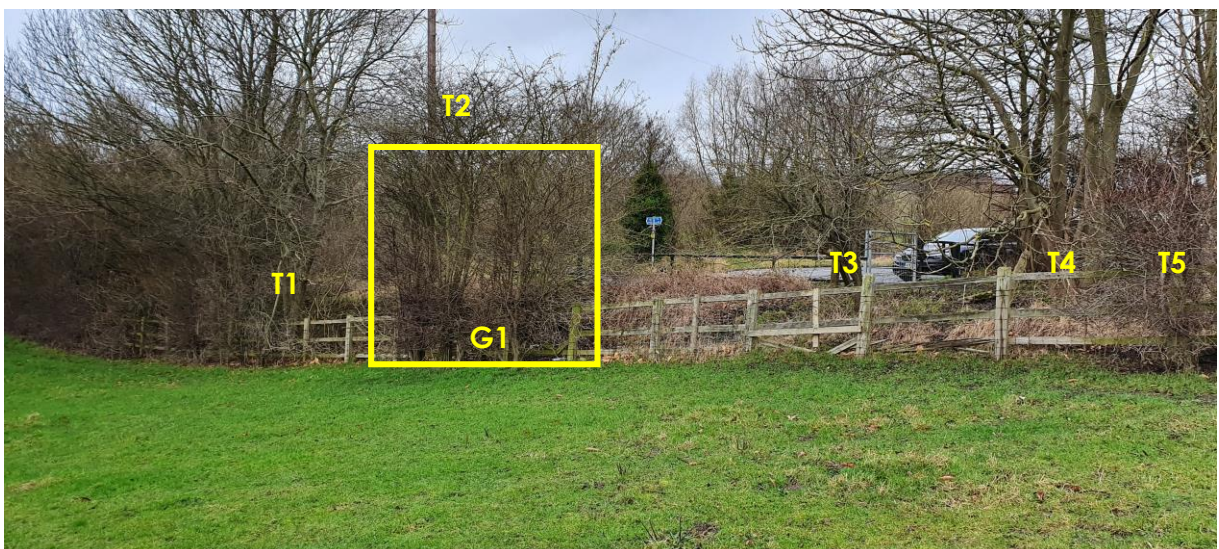

View north towards the site of the proposed gated access ramp with **G1** small section of overgrown hedge to be removed highlighted.

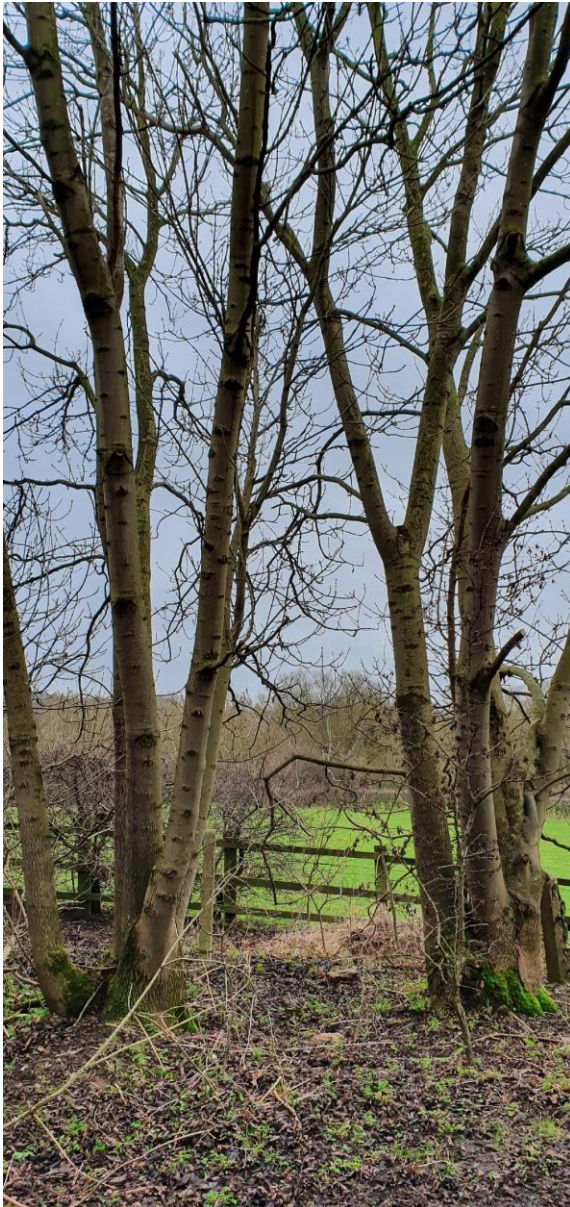

T4 and T5 *Fraxinus excelsior* (Common Ash) both semi-mature specimens are multi-stemmed from base with cavities that will present future weaknesses. Canopy and RPA clear of the proposed access track. Will not be impacted by the works.



T7 *Fraxinus excelsior* (Common Ash) young to semi-mature specimen to be retained. Short stem. Unmanaged with low branching. This specimen is unlikely to be affected during the course of the works; however, care will be taken when constructing the access track by hand digging close to the RPA.



H *Crataegus monogyna* (Common Hawthorn) predominantly hawthorn hedge with occasional *Sambucus nigra* (Elder) acting as a maintained field boundary separating the TPT from the line of the proposed access track.



T8 *Fraxinus excelsior* (Common Ash) mature multi-stemmed specimen in poor condition. Poor self-set hawthorn growing out from multi-stemmed base. Not affected by the construction works.

The area in and around the trees along the southern edge of the TPT is unmaintained with small self-sets, dead wood, and under-storey vegetation.



G2 location of the access from the proposed car park to the fishing platform through a gap in a thinning hedgerow; some hedging to be removed and pruned back.



T9 Salix spp (Willow) large mature specimen multi-stemmed from base. Located on the reservoir bank opposite the planned access from the proposed disabled anglers' car park. Unaffected by the works.



Proposed car park in the context of the reservoir and the fishing platform used by disabled anglers.