


The general contractor is responsible for the verification all dimensions on site and the architect is to be informed of any discrepancy.

The status of information contained in a computer copy of this drawing shall be limited to that conveyed by the paper copy.

Revisions:  
 Rev A 14.05.2010 TS/Chk Plot 7 204p unit removed and carport to plot 8 removed.  
 Rev B 03.06.2010 TS/Chk GF W/C window added. North west elevation amended to suite new materials. Schedule of materials up dated.  
 Rev C 14.07.2010 TS/Chk New canopy design added.

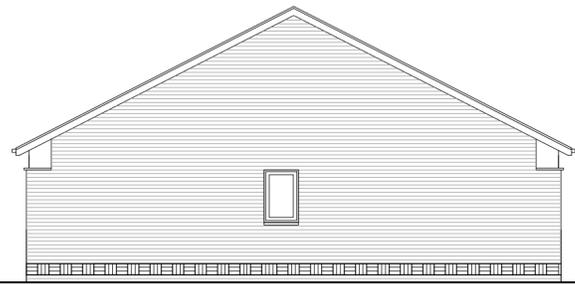

Side Elevation  
Plot 8  
South East Elevation



Side Elevation  
Plot 8  
North West Elevation

Materials Schedule:


1. Interlocking low profile flat tile (dark grey)
2. Through coloured Render Sto, Weber or similar approved system
3. 'Scraped' smooth finish (blue grey)
4. FL quality through coloured Facing Brickwork (red)
5. Alternating soldier & stack bonded feature band
6. Projecting Oriel window zinc wrapped
7. Double glazed Softwood windows, stained finish from renewable managed European Forests
8. Timber Security door to achive PAS-24 Manse Masterdor or similar approved.
9. Standing Seam Canopy
10. Solar Panels



3B5P Bungalow - Front Elevation  
Plot 8  
North East Elevation



3B5P Bungalow - Rear Elevation  
Plot 8  
South West Elevation

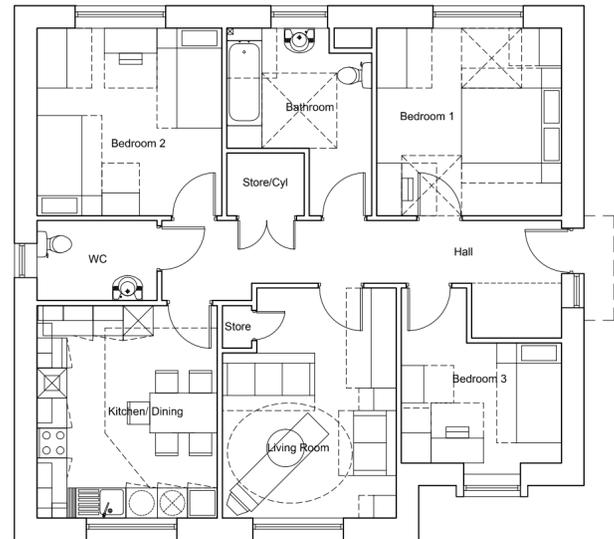

3B5P Bungalow - Plot 8  
3B5P Bungalow Ground Floor 1:50  
Plot size - 99.5m<sup>2</sup>



Roof Plan



drawing status  
 approval  
 construction  
 preliminary  
 record  
 information  
 comment  
 tender

Scale 1:100 @ A2  
 Date November 2009  
 Drawn RJJ  
 Dwg.No 2121.30.042C

# Plan & Elevations

## Plots 8

### Edwins Close, Barnsley

### Yorkshire Housing

