


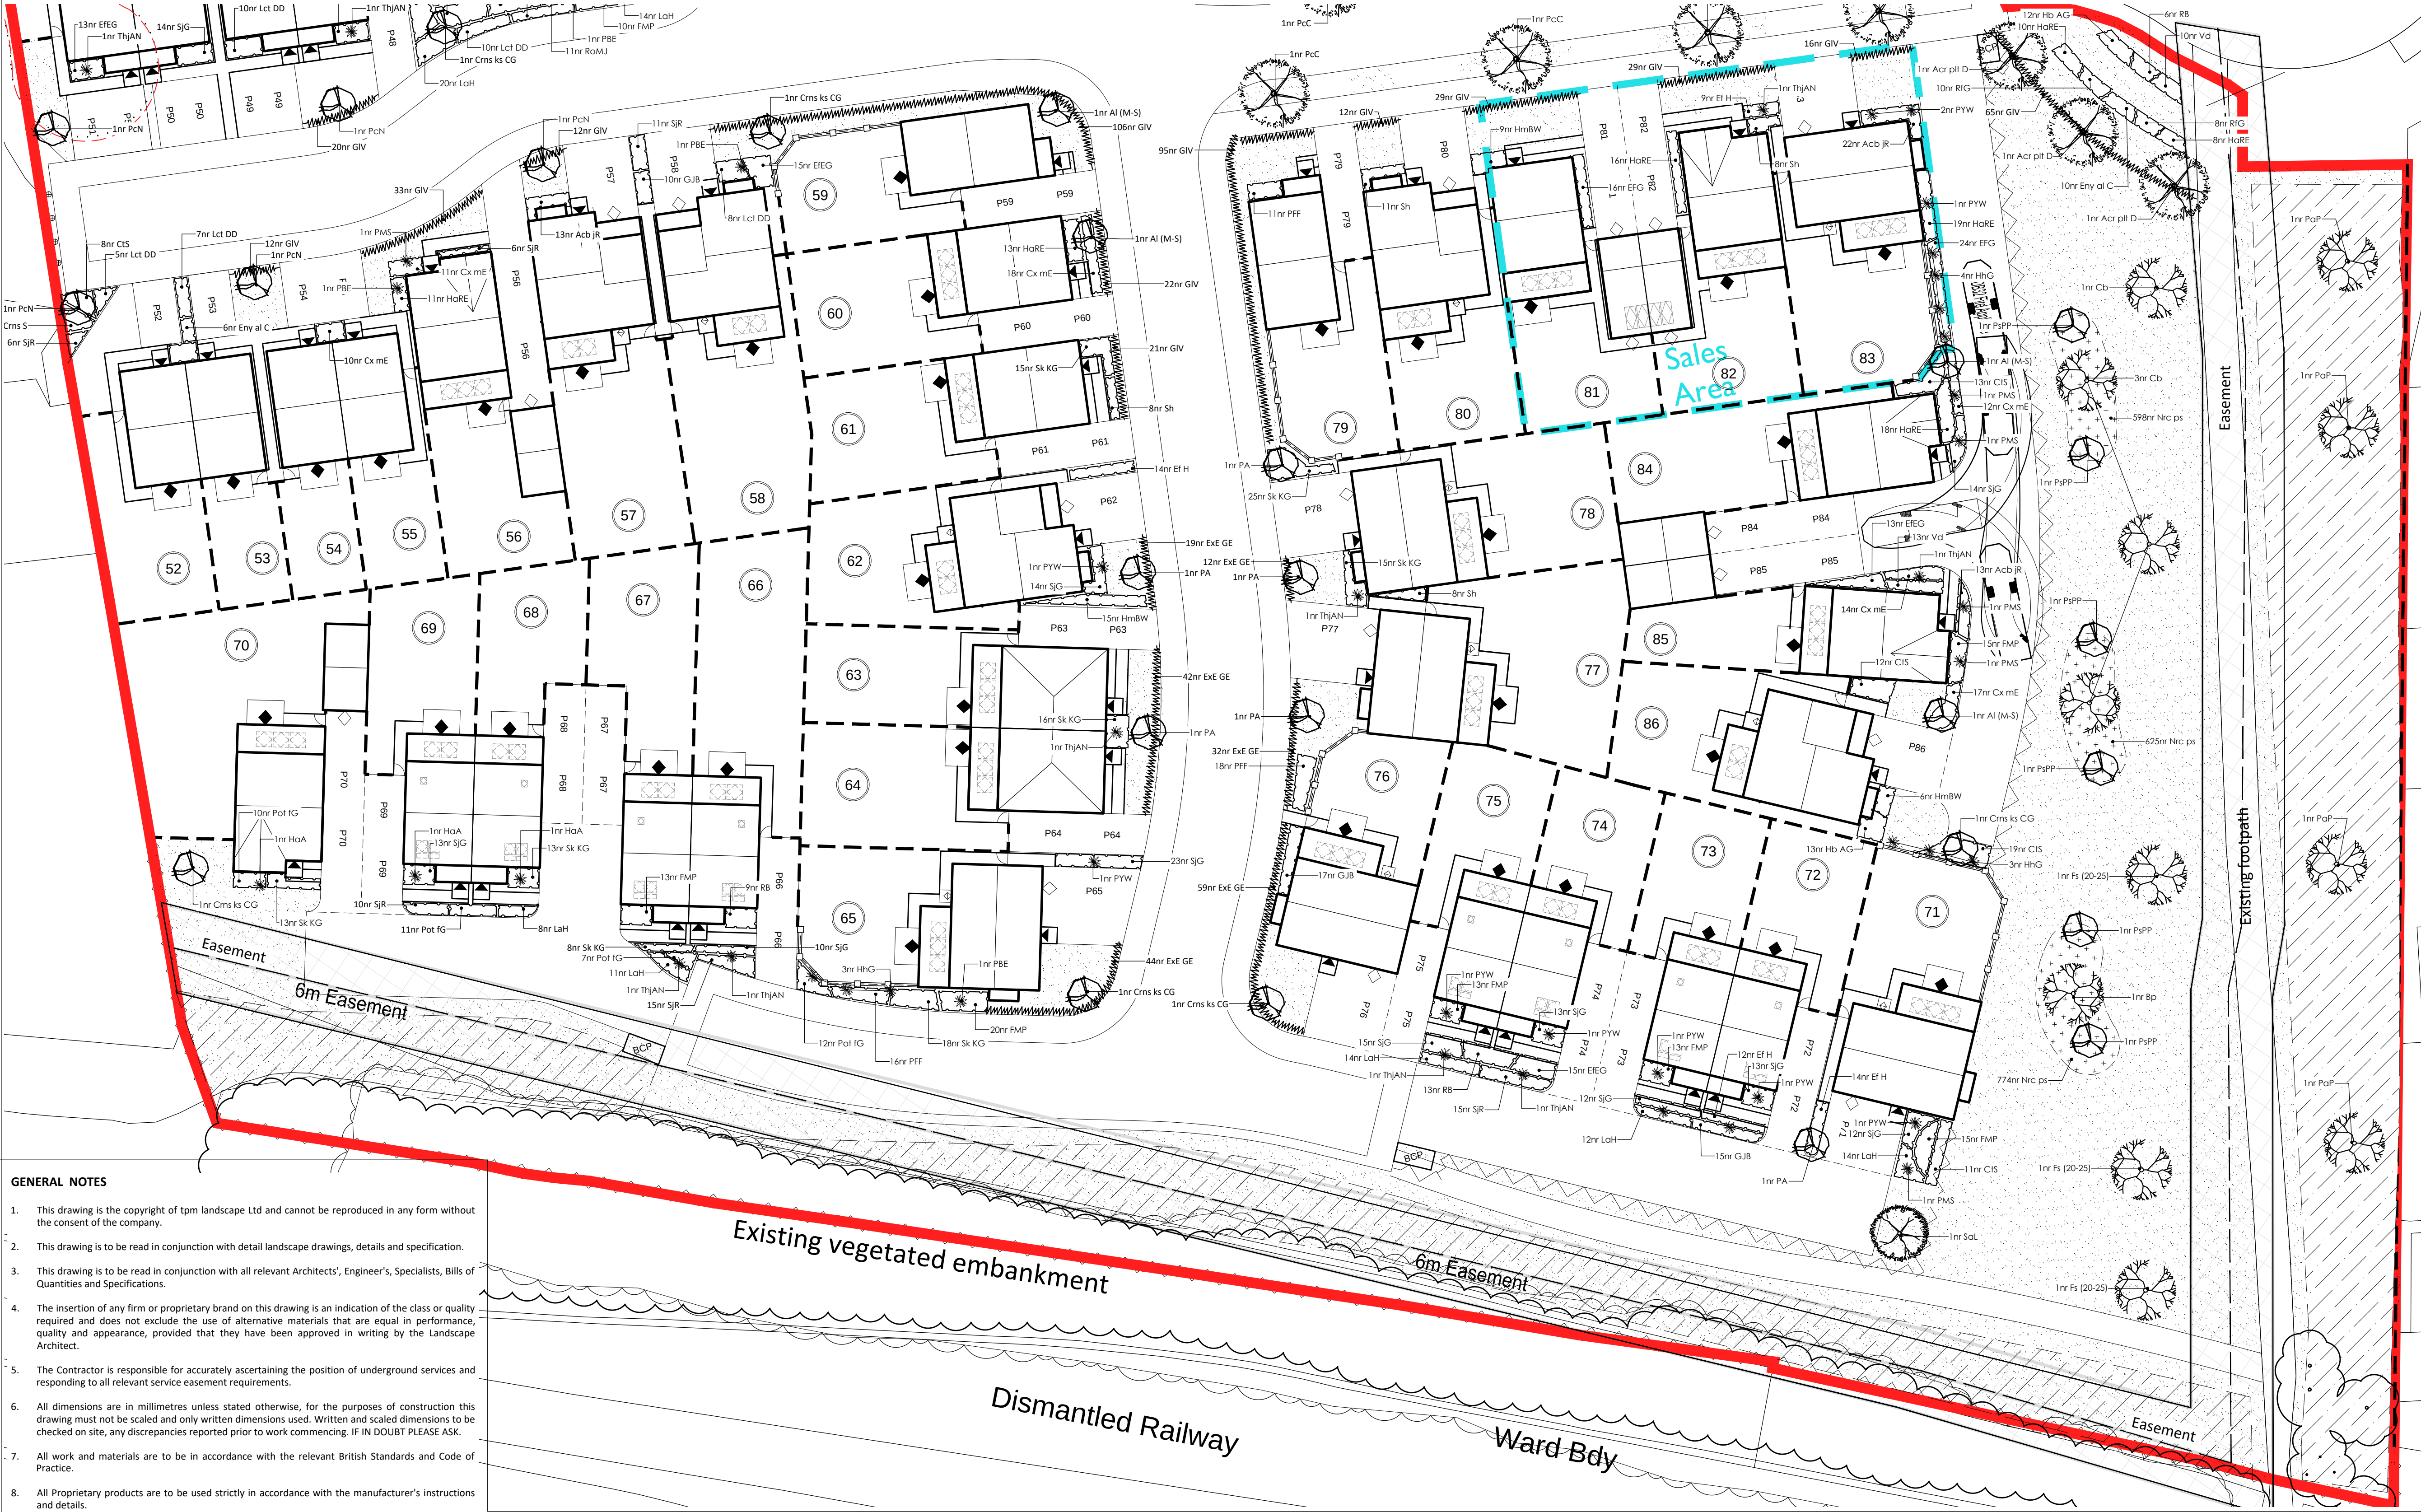

- GENERAL NOTES**
- This drawing is the copyright of tpm landscape Ltd and cannot be reproduced in any form without the consent of the company.
 - This drawing is to be read in conjunction with detail landscape drawings, details and specification.
 - This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
 - The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
 - The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
 - All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
 - All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
 - All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

- NOTES ON PLANTING**
- Topsoil / Subsoil:** Topsoil shall be spread to min 450mm depth over planting beds and 150mm depth over turf areas and graded to fall. Topsoil should be in accordance with BS3882:2015 and where subsoil is required, to be in line with BS6801:2013. It is recommended that samples are tested with Certification and Analysis Reports with a concise analysis. To be provided to the Landscape Architect / Client for approval. If the soil doesn't meet the BS standard specialist advice should be received to see if the soil can be improved.
 - Herbicide and Cultivation:** Topsoil to be treated with an application of herbicide prior to planting, where necessary, strictly in accordance with the Control of Pesticides Regulations 1986 (or otherwise updated / superseded legislation), and following manufacturers instructions and undertaken by qualified staff. The topsoil shall then be cultivated to 150mm depth)
 - Container Grown Shrubs, Transplants and Whips:** Shrubs and transplants shall comply with the National Plant Specification. Shrubs shall be planted in pits 300 x 300 x 200mm depth, and the backfill shall include 3 litres Peat Free Tree and Shrub Compost. Specimen plants to be planted in a pit 400 x 400 x250mm depth with 5 litres Tree and Shrub Compost. BR whips should be notch planted as required and healed into position. All whips to be protected by a spiral bound shrub guard secured into place with a timber cane. When in public locations it may be necessary to have caps to the canes. Hedgerow planting to be planted in a double staggered row at 300mm centres.
 - Herbicide:** Spot treat with herbicide throughout the maintenance period in accordance with the manufacturer's instructions.
 - Bark Mulch:** All Ornamental Planting beds to receive 75mm depth pulverised ornamental bark mulch.
 - Position of Plants:** Final position of trees and shrubs subject to confirmation of service location and approval of statutory undertakers.
 - On excavation of the tree pit** a bucket test should be undertaken to review the water infiltration. Certain species of trees will decline if the ground drainage is poor. Monitor the water egress. If water sits for long periods or doesn't

- drain the pit may require further works to break up the ground. A clean stone drainage layer may assist to ensure that the root ball isn't sat within standing water.
- TREES - SELECTED STANDARDS** Tree pits for selected standards to be 600x600x600mm backfilled with sub soil and 300mm topsoil. Stakes to be 65mm diameter treated softwood driven firmly into the ground. Stakes to be 600mm above ground level and fixed to tree with suitable rubber tree tie.
- TREES - EXTRA HEAVY STANDARDS** Tree pits for extra heavy standards to be 600x600x600mm backfilled with sub soil and 300mm topsoil. Stakes to be 65mm diameter treated softwood driven firmly into the ground. Stakes to be 600mm above ground level and fixed to tree with suitable rubber tree tie.
- TREES - SEMI-MATURE STANDARDS:** Tree pit 1200x1200x900mm depth back filled with sub soil and 300mm of good quality topsoil. Stakes to be 3nr 100mm diameter with cross bar, treated softwood driven firmly into the ground. Double stakes to be 1000mm above ground and fixed to tree with suitable rubber tree ties (with the tree in the middle). Trees to be planted with an irrigation pipe (to wrap around the rootball of the tree) and secure the end of the pipe to the tree stake.
- 8 Watering:** Plant only into moist soil and water thoroughly to the full depth of soil immediately after planting. Water regularly through the establishment period (minimum 3 months) to prevent dehydration. The trees should be watered through the irrigation pipe to ensure that the water gets down to the rootball. These trees should be watered regularly throughout spring-summer during the first 2 years to ensure that the tree root system establish well.
- 9 Wildflower Meadow:**
Timing - Sow meadow during March and April or in September. When sowing into heavy soils, sow in March/April to avoid seeds/seedlings rotting in waterlogged soils.
Ground Preparation -
• Control or remove weeds before sowing. For small areas, remove weeds by hand. For larger areas, a weed suppressing membrane or black plastic can be laid over the area 3 months prior to sowing to prevent weed growth. For larger areas and where vigorous perennial weeds, such as nettles, docks and dandelions, are present

- in large number, non-chemical control methods may not be effective. In these situations instead spray off existing vegetation using non-residual systemic glyphosate-containing weedkillers. Spray applications may be required more than once dependant on the site and time of year. Eradication of weeds is essential to the success of the establishment of the wildflower meadow.
- Rotavate soil and rake to make even seed bed
- Sowing -
- Wildflower meadow to be sown at 4 g per m2.
 - Mix wildflower seed with silver sand to aid even seed distribution and to show area that have been covered.
 - Sow half lengthways and half widthways for even coverage.
 - Rake in seeds lightly
 - Do not sow seed if heavy rain is forecast
- 10 Grass Seeding:** Sow late summer to mid autumn. Prepare ground by removing any existing vegetation, large stones and roughly levelling. An application of non-residual systemic glyphosate containing weedkiller may be required. Grass seed should be spread at 50g per metre squared After sowing, lightly rake over area and water.
- 11 Turf:** Complete ground preparations before turf is delivered to site to avoid turf drying out. Turf should be laid immediately on delivery. Remove all existing vegetation from area to be turfed and spread 150mm depth of top soil. Dig over or rotavate soil before laying turf if soil is compacted. Rake,lightly compact, and water soil. Stagger the joints when laying the turf. Water turf after laying and every day for the next 2-3 days, especially in periods of low rainfall.
- 12 Soil compaction** is likely to have occurred during construction on site. A site inspection should be carried out by a landscape professional to assess the level of soil compaction, including drainage testing to see if the ground is likely to become waterlogged. If the ground is deemed to be too compacted for plant growth and to drain adequately then remediation works should be carried out. This could include rotavation of the soil using a push along rotavator and/or ground being broken up with spades or small machinery. A second site inspection should then take place to ensure that the soil is fit for purpose.

- LEGEND**
- Existing Trees to be Retained
 - Existing Trees to be Removed
 - Proposed Spine Road Trees**
Trees to be planted as 30-35cm girth, Semi-Mature, 6-8m high with 2.5m clear stem. Trees to be secured with underground guying system.
 - Proposed POS Trees**
Trees to be planted as 20-25cm, Semi-mature, 4.5-6m high with 2m clear stem. Trees to be secured with underground guying system.
 - Proposed Medium Size Ornamental Trees**
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 3.5-4m high. Trees to be staked and secured with suitable rubber ties.
 - Proposed Small Ornamental Trees**
Trees to be planted as 10-12cm girth or 50L containers, 2-3m high and secured with single stake and suitable rubber ties.
 - Proposed Hedgerows**
Evergreen hedgerows to be planted in 10L containers at a rate of 3 per lin. metre.
 - Proposed Shrub Planting**
Ornamental shrub planting, to be planted in 3-4L containers at 3-4 p/m², and enhanced by feature specimens in 10-20L pots.
 - Proposed Wildflower Meadow**
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.
 - Proposed Amenity Grass**
Front gardens to be turfed. Back gardens to client specification.

REFER TO DRAWING
3456 - 202 FOR
PLANTING SCHEDULE



REVISION NOTES			
Rev	By	Description	Date
A	TJ	Updated in line with Masterplan	12.11.20

Client Countryside Properties			
Project Kingsmark Way, Goldthorpe			
Description Planting Plan (sheet 3 of 3)			
Status For Approval			
Scale @ A1 1:250	Drawn MW	Checked DC	Date 10.03.20
Job number 3456	Drawing number 203	Revision -	