


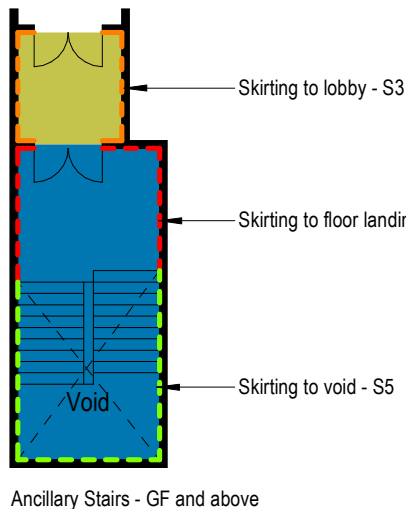

1 : 200

FINISHES KEY - To be read with specification

Finishes Legend

1	4
2	3
F	S

1-4 - Wall Finish
F - Floor Finish
S - Skirting Finish

Floor Finishes	
	F1 - Bay Finish
	F2 - 32-resistant concrete floor tiles to Liberty
	F2A - 32-resistant concrete tiles to Toledo
	F3 - 32-resistant (Durable Gauge) vinyl sheet to Service Corridors, NBS: M50 150A
	F4 - Same as finish
	F5 - 32-resistant (Durable Gauge) vinyl sheet to Stair, OS: NBS: M50 190
	F6 - Concrete dust sealant to Stairs, NBS: E41 520
	F7A - Watco Safety Coat Cold Cure Co. in Plant Area, NBS: M12 180
	F7B - Broadband reinforced latex curing highly clear bridging colored cast floorings system NBS: J11 111A
	F7A - Top deck waterproofing system in Plant Area, NBS: J11 111A
	F7B - Broadband reinforced latex curing highly clear bridging colored cast park ramp system, NBS: J11 1112A
	F9 - Sealed brushed concrete to SE specification
	F10A - Acoustic floor by Landis, Finish by Topan
	F10A - Acoustic floor to void former by Landis, finishes by Topan
	F11 - Acoustic finishes by Topan (Crenwood).
	F12 - Crenwood Opti-Finish Acoustic Checkmark Rev C dated March 2017 Section B Item 6.6
	F12 - Finish by Landis - TBC

NOTE:

- Thermoplastic lining for parking/ road/ zoning demarcation TBC
- Screen seating and WC finishes by Tenant

Wall Finishes

- W1 - By Tenant
- W2 - Porcelain wall tiles to Toilets; natural finish 300 x 600mm
- W3 - Paint - Durable Matt / Eggshell; NBS: M50 150A
Paint - Masonry to stairs/ service corridor; NBS: M60 170
- W4 - Porcelain splashback tiles
- W5 - Paint - Mist coat and sealer to Plant areas; NBS: M50 110A
- W6 - Feature porcelain wall tiles to Lift Lobby
- W7 - Paint - Mould inhibiting Matt
- W8 - Masonry paint to MSPC; NBS: M60 170A. Colour - RAL 7032 Pebbly Grey
- W9 - Steelwork decorative paint; NBS: M60 195A Colour - Level 2 - Golden Yellow
Level 3 - Signal Orange
Level 4 - Coral Red
Level 5 - Pastel Violet
Level 6 - Rasheda Green
Level 7 - Pastel Turquoise

Skirting Finishes

- S1 - By Tenant
- S2 - Porcelain covered tiles to Lift lobby
- S2A - Porcelain covered tiles to Toilets
- S3 - Self covered vinyl to Service Corridors
- S4 - MDF painted - Durable Acrylic Eggshell, NBS: P20/200 & M60/155A
- S5 - None
- S6 - Sit-on covered vinyl

Ceilings
Refer to ceiling plan drawing series G332 for details.

Car Park Colour Zones

- 1 - Colour zone 1 to parking spaces. Colour : Traffic Blue
- 2 - Colour zone 2 to pedestrian walkways. Colour : Tile Res
- 3 - Colour zone 3 to roads. Colour : Dark Grey
- 4 - White markings
- 5 - Perimeter kerb upstands / islands - Colour : Mid grey
- 6 - Yellow cross hatching

DOWN 7 - Road Marking - All wording and heights to be confirmed by
EXIT highways engineer

- 8 - Yellow Hazard marking to kerbs.
- 9 - Vehicle Restraint barrier

- **NOTES:**
- This drawing is copyright.
- Do not scale dimensions from this drawing.
- This drawing is to be read in conjunction with all other relevant drawings.
- All discrepancies on this drawing are to be reported to the architect.
- Do not modify any element of this drawing.
- Use drawing only for purpose(s) issued.

The following external model files are included within this drawing

 Intelligence Buildings Infrastructure	Project The Glass Works Barnsley Development Siles ZB & ZC		Drawing Title ZC - Internal Finishes - Sixth Floor
	www.ibigroup.com		
Drawing Number BGW2-IBI-ZC-06-PN-A-G330-0008	JOB Number 30/27	Date Created 29/01/2019	PAS T192 Status Code A
	1st @/SACS 1 : 200	Purpose Construction	Revised
			P04