


The general contractor is responsible for the verification all dimensions on site and the architect is to be informed of any discrepancy.  
The status of information contained in a computer copy of this drawing shall be limited to that conveyed by the paper copy.

**Design Criteria**


Site to comply with the following design criteria subject to confirmation of the form of construction and assessment by an external accredited assessor.

**Revisions:**


Rev	Description	Date	Issued by
P1	Initial issue.	-	SP/DRP

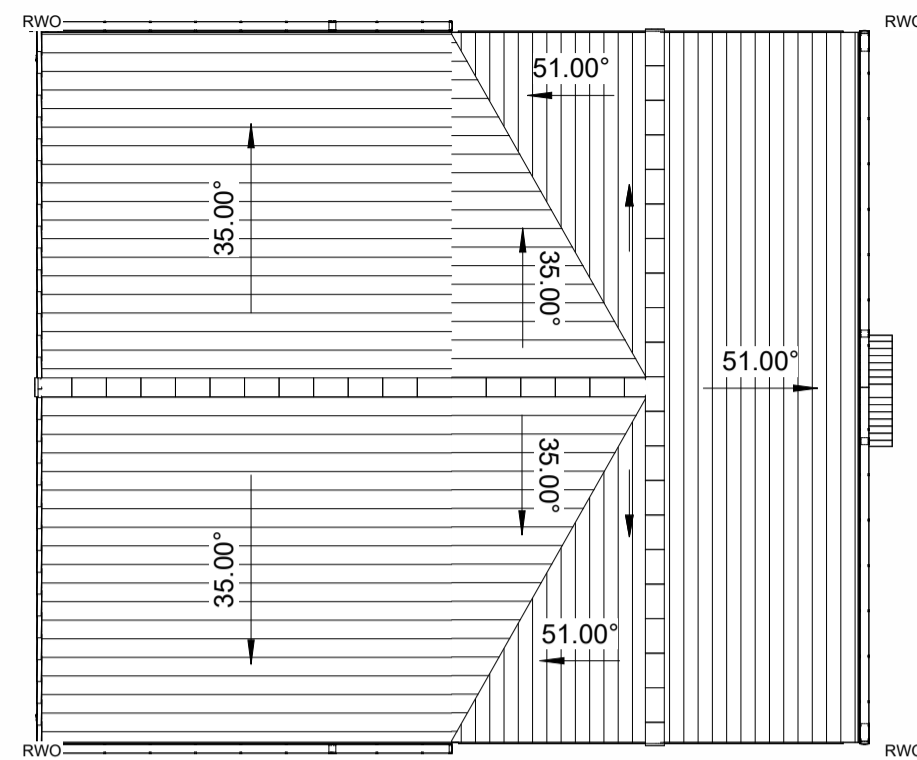

**Roof Plan**  
1 : 100

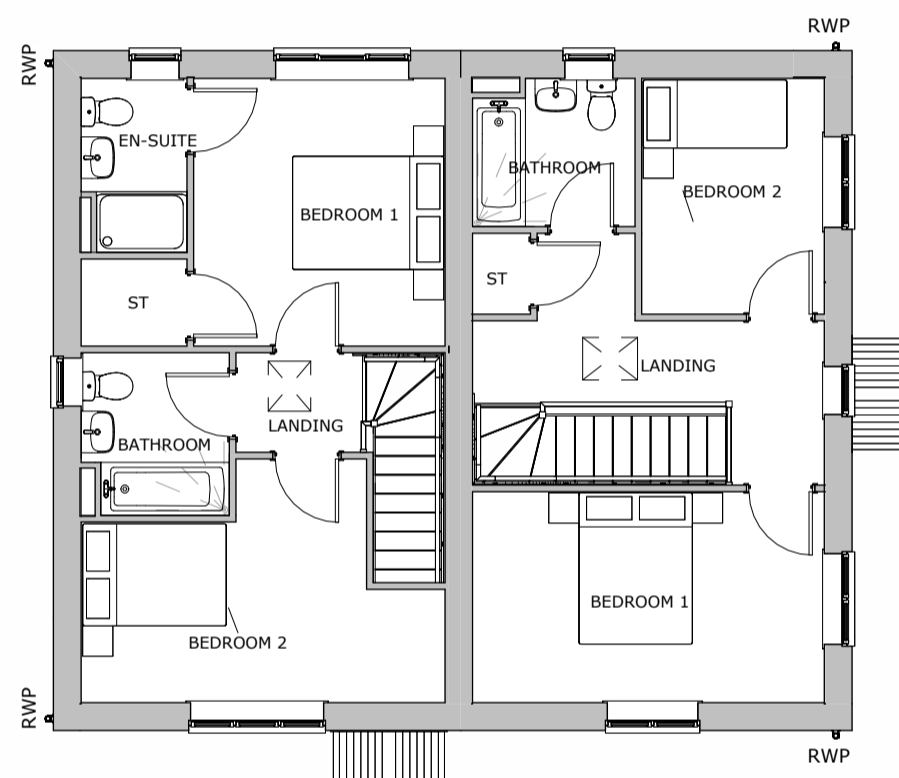

**First Floor**  
1 : 100

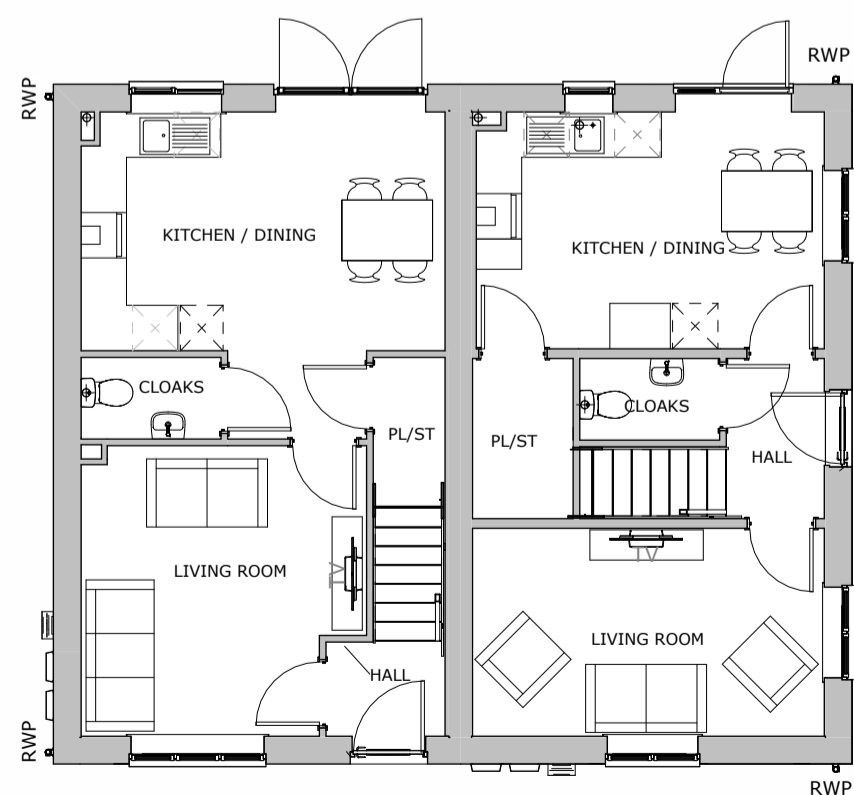

**Ground Floor**  
1 : 100



**Front Elevation**  
1 : 100



**Side Elevation**  
1 : 100



**Rear Elevation**  
1 : 100



**Side Elevation**  
1 : 100

**Material Schedule:**

- External walls - Through coloured render colour - off white.
- Main Body facing brickwork colour -red multi.
- Soldier course feature brickwork detailing, heads& cills, colour - dark red.
- White UPVC window/patio door frames.
- PAS24 external door - HT236 (Green) HT241 (Red) (white insides).
- Black UPVC half round / polypipe gutters & square profile down pipes. Dark Grey UPVC fascias.
- Boxed eaves detail.
- GRP door canopy design to be confirmed.
- Concrete interlocking roof tiles - dark grey.

**Key:**

- G. Gas Meter Box.
- E. Electric Meter Box.
- EV. Electric Vehicle Charging Point - Indicative position shown (subject to location on site plan. (DWG no. 4035-49-AWSM-XX-XX-DR-A-002).
- PV. Indicative PV zone. Position, amount and location to be determined on plot by plot basis. Subject to MEP design.
- Obscure Glazing.

Notes:  
Ground levels are indicative, refer to engineers levels drawings.

**Vistry Group**

Scale	1 : 100 @A2
Date	Feb.2026
Drawn/Checked	SP /NG
4035.49-AWSM-XX-XX-DR-A-130	
Status	S3
Rev	P1

**ACANTHUS ARCHITECTS**

Plots  
11&12

**HT 241+236**  
**Semi-Detached**  
**Shaw Lane, Carlton**