



-

Uniform footprint of models (14.16hp)
allows contiguous side-by-side installation

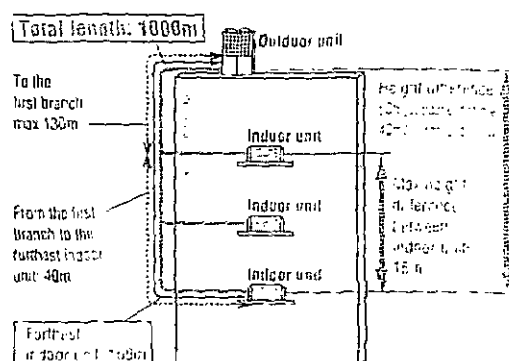

Specifications

Item		Model			
Nominal horse power				14HP	16HP
Power source				3 Phase 380-415V, 50Hz	
Nominal capacity	Cooling	kW	40.0		45.0
	Heating		45.0		50.0
Electrical characteristics	Starting current		A	8	
	Power consumption	Cooling	kW	11.27	12.97
		Heating		11.73	13.10
	Operating current	Cooling	A	18.4-16.9	21.1-19.3
		Heating		19.6-17.9	21.7-19.9
Exterior dimensions		HxWxD	mm	1690x1350x720	
Net weight			kg	317	
Refrigerant charge		R410A	kg	11.5	
Sound pressure level		Cooling/Heating	dB(A)	59.5/60	62.5/62.5
Refrigerant piping size		Liquid mm Gas line	mm(in)	ø12.7(1/2") ø25.4(1")/ø28.6(1 1/8") ø19.0(3/4")	
Capacity connection		%		50-200	
Number of connectable indoor units			36	1	40

1. The data are measured with the following scale: (1) = "nothing at all", (2) = "a little", (3) = "moderately", (4) = "a great deal", (5) = "very much".