



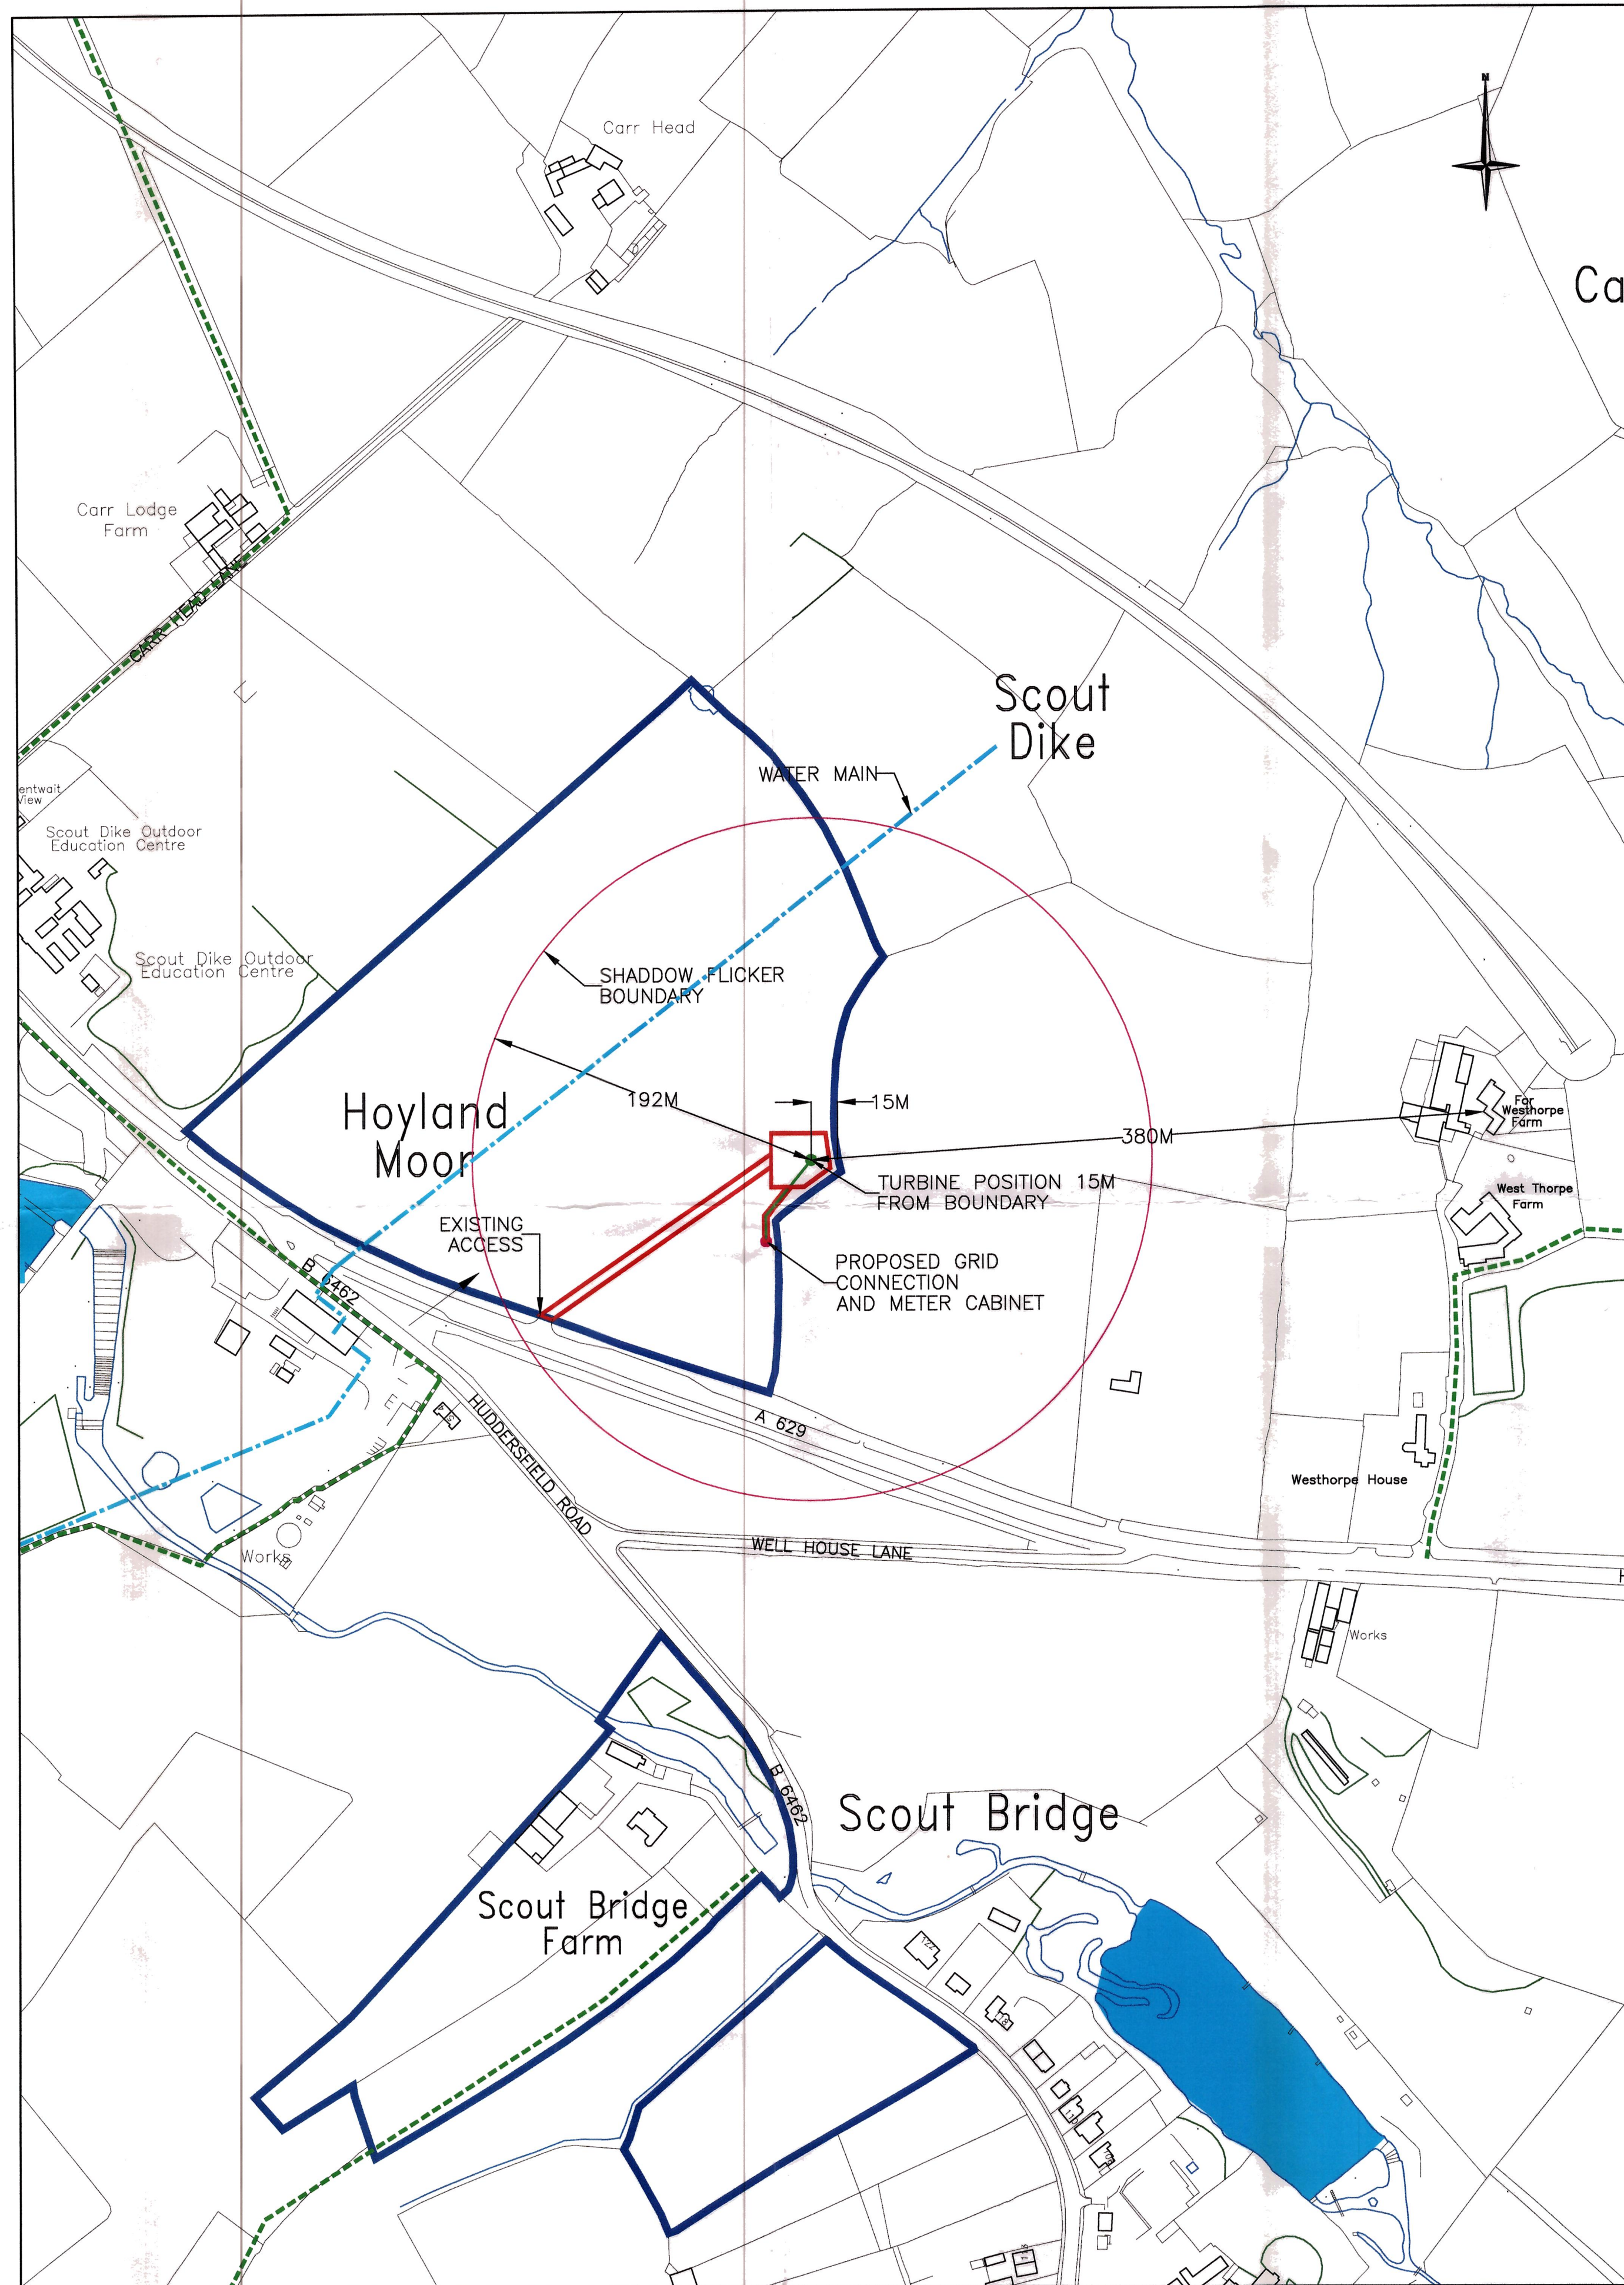


BLOCK PLAN

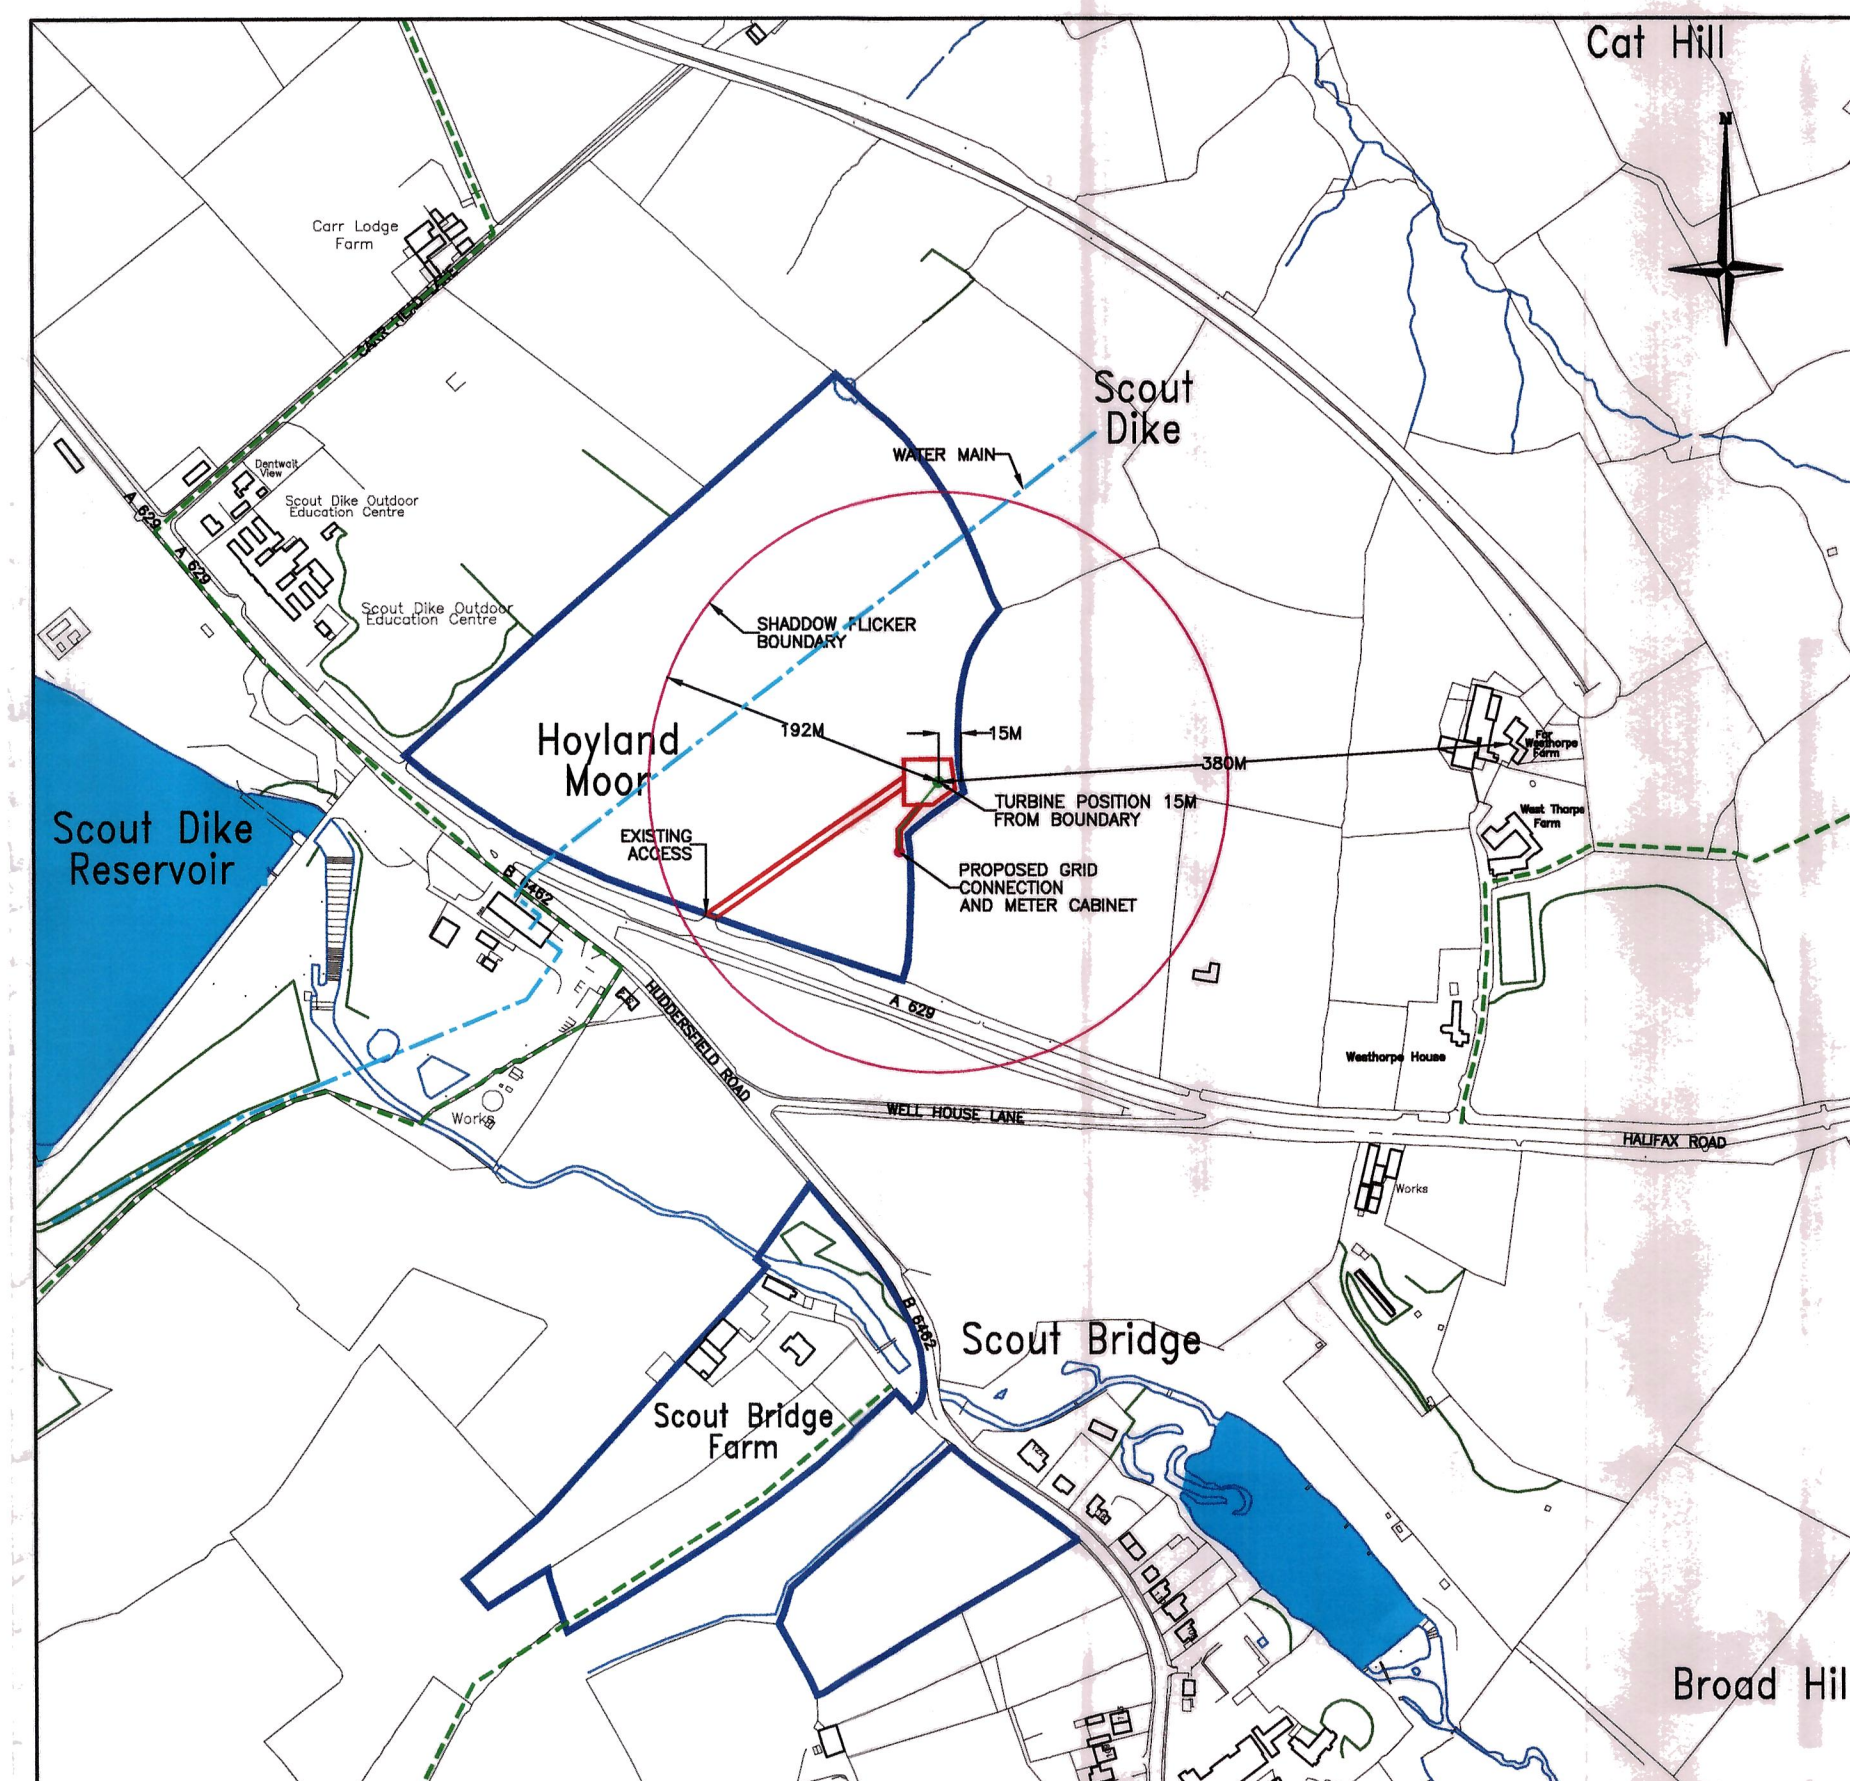

LOCATION PLAN

- KEY
- EXISTING FOOTPATH (ALSO SEE D+A STATEMENT)
 - STAND OFF ZONE
 - APPLICATION SITE
 - OWNERSHIP
 - CABLE CONNECTION
 - PROPOSED 50kW ENDURANCE WIND TURBINE
 - CONTOURS ALSO SEE D+A STATEMENT
 - ACCESS FOR DELIVERY, ERECTION AND ENGINEERING WORKS ONLY
 - SHADOW FLICKER BOUNDARY
 - GRID CONNECTION INCLUDING 2.0 x 2.0m HIGH x 1.0m WIDE METER CABINET COLOUR RACING CAR GREEN
 - WATER MAIN

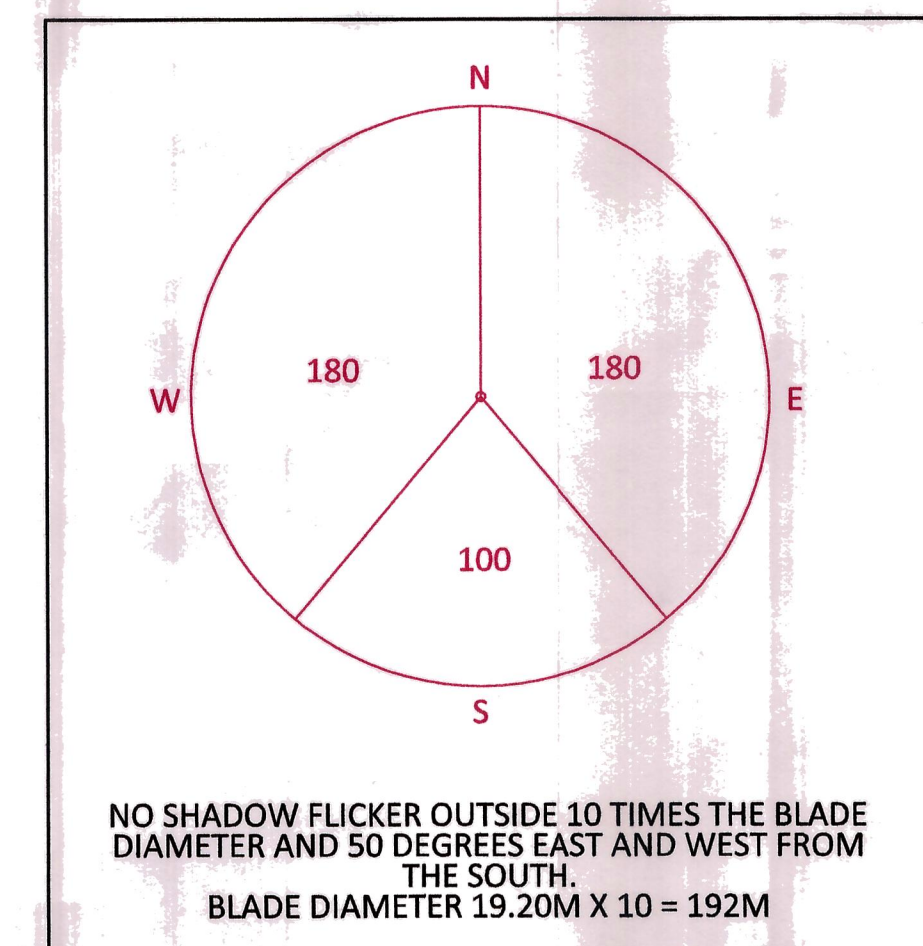

SHADOW FLICKER

COPYRIGHT	
NOTES	
Notes Public Roads and Footpaths The ideal separation distance between the proposed Endurance Wind Turbine and public road / footpaths is no less than Turbine Tip height plus 10% - 34.60m + 3.46m = 38.06 Say 39.00m Planning Fees This is an extract from the Planning Fees regulations. 40. Wind turbines are Category 5 for fees purposes (unless of the small domestic type, where installation should be treated as an alteration or curtilage operation in Category 6 or 7a if not allowed as permitted development). To calculate the fee for a new windfarm, add all the land over which the blades of each turbine can rotate and to the area of the footprint of any ancillary structures and engineering works. It is not necessary to include within the red line(s) on an application to put up wind turbines any other land between the turbines if no development is proposed there. On a site of no more than five hectares, £335 should be charged for each 0.1 hectare. Over five hectares, a fixed sum of £16,565 is payable with an additional £100 for each 0.1 hectare in excess of the first five hectares, subject to a maximum in total of £250,000.	
RED LINE BOUNDARY TURBINE = 908 CABLE RUN 60 X 1.0 = 60 METER CABINET = 20 TOTAL = 988 =0.10H	
Turbine Location Grid Reference 424006 - 404824	
TELEPHONE 0113 2525825 DESIGN AND BUILDING SERVICES LAND SURVEYS - COMPUTER AIDED DESIGN - QUANTITY SURVEYORS BUILDING SERVICES	
CLIENT MR. R. AUCKLAND SCOUT BRIDGE FARM 17, HUDDERSFIELD ROAD PENISTONE S36 7BX	
PROJECT PLANNING APPLICATION PROPOSED INSTALLATION OF 1NO 50kW ENDURANCE WIND TURBINE ON A 25M MONOPOLE MAST, ON LAND AT SCOUT BRIDGE FARM, 17 HUDDERSFIELD ROAD, PENISTON. S36 7BX	
TITLE LOCATION PLAN, BLOCK PLAN AND CONTOUR PLAN	
SCALE BLOCK PLAN 1:2500 LOCATION PLAN 1:5000 CONTOUR MAP 1:25000	
DATE OCTOBER 2012	
DRAWN BY MJC	
CHECKED	
DRAWING NO 119-P01	
REVISION	