

LEGEND

Scale 1:200

KEY

HARDWORKS

- Pedestrian tarmacadam surface
- Dense bitumen macadam (roads and vehicular routes)
- PCC paved path
- PCC paved patio
- Buff coloured 'Fibredec' (Fine natural gravel sealed in glass fibre and bitumen emulsion) or similar approved.
- Building outline
- Bin storage
- Single gate
- Double gate
- Bollard
- Dense bitumen macadam (private driveway)
- Entrance piers and low wall

FENCES

- New 2.1m Paladin Type Fence
- New 1.8m close boarded timber slatted fence with 90% 9m runs of 50mm gaps to allow through plant growth.
- New 1.5m close boarded timber slatted fence.
- New 1m Railing
- New Knee Rail

SOFTWORKS

- Grass
- Bulb / Wildflower planting
- Shrub planting/Gardens
- Native structure planting
- Proposed trees / woodland vegetation
- Existing trees / vegetation to be retained and protected

Barnsley Metropolitan Borough Council
05 NOV 2008
Development Control

Revision	By	Chkd By	Date	Comments

SLR
SALORS BETHEL
HORATIO STREET
NEWCASTLE UPON TYNE
TYNE AND WEAR, NE1 3PE
T: 0191 261 1966
F: 0191 230 2340
www.slrconsulting.com

Client
JAMESTOWN METAL RESOURCES

Project
STOCKS LANE, BARNSLEY

Drawing Title
GENERAL ARRANGEMENT

Project File Reference	Drawn By
415.000044.16.GA.001.DWG	JW
Status: 1:200@A0	Date: OCTOBER 2008 — Chkd By: NJ
Drawing Number: 415.000044.16.GA.001	Revision: -

PLANNING

Proposed Planting Schedule

Trees

No.	Abbrev	Species Name	Height	Specification	Density
40 No.	ACECAM	Acer campestre	350-425cm	Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	
13 No.	ACEPLEQ	Acer platanoides 'Emerald Queen'	400-450cm	Extra Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	
31 No.	BETNI	Betula nigra	200-250cm	Multi-Stemmed: Bushy 3 Stems min.: 3x: RB	
11 No.	BETPE	Betula pendula	350-425cm	Heavy Standard: 5 brks: 3x: RB; Clear Stem 175-200cm	
6 No.	BETPED	Betula pendula 'Dalecarlica'	350-425cm	Heavy Standard: 5 brks: C; Clear Stem 175-200cm	
339 No.	FAGSYPU	Fagus sylvatica 'Purpurea'	175-200cm	Feather: 3 brks; 2x: B	3/m²
9 No.	FRAEX	Fraxinus excelsior	350-425cm	Heavy Standard: 5 brks: 3x: RB; Clear Stem 175-200cm	
15 No.	SORAU	Sorbus aucuparia	350-425cm	Heavy Standard: 5 brks: 3x: B; Clear Stem 175-200cm	

Total :464 No.

Conifers

No.	Abbrev	Species Name	Specification
14 No.	PINSY	Pinus sylvestris	Leader & Laterals: 5x: RB

Total :14 No.

Shrubs

No.	Abbrev	Species Name	Specification	Density
12 No.	AMECA	Amelanchier canadensis	Multi-Stemmed 5 Stems min.: Branched: 2x: RB	
125 No.	CORALA	Cornus alba 'Aurea'	Branched: 4 brks: C	3/m²
14 No.	COTSAE	Cotoneaster 'Exburiensis'	Branched: 5 brks: C	3/m²
126 No.	EUOFODB	Euonymus fortunei 'Dart's Blanket'	Bushy: 5 brks: C	3/m²
197 No.	HEBMB	Hebe 'Midsummer Beauty'	Bushy: 7 brks: C	3/m²
44 No.	LAVANHI	Lavandula angustifolia 'Hidcote'	Bushy: 5 brks: C	3/m²
93 No.	LONNIMG	Lonicera nitida 'Maygreen'	Bushy: 8 brks: C	3/m²
8 No.	PHOBB	Phormium tenax 'Bronze Baby'	Triple crown: C	
8 No.	PHOFRRER	Photinia x fraseri 'Red Robin'	Branched: 6 brks: C	
182 No.	SKIJARU	Skimmia japonica 'Rubella'	Bushy: 4 brks: C	3/m²
358 No.	VINMA	Vinca major	Several Shoots: 3 brks: C	4/m²

Total :1167 No.


Bulbs

No.	Species Name	Abbrev	Specification	Density
2408 No.	Crocus chrysanthus 'Blue Pearl'	CROCHBP		20/m²
774 No.	Narcissus 'Bridal Crown'	NARBC		10/m²

Grasses

No.	Abbrev	Species Name	Specification	Density
187 No.	MISSIG	Miscanthus sinensis 'Gracillimus'	Full Pot: C	3/m²

Total :187 No.

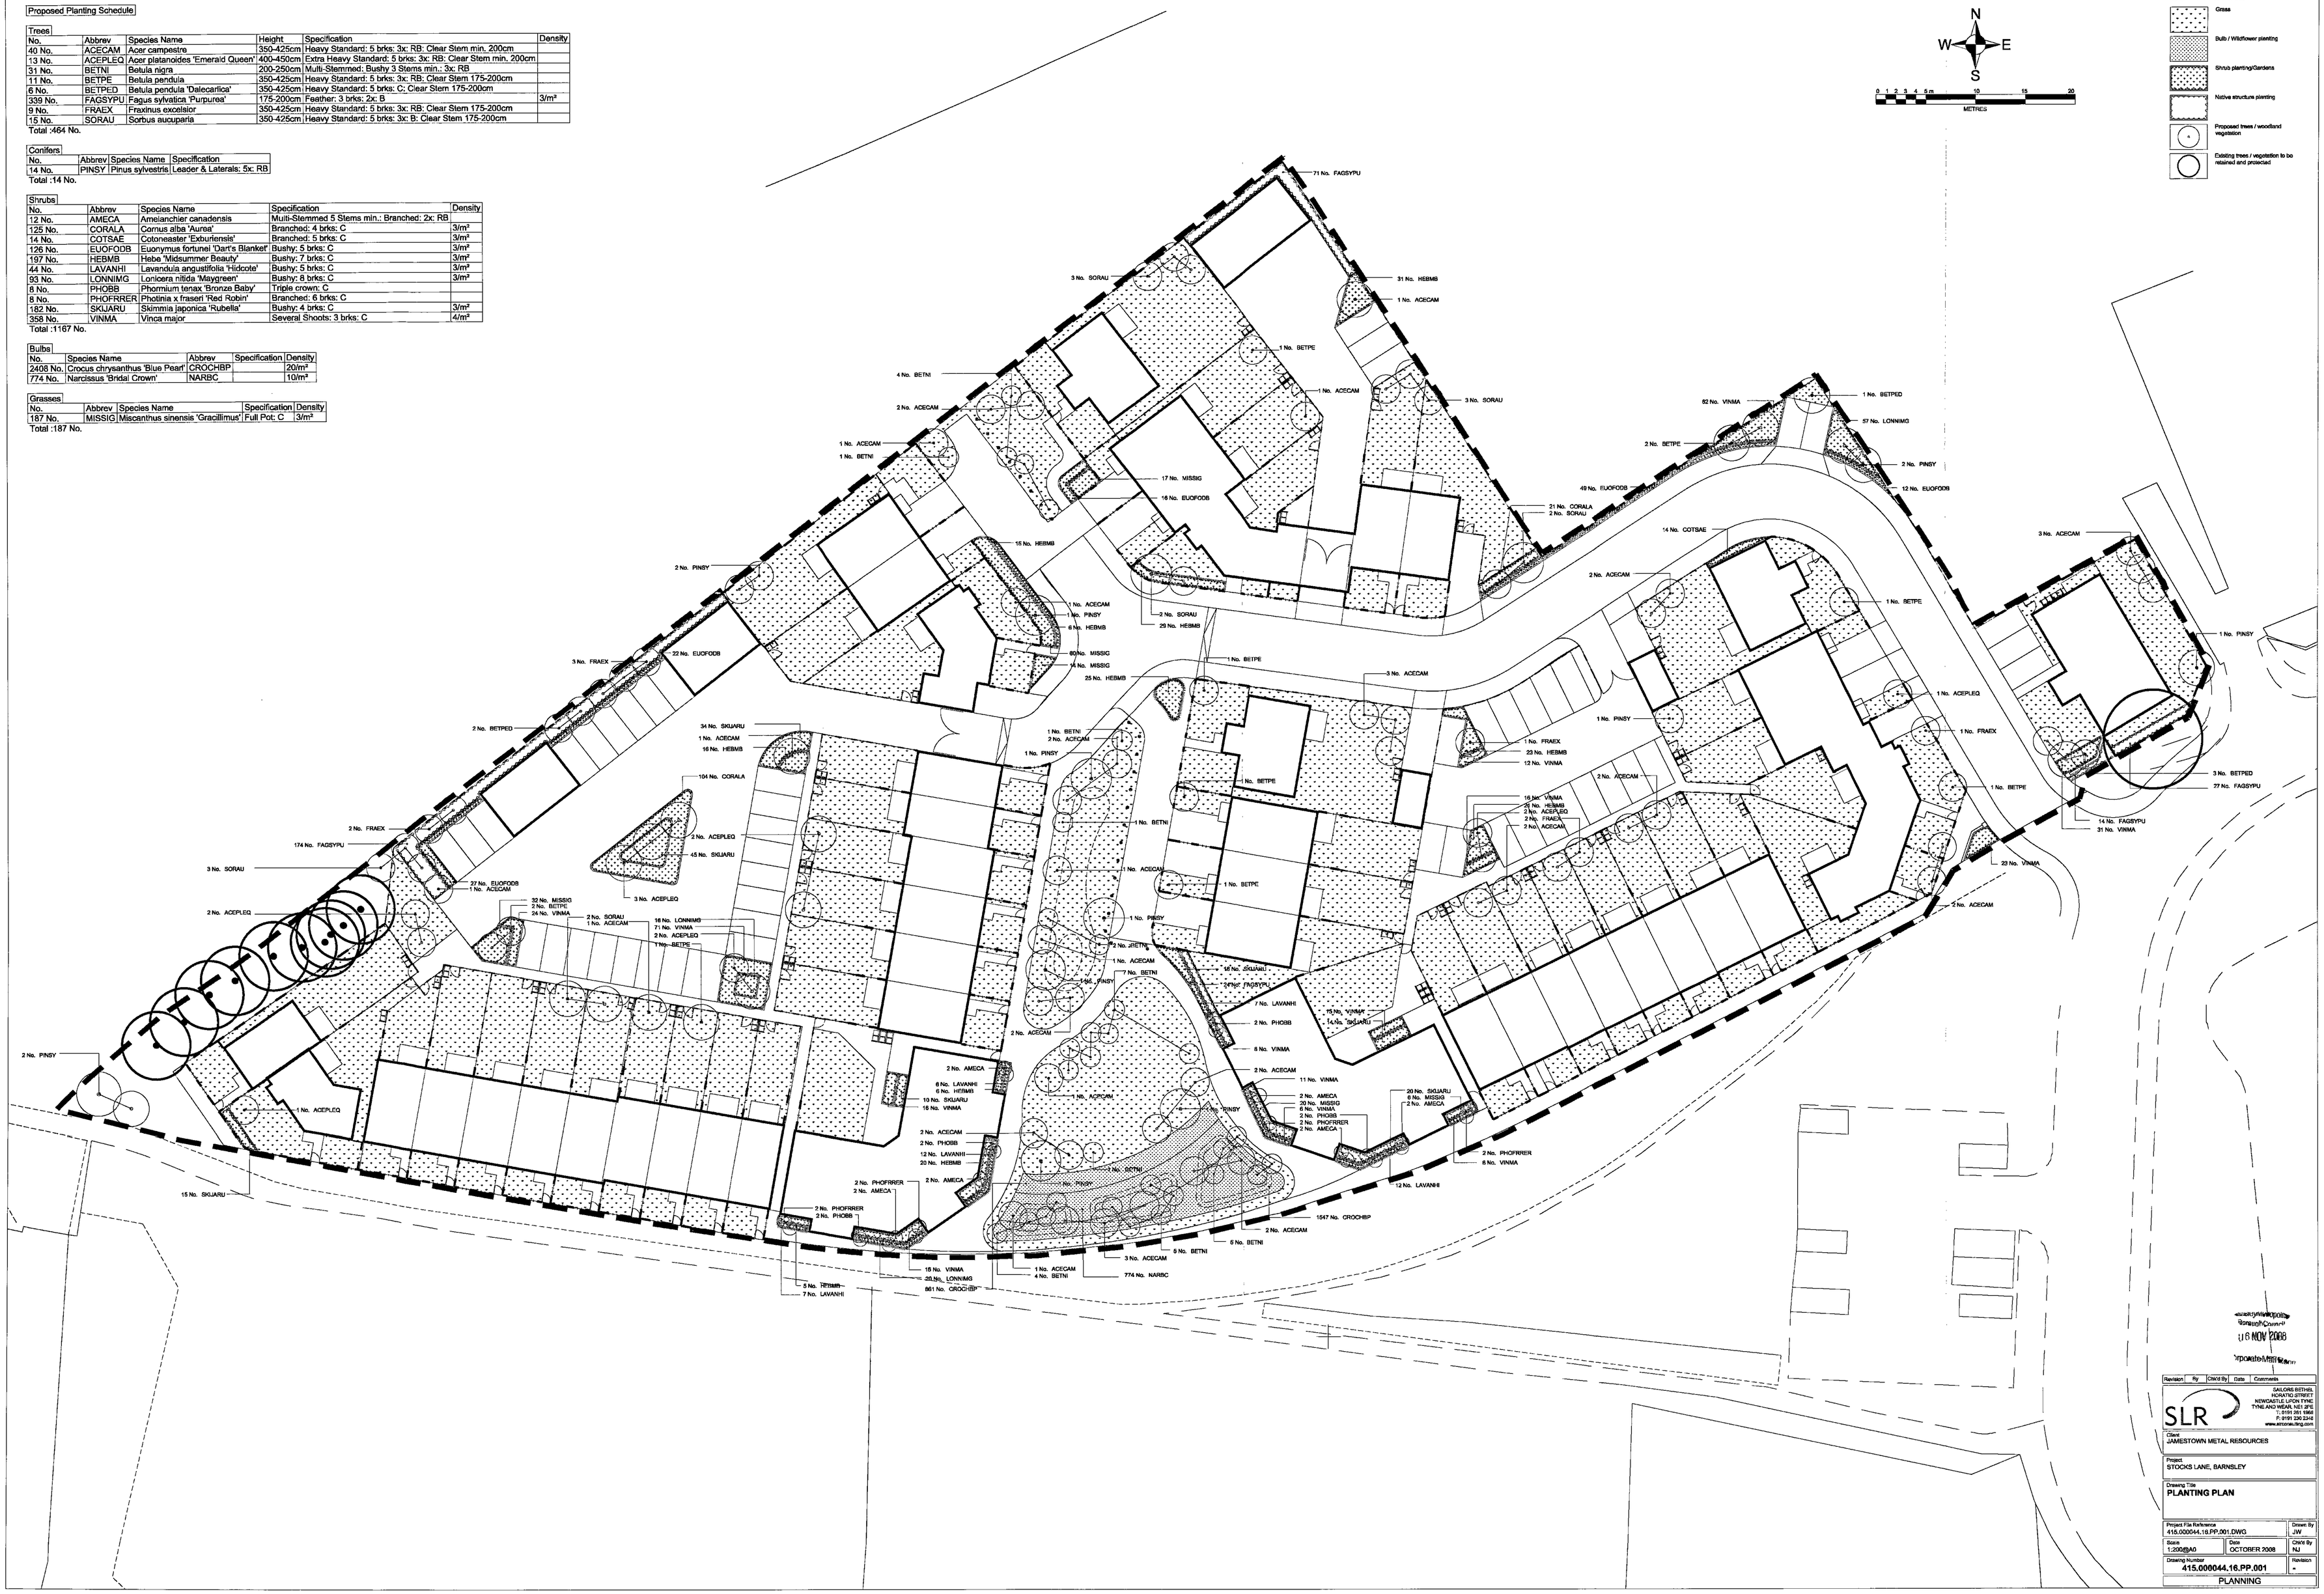

Barnsley Metropolitan Borough Council
16 NOV 2008
Development Control

Revision	By	Chk'd By	Date	Comments

SLR
SAILORS BETHEL
HORATIO STREET
NEWCASTLE UPON TYNE
TYNE AND WEAR NE1 4PE
T: 0191 261 1966
F: 0191 230 2348
www.slrconsulting.com

Client
JAMESTOWN METAL RESOURCES

Project
STOCKS LANE, BARNSLEY

Drawing Title
PLANTING PLAN

Project File Reference	Drawn By
415.000044.16.PP.001.DWG	JW
Scale: 1:200@A0	Date: OCTOBER 2008 — Chk'd By: NJ
Drawing Number: 415.000044.16.PP.001	Revision: -

PLANNING