

BS 5837:2012 - Tree Category


A = Category A trees - High quality and value 40+ years ULE

B = Category B trees - Moderate quality and value 20+ years ULE

C = Category C trees - Low quality and value 10+ years ULE

U = Category U trees - Very low quality and value <10 years ULE - Note no Cat U trees on site

Tree Protection Fencing to BS 5387:2012

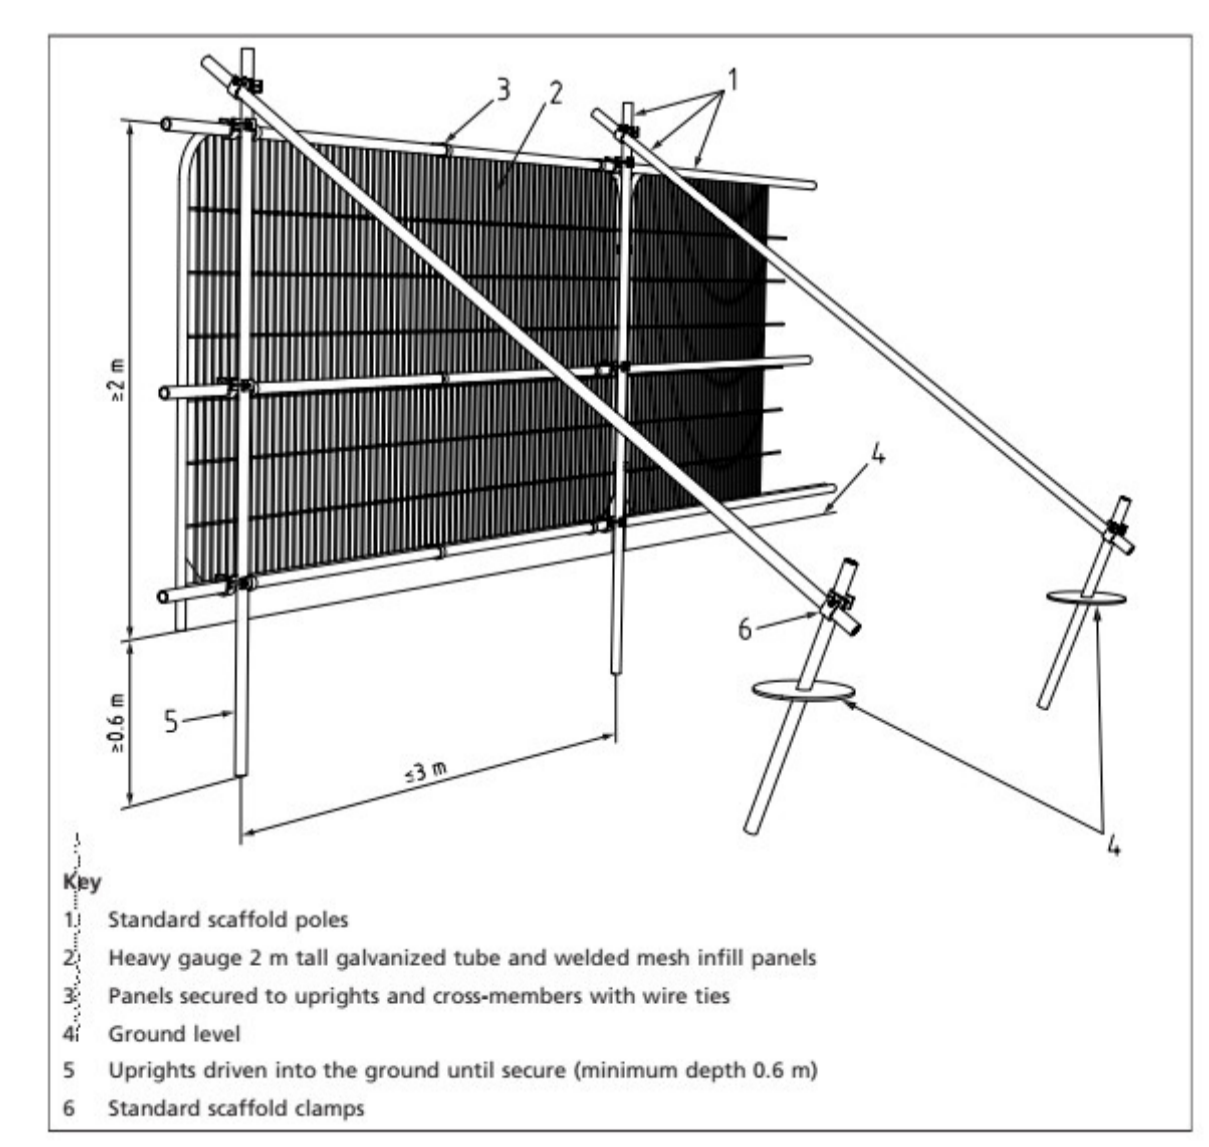

Tree No	Species	H&T (m)	Stem Diameter (mm)	BR Spread (m)	CAT to BS 5837:2012	RPA (m)	Comments
T0	Hedera Helix Arborescens Ivy	5	280	N = 2.5 / E = 2.9 / S = 3 / W = 1.8	C1	3.2m	Retained
T1	Acer pseudoplatanus Sycamore	13	930	N = 4.5 / E = 7.5 / S = 7 / W = 7.5	B1	11.16m	Retained
T2	Picea abies Norway Spruce	11	120	N = 5 / E = 5 / S = 3 / W = 4	B1	1.44m	Retained
T3	Sambucus nigra Elder	12	Triple Stem = 220	N = 7.5 / E = 6.5 / S = 7 / W = 5.5	C1	2.64m	Retained
T4	Acer pseudoplatanus Sycamore	7	70	N = 4 / E = 2 / S = 3 / W = 1	C1	0.84m	Retained
T5	Malus x domestica Apple	6	Multi Stem @ 1500 = 860	N = 5 / E = 3 / S = 2 / W = 2.5	C1	10.32m	Retained
T6	Sambuca nigra Elder	5	Multi Stem @ 1500 = 125	N = 2 / E = 3 / S = 2.5 / W = 3	C1	1.5m	Retained

Tree Protection Notes

- All tree protective fencing to be installed prior to installation of foundations.
- No trees are required to be removed as all root protection areas and canopy areas are outside the development and trafficked areas as indicated on plan.
- Please see Construction Method Statement for site storage areas and delivery routes.
- Existing 2.1 metre steel fencing erected to the South and West site boundary. Site Boundary line indicated in red.

This plan has been developed in consultation with:

Michael Cooper M.ARB.
Dip. P.R.A
Agricultural Consultant

Details

Print @ A1
Site Plan: 1 / 200
Issue No: 2 -
Re Drawn : October 2022

CMR Planning and Building Regulations Consultants

Mark Colin Russell Bsc (Hons) CM, MCIQB (No: 1494482)
Email: MarcusTandy12345@gmail.com

Client

Graham Asquith
Cemetery Road
Bolton Upon Dearne

Project

New Build Detached Bungalow and Garage