

PROPOSED TWO STOREY EXTENSION TO 2 HAWTHORNE CRESCENT DODWORTH FOR MR. & MRS. A. CUTLER - TEL. 281974




EX. REAR ELEVATION (1:100)

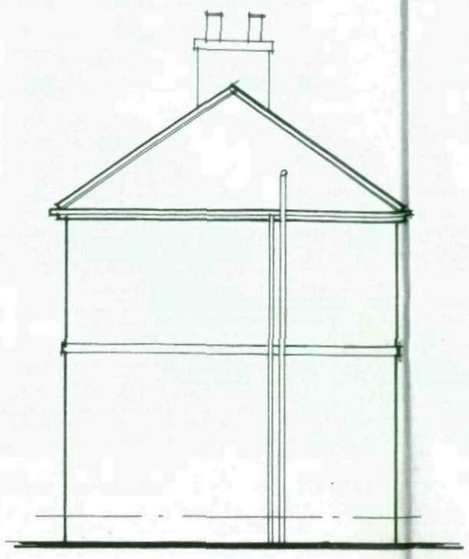


EX SIDE ELEVATION (1:100)

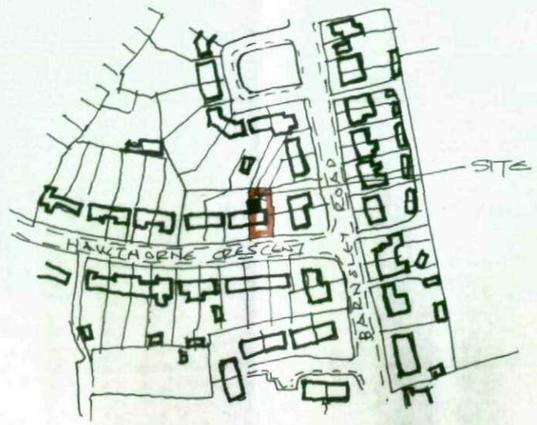

LOCATION PLAN 1/2500 approx

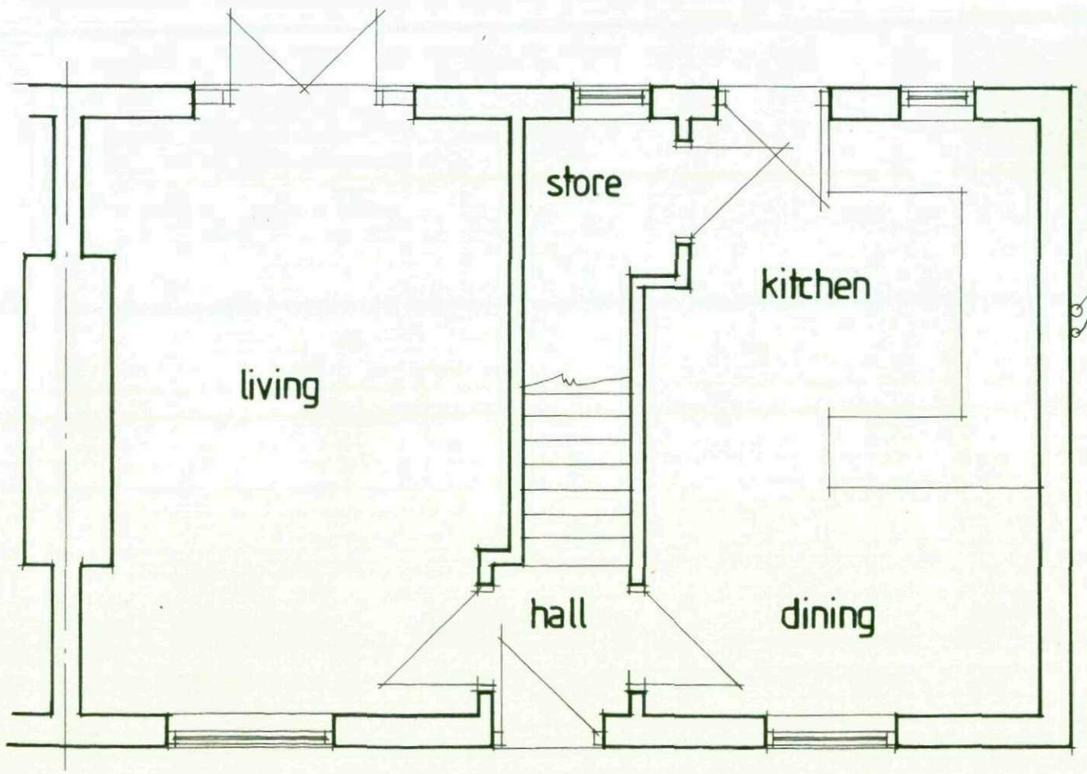

EX. G.F. PLAN (1:50)

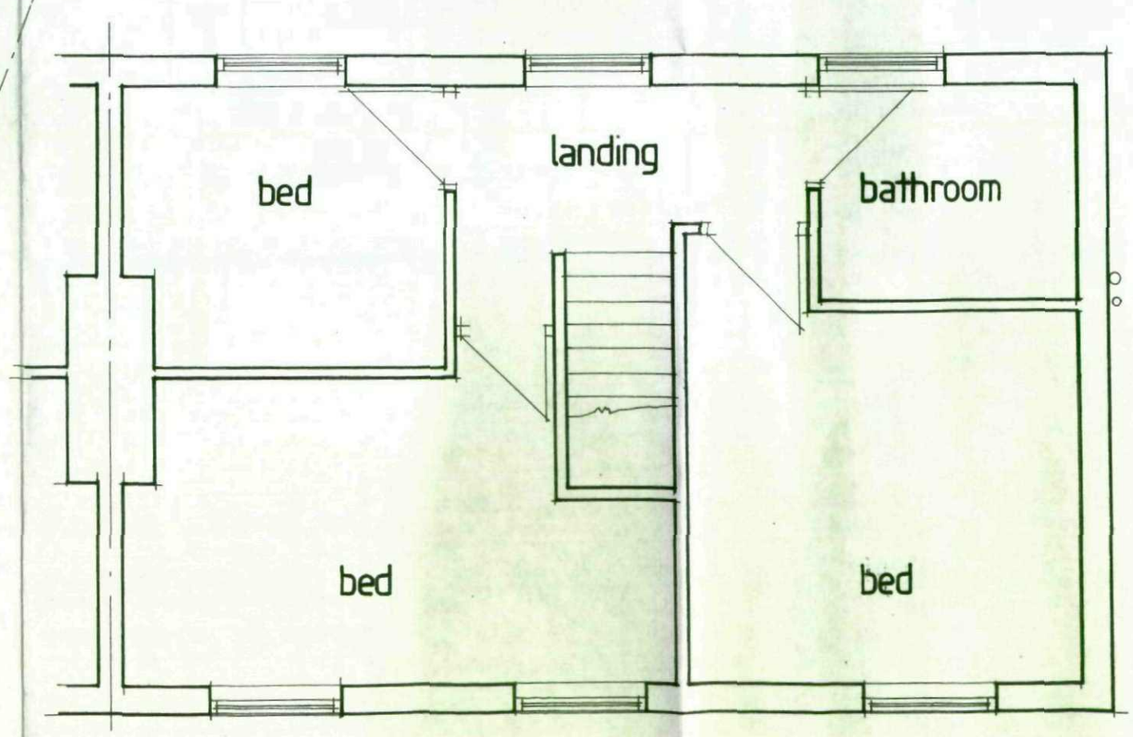

EX. F.F. PLAN (1:50)

GENERAL CONSTRUCTION NOTES
2 HAWTHORNE CRESCENT DODWORTH

General notes are to be read in conjunction with drawings and are applicable unless otherwise stated on drawings.

Foundations:- to be C35 grade concrete strip footings generally at a min depth of 525 mm to topside below ground level (900mm in clay). 600 wide by 225 thick for external cavity walls and 450 x 225 thick under 100 mm wide internal block work partition walls. Insert a layer of B503 mesh reinforcement in bottom.

Walls:- external walls to be cavity construction comprising of an outer leaf of facing material as indicated on drawing, with a 100 mm cavity to be filled with 100 mm Crown Dritherm with 100 mm thick Plasmor Stranlite inner leaf with 12.5mm plasterboard on plaster dabs with plaster skim finish to achieve U value 0.30W/msq.K. Below ground level use solid Stranlite or other approved 7N/ mm strength blocks to BS 5628. Provide cavity fill to within 75 mm of ground level. Close cavity at eaves. Bond external brickwork to existing every alternate course or use stainless steel wall connector/tie system. Provide and insert stainless steel vertical twist wall ties at a rate of 5.per sq metre ie at 750 centres horizontally, 450 centres vertically, and 225 centres up reveals of openings. Insert 215 x 65 mm airbricks at 1 m ctrs to vent under ground floor joists. Sleeve across cavity to internal wall. Provide tray dpcs over airbricks and lintels. Provide continuous horizontal dpcs to both leaves immediately above airbricks. Insert Damcor insulated cavity closers/dpc's to all, sills and reveals of openings in external walls as required. Wall plates to be 100 x 75 timbers restrained by 30 x 5 mm galvanised mild steel anchor straps 1200 centres built into blockwork, 900 mm min drop. Internal walls to be 100 mm thick blockwork plastered both sides or 75 x 50 softwood studding at 600 centres with noggins at 400 centres and all board edges with min. 25mm mineral fibre sound insulation in voids. Line both sides with 12.7 mm plasterboard and skim finish. (See hatching for identification on drawing).

Floors Generally:- to be 22 mm T & G flooring grade chipboard (water resistant grade 3 type to bathrooms toilets and kitchens) with glued joints and perimeter sealed with mastic, on SC 4 grade joists (sizes and centres as indicated on drawing for first floor). Ground floor to be 100 x 50 SC4 grade joists at 400 ctrs on dpc on honeycomb brickwork sleeper walls on 100 mm thick C35 grade concrete (thickened up to 150 mm under sleeper walls) on 2000g-visqueen dpm/radon barrier on 150 min well compacted hardcore. Insulate between ground floor joists with 110mm Kingspan k3 insulation supported on netting to achieve U value 0.22W/msq.K. Provide 100mm mineral fibre insulation between first floor joists.

Pitched roofs:- roofing material as specified on drawing on 38 x 25 sw battens on one layer untearable roofing breather felt on prefabricated trussed rafters to BS 5268 part 3 1973 using processed timbers to BS 4471 1978 and BS 4978 1973. Calculations for trusses are to be submitted 28 days prior to erection for which conditional approval is requested. Provide and install a proprietary PVC eaves ventilation strip to full extent of eaves, duct over insulation to vent roof space. Provide and install 100 mm thick Crown Loft Roll 40 insulation between ceiling joist members with 200 mm Crown Wool insulation over joists to achieve 0.16W/msq/K. Ceilings to be 12.7 mm thick plasterboard and skim finish.

Provide and install 30 x 5 mm galvanised mild steel anchor straps at 1200 centres to first floor joists, where joists run parallel to walls. Straps are to extend over 3 no joists and be spiked to each one. Nog out between members directly beneath straps in 75 x 50 timbers.

Windows and ventilation:- all new windows are to have opening lights of not less than 1/20th of the floor area and glazed panels not more than 25% of the floor area. New windows to all habitable rooms to be fitted with trickle ventilators giving not less than 8000 mm^2 area. All new windows and glazed doors are to have double glazed units manufactured to BS 6206 using 6mm laminated glass outer leaf 16mm air gap and 6mm inner leaf of laminated Pilkingtons soft coated low E glass, and are to be fully draft stripped.

Provide and install mechanical extract fans with 100 mm ducts to external air. Fans are to be capable of extracting 15 litres/sec for toilet/bathrooms.

Windows to habitable first floor rooms to have min 750 high x 450 wide clear opening lights, for escape purposes.

Plumbing and drainage:- soil and vent pipes to be 100 mm ∅ pvc and to terminate one metre above any opening light and be fitted with a balloon grating. Waste to baths, showers, and sink units to be 40 mm ∅ pvc and 32 mm ∅ pvc to washbasin all are to be fitted with 75 mm deep seal traps. Connections to soil stack are to be min 200 mm above or below wc connections.

Drainage is to be 100 mm ∅ vitrified pipe work with flexible joints and 150 mm bed and surround or pea gravel. Back fill trench in concrete where drains are within one metre of building to level of foundation. Drains passing through walls are to be allowed free movement and brickwork arched or lintelled over, and where drains are lower than normal foundations the foundations are to be taken down either side of drain and lintelled over to receive brickwork.

Manholes are to be 225 mm thick class B engineering brick walls with 150 mm thick C 35 grade concrete base. Haunching to pipes to be waterproof concrete. Covers to be galvanised steel set in C 35 grade concrete 100 mm thick.


Gutters to be 100 mm pvc half round or square section with 64 mm round or square section fall pipes to suit.

Mechanical/Electrical Works:- the electrical installer should be registered under the competent persons scheme and upon completion issue a self-certificated certificate of compliance with Building Regs. to the local authority. All heating installations/alterations to be carried out by Corgi registered operatives.



PROP. REAR ELEVATION (1:100)

PROP. SIDE ELEVATION (1:100)

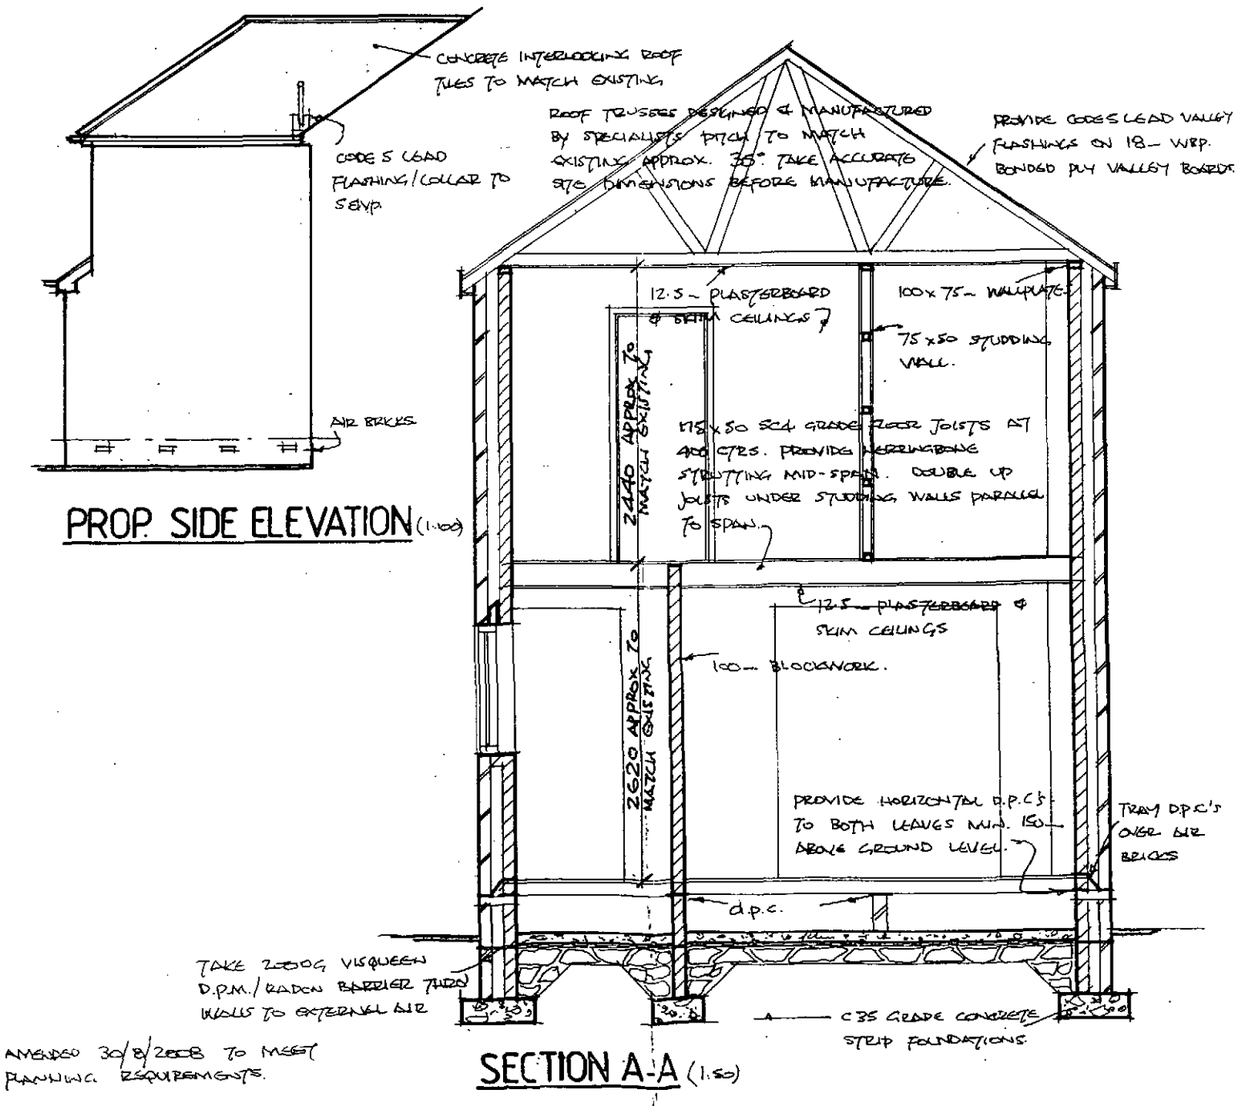

PROP. SIDE ELEVATION (1:100)

SECTION A-A (1:50)

AMENDED 30/8/2008 TO MEET PLANNING REQUIREMENTS.

777.5 | 2260 | 665 | 685 | 777.5

NEW RWP

B B

CATNIC CG 90/100 LINTOL OVER

2 No CATNIC CN 99/438C HEAVY DUTY LINTELS OVER 100 m BLOCKWORK WALLS.

A

150 THICK INNER LEAF AT GROUND FLOOR LEVEL.

NEW S&VP BOXED IN & INSULATED WITH MINERAL WOOL INSULATION.

REMOVE EXISTING WINDOW & PART KNOCK OUT WALL & INSERT 2 No NAYLORS RG R.C. LINTOLS OVER & MAKE GOOD.

PROVIDE DOOR & FRAME & MAKE GOOD TO FINISHES.

sitting

living

toilet

NAYLORS RG R.C. LINTOL OVER

1500

porch

CATNIC CG 90/100 LINTEL OVER

2465

1472.5

A

FORM NEW M.H.

NEW S&VP.

NEW EXTRACT FAN.

EX. M.H.

REMOVE EXISTING WINDOW & BRICK UP OPENING & MAKE GOOD TO FINISHES

REMOVE EXISTING NON-LOADBEARING STUDDING WALL & MAKE GOOD.

EXTEND KITCHEN UNITS

kitchen

dining

EX S&VP.

EX RWP.

PROP G.F. PLAN (1:50)

1902.5 | 1810 | 1452.5

NEW RWP

CATNIC CG 90/100 LINTEL OVER.

75 x 50 STUDDING WALLS

1600

bed

en-suite

1800

NEW EXTRACT FAN WITH ROOF OUTLET

NEW S&VP.

NEW CEILING MOUNTED EXTRACT FAN WITH ROOF OUTLET

REMOVE WINDOW & PART BRICK UP OPENING & MAKE GOOD

bathroom

FORM NEW BATHROOM & RECONNECT ALL SERVICES & WASTES

FORM NEW STORAGE CUPD

landing

REMOVE EXISTING WINDOW & PART BRICK UP OPENING & INSERT NEW DOOR & FRAME & MAKE GOOD

bed

2300

100

KNOCK OUT EXISTING LIGHTWEIGHT TIMBER PARTITION WALL & CONSTRUCT NEW 75 x 50 STUDDING WALL & MAKE GOOD TO FINISHES.

bed

bed

3487.5

NEW S&VP.

NEW RWP

PROP F.F. PLAN (1:50)

TRAY D.P.C. OVER CODS & LEAD UPSTAND FLASHING MIN 150 UPSTAND.

STRAP HANGERS

2 No CATNIC CN 99/438C LINTELS

100 x 50 C 24 GRADE RAFTERS & CEILING TIES AT 400 CTRS.

SECTION B-B (1:50)

STRIP OUT REDUNDANT BATHROOM FIXTURES & FITTINGS & SEAL OFF ALL WASTES & SERVICES & MAKE GOOD TO FINISHES

AMENDED 30/8/2008 TO MEET PLANNING REQUIREMENTS