



PROPOSED WEST ELEVATION
1:100



PROPOSED SOUTH ELEVATION
1:100

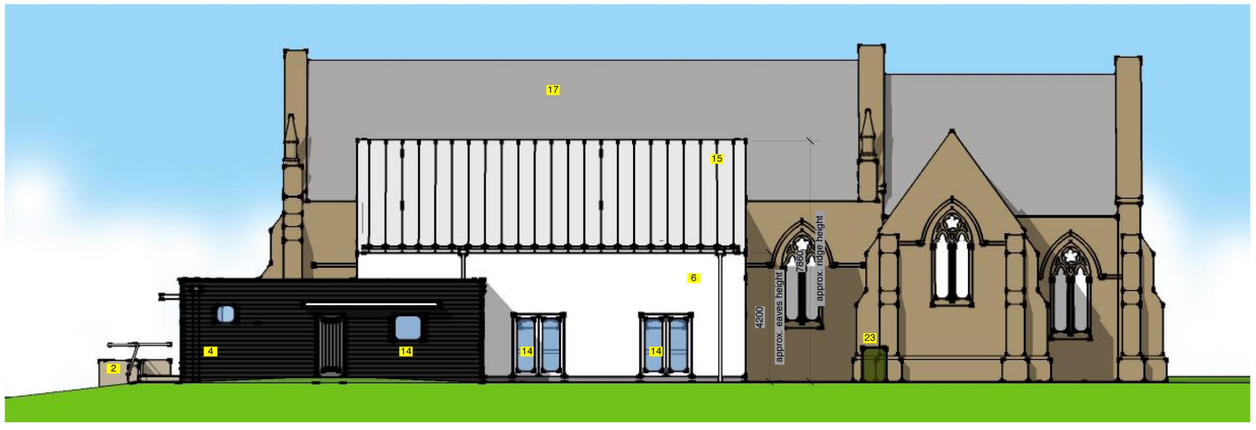

PROPOSED WEST ELEVATION
1:100

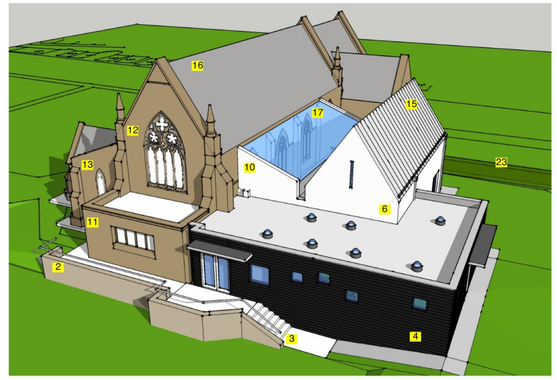


PROPOSED SOUTH-WEST VIEW



PROPOSED NORTH-WEST VIEW



PROPOSED SECTION THROUGH THE COMMUNITY HALL

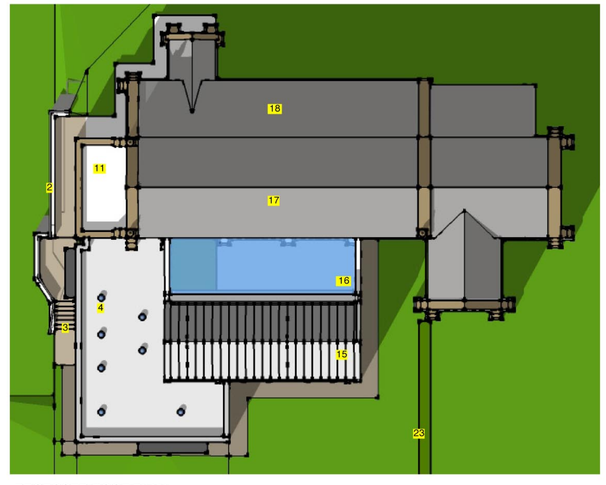

PROPOSED ROOF PLAN
1:200

1 Existing footpath which provides access to the service entrance of the existing extension is retained and utilised as a secondary access to the Community Hall

2 New retaining wall with handrail forms the level access route (shown hatched) to the separate Main Entrance of the Community Hall. The feasibility of re-using the external blockwork from the demolition of the existing extension as the material finish to the retaining wall will be explored.

3 Stepped approach with a level landing at the bottom of the flight which joins up with the existing footpath.

4 Flat roofed structure accommodates the kitchen WCs & office, it is clad in a black/ dark stained timber boarding.
Flat roof has rooflights where additional natural light & ventilation is required.

5 Paved area to the perimeter of the building primarily for convenient maintenance access.

6 Pitched roof section of the Community Hall has a rendered finish, coloured white & a Terne coated stainless steel roof finish.

7 This area of the churchyard remains as grass and has convenient access from the Community Hall.

8 Site boundary, existing brick wall.

9 Ashfield House.

10 The 'lean-to' section of roof above the Community Hall has rendered gable ends and a glazed roof to allow maximum natural daylight into the Nave of the existing church.

11 Existing Sacristy with flat roof projects beyond the main West Gable.

12 Existing main West Gable.

13 Existing North Aisle.

14 The prominent door and window openings in the South elevation of the new construction relate to the position of the existing windows in the South elevation of the church.

15 Terne coated stainless steel roof finish with cast aluminum rainwater goods.

16 Glazed 'lean-to' above Community Hall allows natural daylight to enter the Nave.

17 Existing slate roof above Nave.

18 Existing slate roof above North Aisle.

19 New Community Hall

20 Existing Nave.

21 Walk-in gutter to enable cleaning & maintenance.

22 Existing main East Gable.

23 Existing hedge.

P1 - Issued to the LA for Pre-app. planning consultation. 04/06/10 JH
P2 - West elevation added. Issued for planning permission. 30/07/10 JH

ISSUES AND REVISIONS

WILES & MAGUIRE
The Danesmead Wing, 33 Fulford Cross, York Y010 4PB
tel.01904 655447 fax.01904 624570
officw@wamarchitects.co.uk www.wamarchitects.co.uk

PROPOSED EXTENTION TO ST JOHN THE BAPTIST, CUDWORTH

PROPOSED ELEVATIONS

Scale: 1:100 @ A1 - Date: Nov 09 - By: JH

CUD:02/301 REV: P2

• DO NOT SCALE FROM THIS DRAWING
• THE CONTRACTOR IS TO CHECK ALL DIMENSIONS ON SITE
• THIS DRAWING IS SUBJECT TO COPYRIGHT