
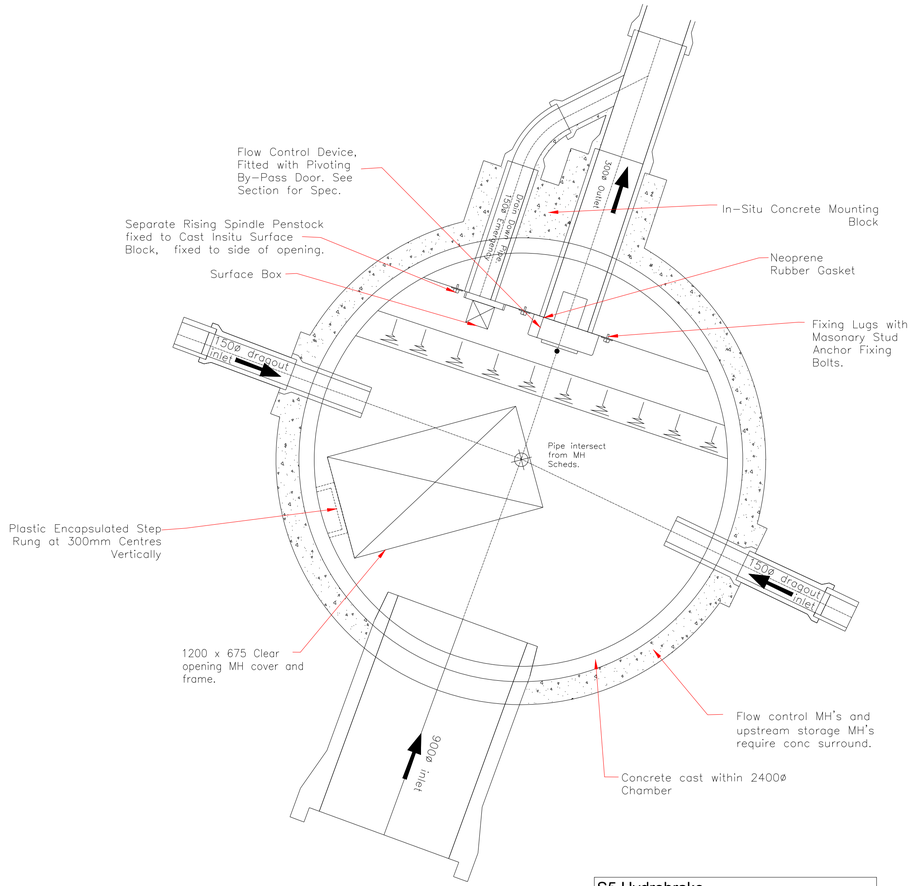


S5 Hydrobrake
CL:196.989
IL:195.175
Discharge:5l/s
Chamber:2.400m
Design Head: 1.5m
Reference:SHE-0100-5000-1400-5000

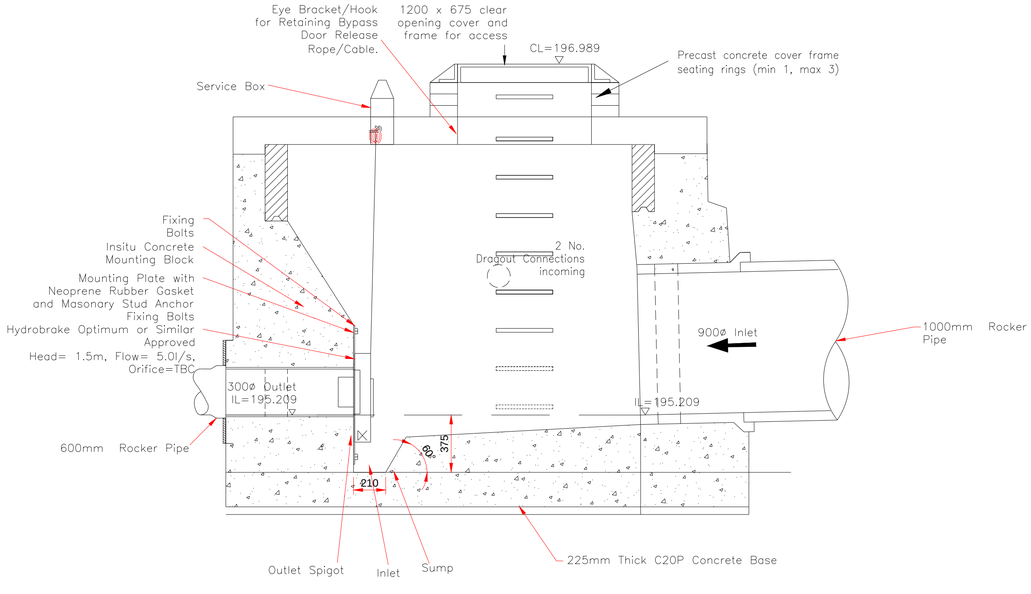

NOTES:

1. ALL ADOPTABLE DRAINAGE WORKS HAVE BEEN DESIGNED AND ARE TO BE CONSTRUCTED IN ACCORDANCE WITH "SEWERS FOR ADOPTION 6TH EDITION" AND UU SUPPLEMENT GUIDELINES AND STANDARD DETAILS

2. ALL CLAY PIPE WORK SHALL BE EXTRA STRENGTH CLAYWARE TO B.S EN 295:1991 PART 1

3. ALL PRECAST CONCRETE PIPEWORK SHALL BE TO THE CLASS STATED ON THE DRAWINGS IN ACCORDANCE WITH B.S EN 1916:2002. ALSO, ALL MANHOLES AND CHAMBERS SHALL BE TO B.S EN 1917:2002

4. THE CONTRACTOR MAY ELECT TO USE REINFORCED PVC PIPES AS COVERED BY B.S 4660:2000 & B.S EN 1401-1. STRUCTURED WALL UPVC PIPES TO COMPLY WITH WIS 4-35-01 UPTO AND INCLUDING 300MM. (BY PRIOR AGREEMENT WITH ADOPTING AUTHORITY) MAX. PIPE LENGTH TO BE 3.0M

5. ALL LEVELS RELATE TO TOPOGRAPHICAL SURVEY DATUM

6. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS

7. PLOT DRAINAGE CONNECTIONS TO SEWERS MUST BE 150MM DIAMETER AND UNLESS OTHERWISE STATED LAID TO THE INVERT SHOWN.

8. LEVELS GIVEN ON DRAGOUT CHAMBERS ARE INCOMING PIPE LEVELS

9. PLOT DRAINAGE RUNS TO BE KEPT WITHIN THE CURTILAGE OF THE PLOT THEY SERVE WHEREVER POSSIBLE.

10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT ANY EXISTING INVERT LEVELS AND EXISTING SITE LEVELS (EXISTING BOUNDARY LEVELS) INDICATED ON DRAWINGS ARE CORRECT BEFORE WORKS COMMENCE.

11. ALL CONNECTIONS TO ADOPTABLE SEWERS SHALL BE MANUFACTURED JUNCTION PIPES. SADDLE CONNECTIONS WILL NOT BE PERMITTED, UNLESS SPECIFIED.

12. ALL SEWERS FOR ADOPTION WITH GREATER THAN 1.20M COVER IN ROADS OR 0.9M COVER IN FIELDS SHALL HAVE CLASS S GRANULAR BED AND SURROUND.

13. ANY SEWER FOR ADOPTION WITH LESS THAN 1.2M COVER IN ROADS OR 0.9M COVER IN FIELDS SHALL HAVE A MINIMUM OF 150MM ST4 CONCRETE SURROUND. FLEXIBILITY SHALL BE MAINTAINED BY THE PROVISION OF FLEXCELL OR SIMILAR APPROVED JOINT FILLER BREAKS IN THE CONCRETE SURROUND AT EACH PIPE JOINT

14. IT IS THE RESPONSIBILITY FOR THE CONTRACTOR TO CHECK ALL ONSITE EXISTING GROUND LEVELS PRIOR TO COMMENCING AND IF THERE ARE ANY DISCREPANCIES THE CONTRACTOR MUST REPORT TO THE ENGINEER IMMEDIATELY

15. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY THE DRAINAGE AUTHORITY OF THE COMMENCEMENT OF ANY DRAINAGE WORKS AND TO COMPLETE ANY REQUIRED SEWER CONNECTION FORMS INCLUSIVE OF PAYING ANY REQUIRED FEES. THE CONTRACTOR MUST ALLOW FOR THE SUPERVISION OF THE SEWER CONSTRUCTION WORKS BY THE LOCAL AUTHORITY AND NOTIFY THE SUPERVISING OFFICER, GIVING NOTICE WHICH IN ACCORDANCE WORTH THE L.A REQUIREMENTS.

16. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO APPLY FOR ANY REQUIRED ROAD OPENING PERMITS WITH THE LOCAL AUTHORITY INCLUDING THE PAYMENT OF ANY FEES

17. BEFORE COMMENCING ANY WORKS ON SITE, THE CONTRACTOR MUST CONTACT THE RELEVANT STATUTORY UNDERTAKER AND BE IN POSSESSION OF THE LATEST AVAILABLE DRAWINGS FROM THE STATUTORY UNDERTAKERS WHICH SHOWS DETAILS OF THEIR SERVICES/APPARATUS.
THE CONTRACTOR MUST CONFIRM EXACT LOCATION AND DEPTH OF ANY SERVICES/APPARATUS BY THE USE OF ELECTRO-LOCATION OR SIMILAR DEVICES AND BY HAND DUG TRIAL HOLES.
MECHANICAL EXCAVATOR, POWER TOOLS ETC. MUST NOT BE USED TO LOCATE EXISTING SERVICES/APPARATUS.

Rev:	Description:	Date:	By:	Chkd:

Status: APPROVAL

Client: CONROY BROOK

Project: CROSS LANE HOYLANDSWAINE

Drg Title: S5 HYDROBRAKE DETAIL

ELLUC Projects
ELLUC PROJECTS
760 MANDARIN COURT
CENTRE PARK
WARRINGTON
CHESHIRE
WA1 1GG
t: (01925) 24 3333
info@ellucprojects.co.uk
www.ellucprojects.co.uk

Scale:	Size:	First Issue:	Drawn:	Checked:
1:20	A1	JUNE 16	EP	JR

Drg No: ELL-525-CB-W-360 Rev: /

© This drawing is the copyright of Elluc Projects Ltd