






01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

# BOL300 Midi Bollard

Straight to mains, IP65, 500lm bollard

## Features

IK rating	IK08
IP rating	IP65
CSP Switchable	Fixed colour
LED Lifetime	30,000h L70
CRI	80 Ra
SDCM	4 SDCM

## Installation information

UK Bathroom Zone	2
Inrush Current	20A
Construction Material	Aluminium / PVC
Weight	2.9Kg
Maximum Ambient Temperature	40°C
Electric Class (1, 2, 3)	1

## Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
BOL300X30	Black RAL9011	23W	3000K	360°	500	22	144

## Wiring information

Cable Required for Connector	3x 1.0mm <sup>2</sup>
Type of Wiring Required	Parallel

## LED driver

N/A (Integrated SLEV driver)	220-240V	Yes	No	-	N/A	N/A
------------------------------	----------	-----	----	---	-----	-----

## Accessories

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
-----	------------------------------------------------------------	-----------------


## Guarantee

5 year extended warranty

## Features & benefits

- 23W
- IP65 ideal for car parks and walk ways
- Black powder coated finish
- Straight to mains screw terminals
- Domed top for a low glare finish, and a minimum up spill of light making it comfortable on the eye
- Benefiting from light all round with a 360° beam angle
- IK08 rated

## Beam angle: 360°

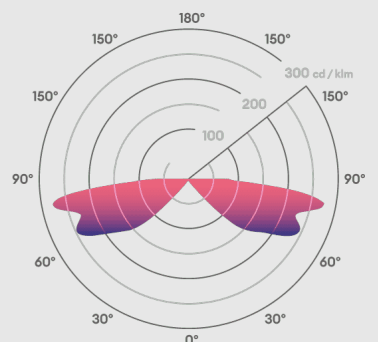

Ø150mm

