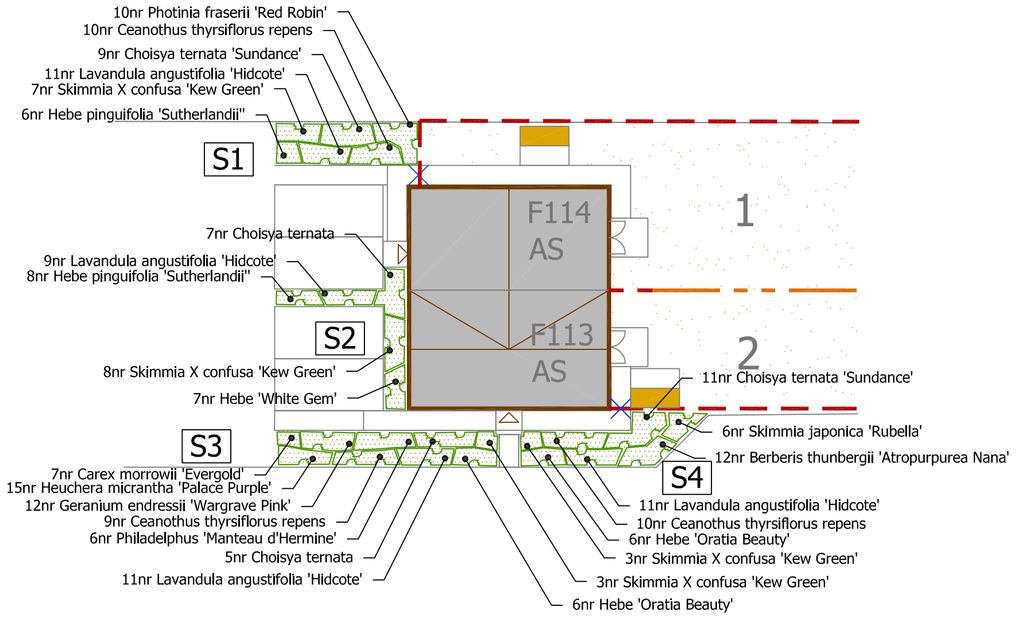
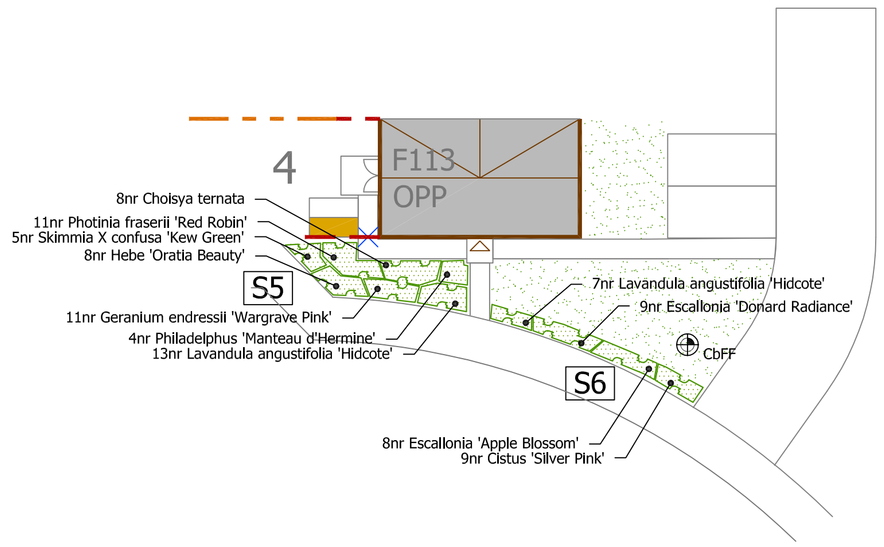
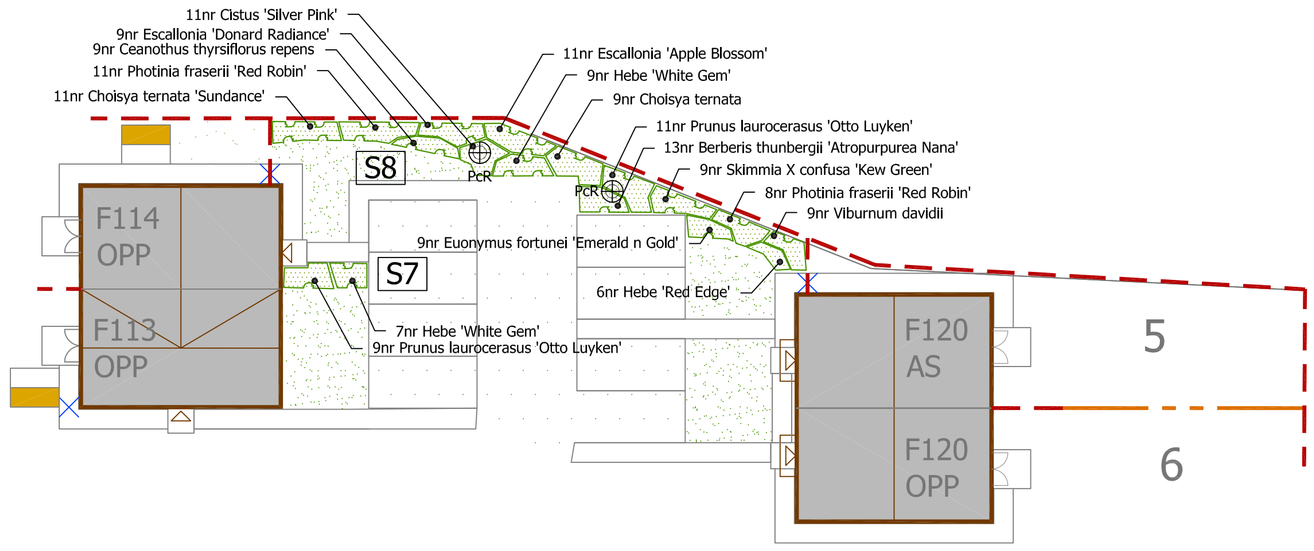
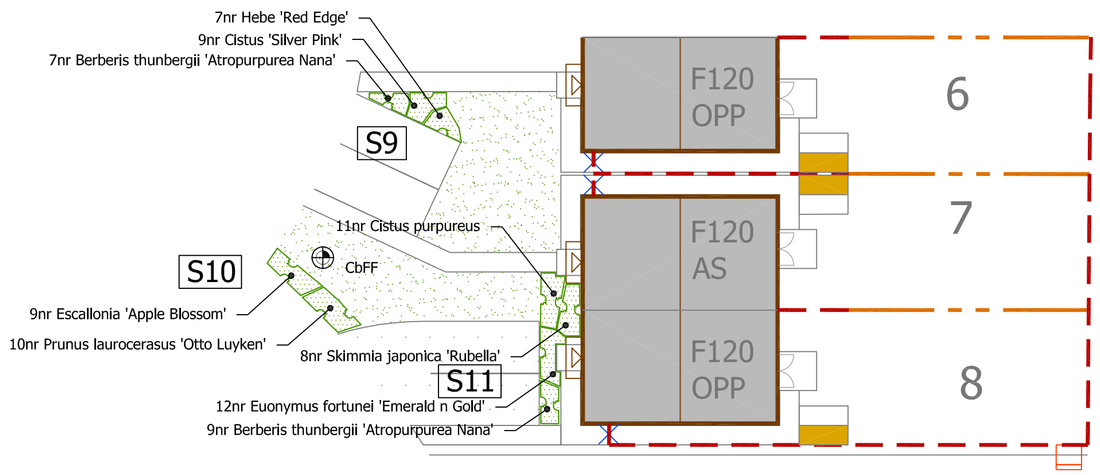
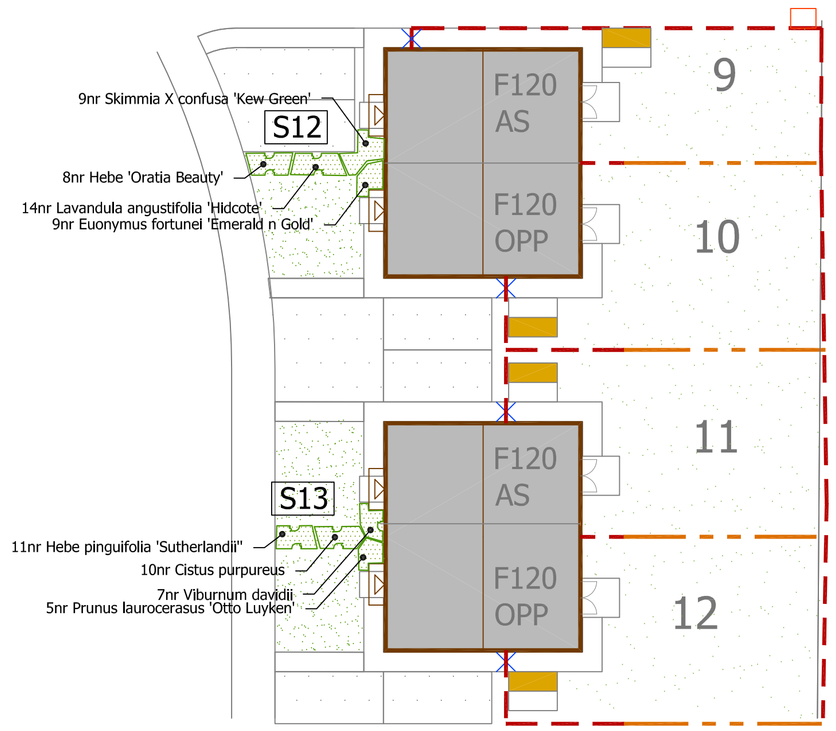
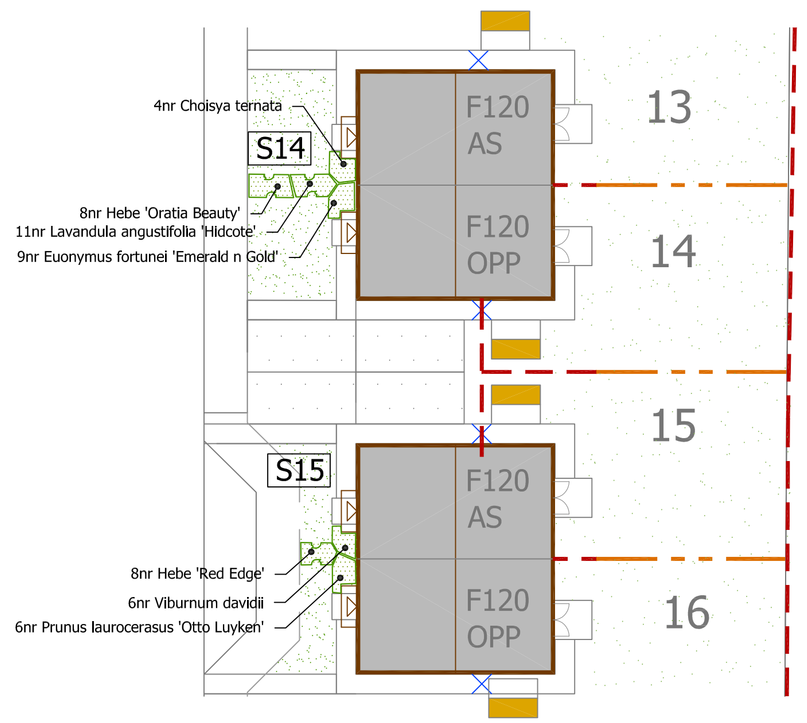



## PLANTING SCHEDULES

| ORNAMENTAL PLANTING SCHEDULE | | | | |
|---|---|---|---|---|
| Herbaceous | | | | |
| Nr | Name | Ht in cm | Pot(L) | Density |
| 54 | Carex morrowii 'Evergold' | | 3L | 12.00 |
| 34 | Geranium endressii 'Wargrave Pink' | | 3L | 6.00 |
| 36 | Heuchera micrantha 'Palace Purple' | | 3L | 9.00 |
| Shrub | | | | |
| Nr | Name | Ht in cm | Pot(L) | Density |
| 46 | Berberis thunbergii 'Atropurpurea Nana' | 25-30cm | 3L | 6.00 |
| 57 | Ceanothus thyrsiflorus repens | 30-40cm | 3L | 5.00 |
| 79 | Choisya ternata | 30-40cm | 3L | 3.00 |
| 64 | Choisya ternata 'Sundance' | 30-40cm | 3L | 4.00 |
| 29 | Cistus purpureus | 30-40cm | 3L | 5.00 |
| 38 | Cistus 'Silver Pink' | 30-40cm | 3L | 5.00 |
| 79 | Escallonia 'Apple Blossom' | 50-60cm | 3L | 4.00 |
| 54 | Escallonia 'Donard Radiance' | 50-60cm | 3L | 4.00 |
| 44 | Euonymus fortunei 'Emerald Gaiety' | 20-30cm(D) | 3L | 6.00 |
| 75 | Euonymus fortunei 'Emerald n Gold' | 20-30cm(D) | 3L | 6.00 |
| 71 | Hebe 'Oratia Beauty' | 30-40cm | 3L | 4.00 |
| 63 | Hebe pinguifolia 'Sutherlandii' | 25-30cm | 3L | 6.00 |
| 44 | Hebe 'Red Edge' | 25-30cm | 3L | 5.00 |
| 51 | Hebe 'White Gem' | 30-40cm | 3L | 4.00 |
| 193 | Lavandula angustifolia 'Hidcote' | 25-30cm | 3L | 6.00 |
| 43 | Philadelphus 'Manteau d'Hermine' | 30-40cm | 3L | 3.00 |
| 71 | Photinia fraserii 'Red Robin' | 30-40cm | 3L | 4.00 |
| 57 | Prunus laurocerasus 'Otto Luyken' | 50-60cm | 3L | 4.00 |
| 47 | Skimmia japonica 'Rubella' | 30-40cm | 3L | 4.00 |
| 78 | Skimmia X confusa 'Kew Green' | 30-40cm | 3L | 4.00 |
| 33 | Viburnum davidii | 25-30cm | 3L | 5.00 |

All shrub material shall be first quality, sturdy, well rooted non-refridgerated stock with well branched heads and fibrous root systems. Shrubs shall be planted into 450mm good quality fibrous topsoil incorporating organic compost and slow release fertiliser in accordance with all good horticultural practice.
All plant material shall be a minimum of 3L pot size unless otherwise specified and conform to BS3936 Part 1 and BS 4428. Finished beds shall be lightly forked over and dressed with 50mm coarse forest bark mulch.

## TREE SCHEDULE

| SPECIES | Ht in m / Girth in cm | NUMBERS REQUIRED 3.5-4.25 / 12-14 | 4.25 min / 14-16 |
|---|---|---|---|
| Betula utilis var Jaquemontii (BuJ) | | 3 | - |
| Carpinus betulus 'Frans Fontaine' (CbFF) | | - | 6 |
| Pyrus calleryana 'Chanticleer' (PcC) | | 2 | - |
| Pyrus calleryana 'Redspire' (PcR) | | 2 | - |
| Tilia cordata 'Greenspire' (TcGS) | | - | 6 |

All trees to have clear stems to 1.8m above ground level and 2.0m above ground level for extra heavy standard and semi mature trees with well developed branching heads with a single, central leader and healthy, fibrous root systems.
Trees shall be planted into pits of an appropriate size to accommodate the root system without restriction, backfilled with a 3:1 topsoil:compost mix and shall be secured to a machine rounded stake using 1 no. tree tie with rubber spacer. Finished height of stake shall not exceed 1/3 height of staked tree above ground. Foundation design of new buildings shall accommodate proposed tree planting in accordance with NHBC guidelines.

## TURFING TO FRONTAGES

The topsoiled area to be turfed, is to be grade and cross-graded to even running falls, to allow the finished levels of the turf to be 40mm above the adjoining paved areas.
The surface should be lightly and uniformly firmed by rolling or treading and reduced to a fine tiilth up to 25mm in depth. All rubbish, stones greater than 50mm in diameter etc, shall be removed from the surface.

Apply an even application of approved fertiliser at a rate of 70g/m² and rake in. No turves shall be laid in exceptionally frosty weather or in other unsuitable weather conditions.
The turves shall be laid in a stretcher bond pattern, closely butted and firmed into position, to the correct levels. The turves should be laid off planks, working over turves previously laid. A dressing of fine, sifted topsoil (complying with BS 3882) should be applied to the laid turf and brushed well into the joints.

Turves shall be watered regularly to prevent them drying out before they establish.

## GRASS SEEDING TO REAR GARDENS

100mm depth of topsoil complying with BS3882 to be spread to area. Pre-seed fertiliser to be applied at 50gm/m². Soil to be cultivated using a rotovator, to 50mm depth then further cultivated and rolled to produce a firm seed bed.
Quality lawn grass seed mix such as Germinal Seeds A2-Quality Lawn mix to be sown at 50gm/m2 to rear gardens.

## LOW MAINTENANCE GRASS MIX

100mm depth of topsoil complying with BS3882 to be spread to area.
Pre-seed fertiliser to be applied at 50gm/m². Soil to be cultivated using a disc harrow or rotovator, to 50mm depth then further cultivated and rolled to produce a firm seed bed.
Low maintenance grass seed mix such as Germinal Seeds A22 mix to be sown at

35gm/m2 to the areas of POS and to the verge at the entrance of the site.


Sue Farmer BA MALD MLI
Landscape Architect

fdalandscape

Westleigh Hall
Wakefield Road
Denby Dale
Huddersfield HD8 8QJ
telephone 01484 861611
fax 01484 861616
isdn 01484 866900
email info@fdalandscape.co.uk
www.fdalandscape.co.uk


client: Partner Construction Ltd.

project: Residential Development
NANNY MARR ROAD, DARFIELD
PHASE 2

drawing title: LANDSCAPE DETAIL SHRUB BEDS S1 - S15

| scale | date | drwn by | drawing no |
|---|---|---|---|
| 1:200 @A1 | Mar 19 | SEL | R/1822/5 |