
This drawing is the copyright of tpm landscape Ltd and cannot be reproduced in any form without the consent of the company. Written and scaled dimensions to be checked on site, any discrepencies reported prior to work commencing. IF IN DOUBT PLEASE ASK

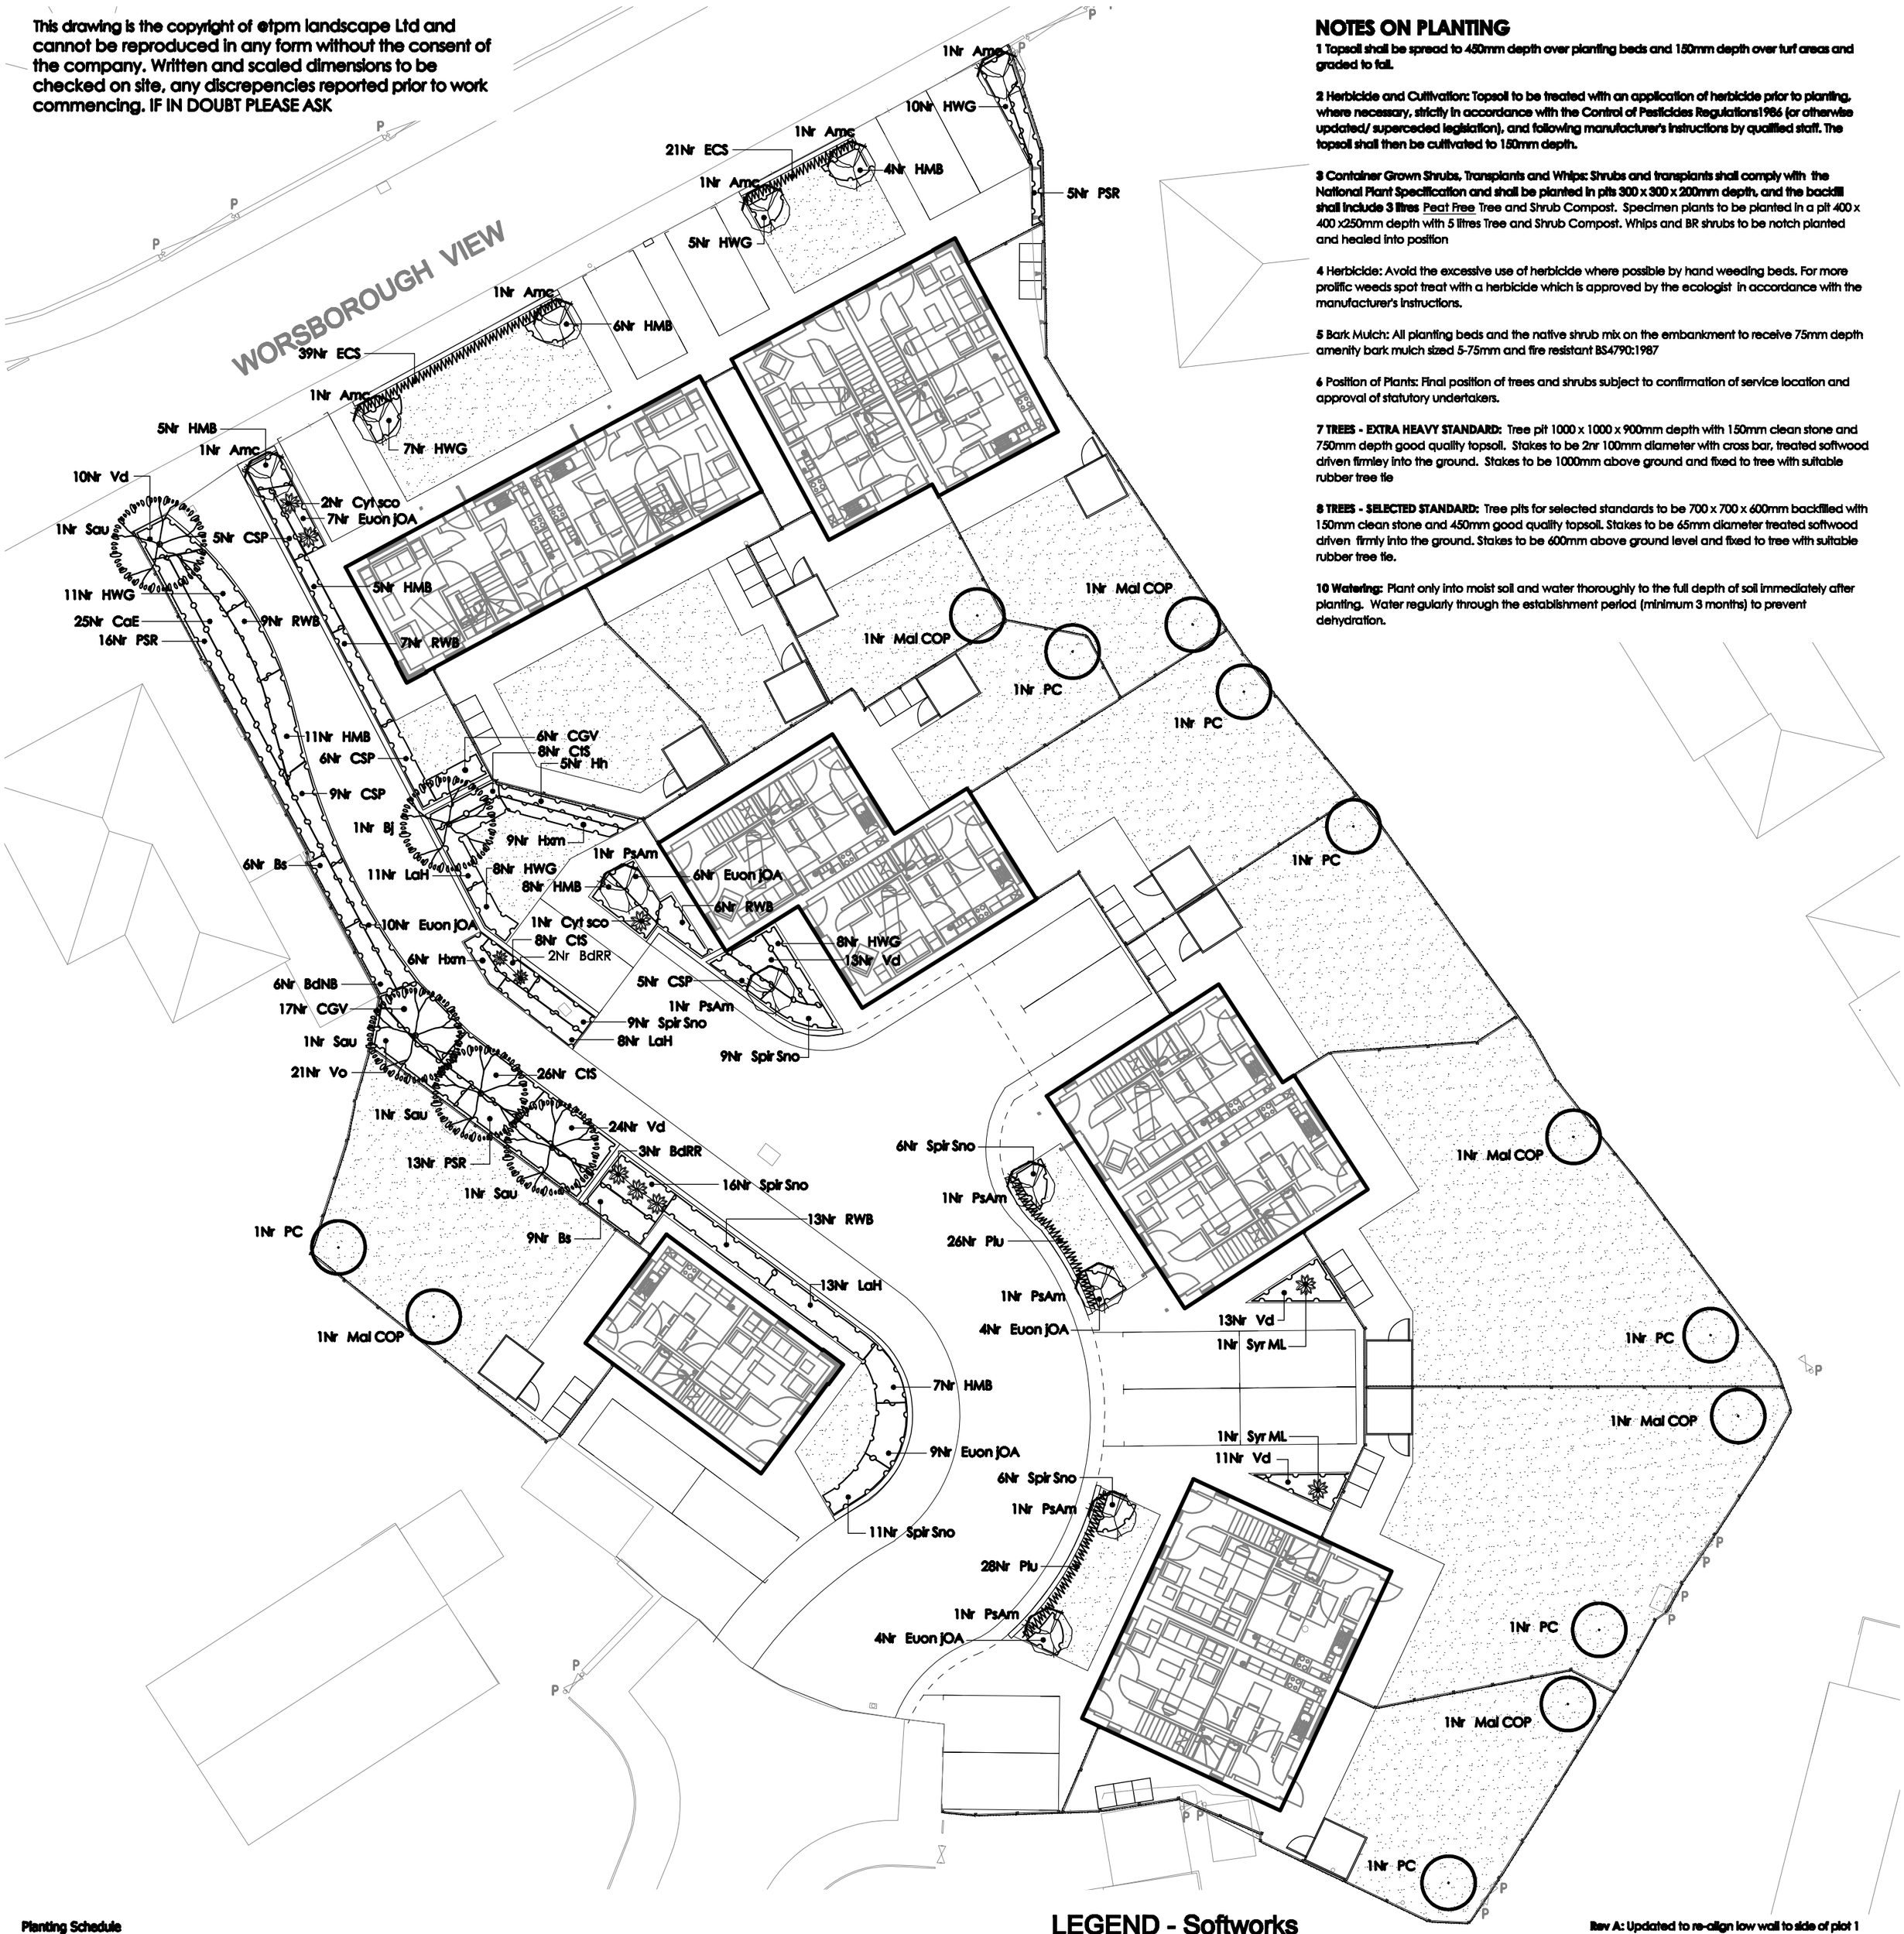


## NOTES ON PLANTING

**1** Topsoil shall be spread to 450mm depth over planting beds and 150mm depth over turf areas and graded to fall.

**2** Herbicide and Cultivation: Topsoil to be treated with an application of herbicide prior to planting, where necessary, strictly in accordance with the Control of Pesticides Regulations1986 (or otherwise updated/ superceded legislation), and following manufacturer's instructions by qualified staff. The topsoil shall then be cultivated to 150mm depth.

**3** Container Grown Shrubs, Transplants and Whips: Shrubs and transplants shall comply with the National Plant Specification and shall be planted in pits 300 x 300 x 200mm depth, and the backfill shall include 3 litres Peat Free Tree and Shrub Compost. Specimen plants to be planted in a pit 400 x 400 x250mm depth with 5 litres Tree and Shrub Compost. Whips and BR shrubs to be notch planted and healed into position

**4** Herbicide: Avoid the excessive use of herbicide where possible by hand weeding beds. For more prolific weeds spot treat with a herbicide which is approved by the ecologist in accordance with the manufacturer's instructions.

**5** Bark Mulch: All planting beds and the native shrub mix on the embankment to receive 75mm depth amenity bark mulch sized 5-75mm and fire resistant BS4790:1987

**6** Position of Plants: Final position of trees and shrubs subject to confirmation of service location and approval of statutory undertakers.

**7 TREES - EXTRA HEAVY STANDARD:** Tree pit 1000 x 1000 x 900mm depth with 150mm clean stone and 750mm depth good quality topsoil. Stakes to be 2nr 100mm diameter with cross bar, treated softwood driven firmley into the ground. Stakes to be 1000mm above ground and fixed to tree with suitable rubber tree tie

**8 TREES - SELECTED STANDARD:** Tree pits for selected standards to be 700 x 700 x 600mm backfilled with 150mm clean stone and 450mm good quality topsoil. Stakes to be 65mm diameter treated softwood driven firmly into the ground. Stakes to be 600mm above ground level and fixed to tree with suitable rubber tree tie.

**10 Watering:** Plant only into moist soil and water thoroughly to the full depth of soil immediately after planting. Water regularly through the establishment period (minimum 3 months) to prevent dehydration.

Planting Schedule

| Class | Nr | Code | Plant Name | Height/Spread/Grade | Girth | Age | Root | Container | Form | Density | Density Type |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Climber | 5 | Hh | Hedera helix | 40-60 | | | C | 3L | | 2.00 | /m2 |

| Class | Nr | Code | Plant Name | Height/Spread/Grade | Girth | Age | Root | Container | Form | Density | Density Type |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Shrub | 15 | Bs | Berberis x stenophylla | 40-60 | | | C | 3L | | 3.00 | /m2 |
| Shrub | 6 | BdNB | Buddleia davidii 'Nano Blue' | 60-80 | | | C | 3L | | 3.00 | /m2 |
| Shrub | 5 | BdRR | Buddleia davidii 'Royal Red' | 80-100cm | | | C | 20-30L | | | |
| Shrub | 23 | CGV | Ceanothus 'Gloire de Versailles' | 40-60 | | | C | 3L | | 3.00 | /m2 |
| Shrub | 42 | CtS | Choisya ternata 'Sundance' | 30-40 | | | C | 3L | | 4.00 | /m2 |
| Shrub | 25 | CSP | Cistus 'Silver Pink' | 30-40cm | | | C | 3L | | 3.00 | /m2 |
| Shrub | 25 | CaE | Cornus alba 'Elegantissima' | 50-80 | | | C | 3L | | 3.00 | /m2 |
| Shrub | 3 | Cyt sco | Cytisus scoparius | 40-80cm | | | C | 15L | | | |
| Shrub | 60 | ECS | Escallonia 'Crimson Spire' | 100-125 | | | C | | | 4.00 | /m |
| Shrub | 40 | Euon jOA | Euonymus japonicus 'Ovatus Aureus' | 40-60cm | | | C | 3L | | 3.00 | /m2 |
| Shrub | 46 | HMB | Hebe 'Midsummer Beauty' | 30-40cm | | | C | 3L | | 3.00 | /m2 |
| Shrub | 49 | HWG | Hebe White Gem | 20-30 | | | C | 3L | | 4.00 | /m2 |
| Shrub | 15 | Hxm | Hypericum x moserianum | 30-40 | | | C | 3L | | 4.00 | /m2 |
| Shrub | 32 | LaH | Lavendula angustifolia 'Hidcote' | 30-40 | | | C | 3-4L | | 3.00 | /m2 |
| Shrub | 54 | Plu | Prunus lusitanica | 80-100 | | | RB | | | 4.00 | /m |
| Shrub | 34 | PSR | Pyracantha 'Saphyr Red' | 60-80 | | | C | 3L | | 2.00 | /m2 |
| Shrub | 35 | RWB | Rosa 'White Bells' | 60-80 | | | C | 3L | | 3.00 | /m2 |
| Shrub | 57 | Spir Sno | Spiraea nipponica 'Snowmound' | 40-60cm | | | C | 3L | | 4.00 | /m2 |
| Shrub | 2 | Syr ML | Syringa vulgaris 'Madame Lemoine' | 100-125cm | | | B | 20-30L | | | |
| Shrub | 71 | Vd | Viburnum davidii | 20-30 | | | C | 3L | | 4.00 | /m2 |
| Shrub | 21 | Vo | Viburnum opulus | 40-60cm | | | C | 3L | | 4.00 | /m2 |

| Class | Nr | Code | Plant Name | Height/Spread/Grade | Girth | Age | Root | Container | Form | Density | Density Type |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Tree | 6 | Amc | Amelanchier canadensis | 200-250 | 10-12 | | RB | | Standard (Selected) | | |
| Tree | 1 | Bj | Betula jacquemontii | 425-600 | 14-16 | | RB | | Standard (Extra heavy) | | |
| Tree | 6 | Mal COP | Malus 'Cox's Orange Pippin' | 175-200cm | 10-12cm | | BR | | | | |
| Tree | 6 | PsAm | Prunus serrulata 'Amanogawa' | 250-300cm | 10-12cm | | RB | | Standard (Selected) | | |
| Tree | 7 | PC | Pyrus Conference | 175-200cm | 10-12cm | | B | | Standard (Selected) | | |
| Tree | 4 | Sau | Sorbus aucuparia | 425-600cm | 14-16cm | 3x | RB | | Standard (Extra heavy) | | |

## LEGEND - Softworks

**Proposed Native trees**
Trees set in soft landscaping to be planted as 14-16cm girth Extra Heavy Standards with double timber stake support, species to be locally native and/ or wildlife beneficial

**Proposed small tree/ large shrub**
10-12cm girth or 35L containerised stock to be planted within soft landscaped areas

**Proposed Fruit Tree**
10-12cm girth or 35L containerised stock to be planted within back gardens, species to be either locally native and/ or wildlife beneficial

**Proposed Specimens**
To be planted as 10-15L specimens, species to be locally native and/ or wildlife beneficial

**Proposed ornamental shrub planting**
To be planted as 3L pots at 3-5 plants per sq.m, shrubs to be either locally native and/ or wildlife beneficial

**Proposed hedge**
To be planted at 4 per lin.m, species to be wildlife beneficial

**Proposed grass**
To be laid as a general amenity turf (drought tolerant grass species) in the front and back gardens

Rev A: Updated to re-align low wall to side of plot 1 DC02-10-12

**tpm** landscape
chartered landscape architects

4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk

Client
Bowker Sadler

Project
Worsborough View, Pilley

Description
Planting Proposals

Status
For Approval

| Scale@A2 | Drawn | Date |
|---|---|---|
| 1:200 | DC | Oct 12 |
| Job number | Drawing number | Revision |
| 1612 | 02 | A |

Copyright tpm landscape Ltd