




S:\4035 Vistry Partnership\49 Shaw Lane, Carlton\WP\CAO and Design\3D Model\Plots\148-Plots 1, 24, 47, 139, 171_ (954_Detached) (Handed).vt
18/08/2026 16:36:26

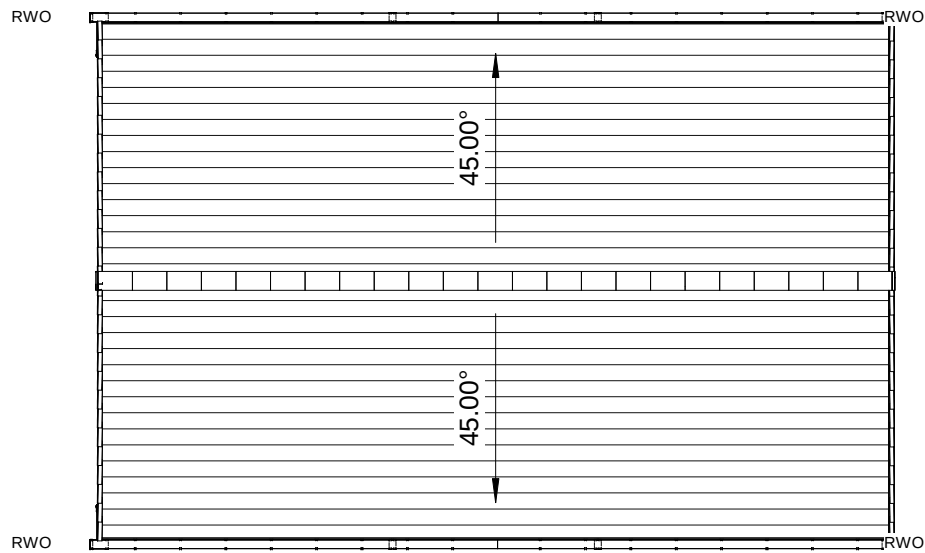

Roof Plan
1 : 100

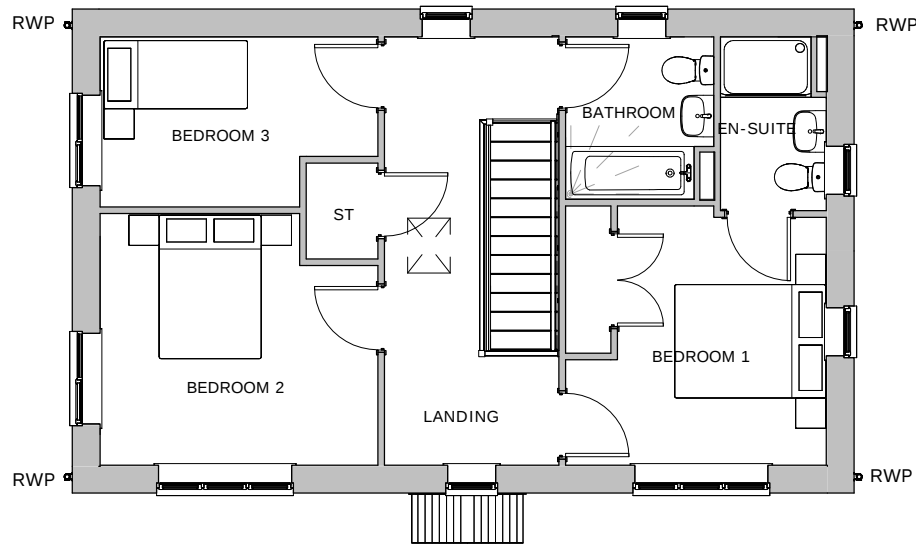


First Floor
1 : 100

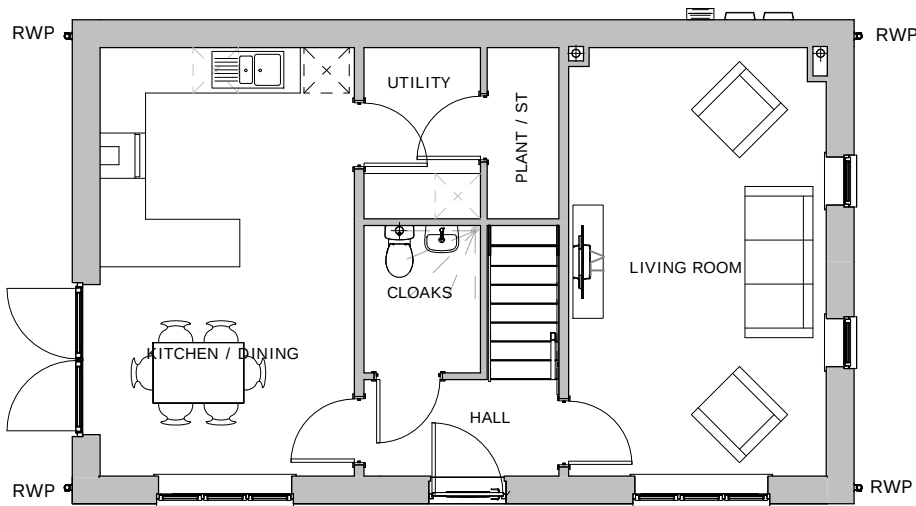

Ground Floor
1 : 100



Front Elevation
1 : 100

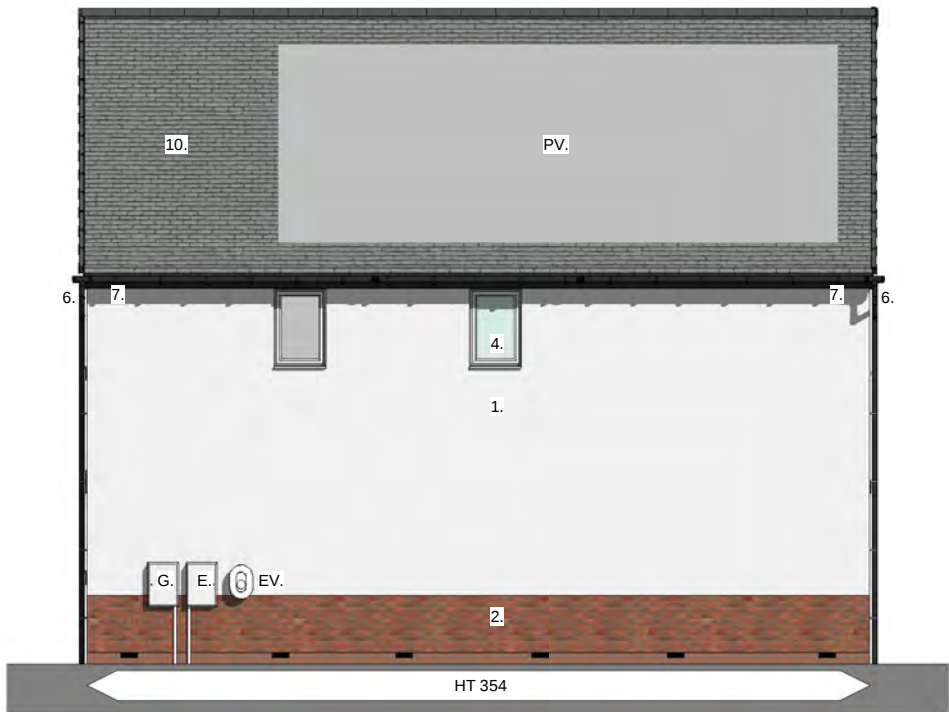

Side Elevation
1 : 100



Rear Elevation
1 : 100



Side Elevation
1 : 100

Plots
1, 24, 47, 139, 171
HT 354 - M4(2) compliant

HT 354 Detached
(Handed)
Shaw Lane, Carlton

© Acanthus WSM Architects Ltd.

The general contractor is responsible for the verification all dimensions on site and the architect is to be informed of any discrepancy.

The status of information contained in a computer copy of this drawing shall be limited to that conveyed by the paper copy.

Design Criteria

Site to comply with the following design criteria subject to confirmation of the form of construction and assessment by an external accredited assessor.

Revisions:

Rev	Description	Date	Issued by
P1	Initial issue.	13.10.25	SP/NG
P2	Plot 24 added.	24.06.26	NG/DRP
P3	Amount of render increased.	11.08.26	NG/DRP

Material Schedule:

- External walls - Through coloured render colour - off white.
- Main Body facing brickwork colour -red multi.
- Soldier course feature brickwork detailing - dark red.
- White UPVC window/patio door frames.
- PAS24 external door - Red (white insides).
- Black UPVC half round / polypipe gutters & square profile down pipes.
- Dark Grey UPVC fascias.
- Boxed eaves detail.
- GRP door canopy design to be confirmed.
- Concrete interlocking roof tiles - dark grey.

Key:

- G. Gas Meter Box.
- E. Electric Meter Box.
- EV. Electric Vehicle Charging Point - Indicative position shown (subject to location on site plan. (DWG no. (4035-49-AWSM-XX-XX-DR-A-002).
- PV. Indicative PV zone. Position, amount and location to be determined on plot by plot basis. Subject to MEP design.
- Obscure Glazing.

Notes:
Ground levels are indicative, refer to engineers levels drawings.

Vistry Group

Scale	1 : 100 @A2
Date	Feb.2026
Drawn/Checked	SP /NG
4035.49-AWSM-XX-XX-DR-A-148	
Status	S3
Rev	P3

ACANTHUS
ARCHITECTS