

DRIVESETT® ARGENT®


Driveways

Drivesett Argent, Dark (DK), edged with Drivesett Argent, Light (LT) and Tegula Kerb, Pennant Grey (PG)
Installed by Aura Landscapes Ltd, Southampton

- Use Drivesett Argent to achieve a premium granite look at a more affordable price and with a lower carbon footprint
- Circles and mixed size packs make a bespoke, contemporary driveway easy to achieve
- Argent Walling and Drivesett Argent Edgings can complete that matching look
- Attractive as a contrast edging block with so many other driveway and paving products
- New Buff colour option brings a radiant aesthetic to the range
- New for 2016 Drivesett Argent Edgings available to coordinate, see page 179

CO₂ per m²

MID RANGE

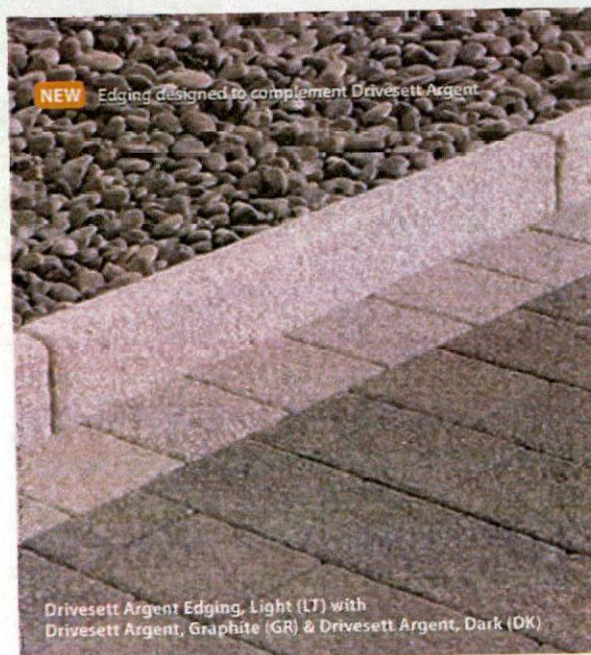

NEW Edging designed to complement Drivesett Argent

Drivesett Argent Edging, Light (LT) with
Drivesett Argent, Graphite (GR) & Drivesett Argent, Dark (DK)

An attractive, more affordable
alternative to granite setts



SCAN PAGE



Drivesett Argent,
Graphite (GR)



Drivesett Argent,
Light (LT)



Drivesett Argent,
Dark (DK)



Drivesett Argent,
Buff (S)

NEW

	Sizes mm (nominal)	No. item/pack	Weight (kg/pack)	Area (m ² /pack)	Colours	Order Select*	kg Qty per m ²
Mixed Size Pack	240 x 160 x 50	120		4.61	GR, DK, LT, S	✓	see website
	150 x 150 x 30	216		5.53			
	80 x 160 x 30	48		0.51			
Total/pack		384	1,202	10.75			

*Order Select supplied in 3 layer random pattern

CUTTING THE BLOCKS

When cutting the blocks as outlined in Marshall's Flexible Installation Guidelines (see page 184), it is important to make sure that once cut with water the block has been perfectly cleaned before installing.

Never cut with water whilst the block is in-situ, doing this will permanently stain the surface.

MARSHALLS DRIVEWAY SOLUTIONS

Everyday decisions such as creating vehicle parking areas on our properties can have environmental consequences.

	DRIVESYS® DRIVEWAYS	DRIVESETT® DRIVEWAYS	DRIVELINE® DRIVEWAYS
	Driveways which combine the most up to date textures and finishes with the latest innovation in driveway engineering. Every driveway features Drivesys patented technology to ensure straightforward and quick installation	With a wide choice of gauges, textures and colours there is a Marshall's Drivesett driveway for everyone. From traditional setts to more versatile sizes, Drivesett driveways are renowned for Marshall's lasting high quality. Drivesett Tegula is the most popular Drivesett driveway, it is the original and most popular 'aged look' block paving in the UK	Always a bold, single block size Driveline driveways can be used to create a statement whatever your budget Finishes range from premium aggregates to standard smooth look
SUB-BASE DESIGN	<p>30mm compacted Sharp River Sand</p> <p>Block Paving</p> <p>Appropriate Jointing Material</p> <p>Geo Textile Membrane if ground conditions dictate</p> <p>130mm MOT Type 1 Aggregate laid and compacted in two layers of 75mm</p>		
SUDS COMPLIANT	For the majority of the country if you direct rainwater to a flower bed or another area of the garden which has been designed to allow water to drain away, such as a soak away, your driveway will be compliant. If you do not make any provision for the rain water that falls on your driveway Planning Permission is likely to be required. In all cases it is best to check the rules in your local area		
SUDS PRODUCT AVAILABLE		<p>DRIVESETT ARGENT PRIORA Page 144-145</p> <p>DRIVESETT TEGULA PRIORA Page 150-151</p>	<p>DRIVELINE PRIORA Page 170-171</p>
SUGGESTED PRODUCTS	<p>DRIVESYS RIVEN STONE Page 138-139</p> <p>DRIVESYS SPLIT STONE Page 140-141</p> <p>DRIVESYS ORIGINAL COBBLE Page 142-143</p>	<p>DRIVESETT ARGENT Page 146-147</p> <p>DRIVESETT TEGULA ORIGINAL Page 154-157</p> <p>DRIVESETT NATRALE Page 162-163</p>	<p>DRIVELINE METRO Page 166-167</p> <p>DRIVELINE 50 Page 172-173</p>