


N O T E S

- INWL General Notes**
- All adoptable sewer works and material to be in accordance with INWL requirements.
 - Manhole covers shall/must have a clear opening of 600mm and shall be Class D400 to BS EN 124 with 150mm deep frames in highways.
 - Filled ground must be filled and consolidated under the supervision, and to the satisfaction, of INWL before any sewer works are carried out.
 - Cover slabs must carry the BSI Kitemark or will be rejected by the INWL inspector. Where the clear opening of the Kitemarked product is different to that of the cover and frame, a loading bearing slab should be filled above the cover slab to bring the size down to 600x600mm for the INWL specified cover size. Please refer to the Concrete Pipe Systems Association (CPSA), "Technical Bulletin" issued autumn 2004 for kitemarked cover slab opening sizes.
 - The adoptable sewers should be a minimum of 1m and manholes 0.5m from kerb faces and service margins.
 - Sewers must have 5 metres clearance from trees and hedges, (please also refer to Figure 2.3 on page 33 in "Sewers for Adoption" 6th Edition for restrictions on tree planting adjacent to Sewers).
 - Sewers to be laid in Class "S" bedding (150mm granular bed and surround). Where depth of cover to top of the sewer is less than 1.2m in highways and verges (or less than 900mm in none vehicular access areas) then a concrete slab should be provided above the granular bed and surround.
 - Adoptable plastic sewer pipes to be BSI Kitemarked (Certified to WIS 4-35-01 and BS/EN13476). Adoptable sewer pipes to be laid in maximum 3 metre lengths unless there is a specific operational need to lay longer.
 - Plastic channel sections in manholes are not acceptable and clayware is preferable. Plastic channels are difficult to set in concrete and a satisfactory finish cannot be obtained on the benching.
 - The chamber size of manholes with more than one connection in them may need to be increased an increment to accommodate the connections and bends.
 - INWL policy is not to accept Type "C" brick manhole and 1050mm dia manhole rings. Instead it is preferred that you use a type "B" manhole with 1200mm dia or 1500mm dia rings, with the opening sized over the channel where depth of cover to pipe soffit is 1-1.5m.
 - Surface water and foul rising mains to be provided with marker tape above the rising mains.
 - If plastic pipes are to be used then the following should apply:-
 - All adoptable sewers to be BSI Kitemark (certified to WIS 4-35-01).
 - Bedding and backfill material to conform to the requirements of Water Industry Specification 4-08-02 (Table 42).
 - Where plastic pipes are proposed for adoptable sewers, structural calculations for the plastic pipes and a site investigation report to prove that the ground condition is suitable for the plastic pipes are to be produced.
 - Where plastic pipes are installed into the ground prior to getting full technical approval, the developer must provide a CCTV survey of the prospectively adoptable sewers and a deformation test (Light-Line test) of the plastic pipes.
 - Demarcation chambers to be a min. 450mm dia chamber for 100mm dia foul & 150mm dia surface water pipes up to 1.2m deep. For depths greater than 1.2m, restricted access opening to 350mm is required for safety reasons.
 - Maximum depth of demarcation chamber to be 2m, where depth exceeds 2m, manhole to be constructed as type B manhole.
 - Where a B125 cover and frame has been approved, this must not be coated in plastic and must have lifting eyes suitably sized to accommodate standard lifting jacks. Screen down covers are not acceptable.
 - INWL is not obliged to accept filter drain/land drainage runoff into the public sewer network or adoptable drainage system (directly or in-directly). An alternative method of disposal of the land drainage runoff will therefore be required and you will have to liaise with the Land Drainage Authority/Land Drainage Section with regard to the disposal of the filter drain/land drainage runoff is required.
 - Sulphate resisting cement (C20-DCE2) and precast concrete products must be used or a laboratory report provided proving that such precautions are not necessary.
 - Strength of vitrified clay pipes (if used) to be 40kN/m for 1000, 40kN/m for 1500, 45kN/m for 2250 and 72kN/m for 3000. All concrete pipes to be Class 120 concrete to EN 1916/BS 5911-1:2002.
 - All levels of existing drainage to be confirmed prior to work commencing on site.
 - The contractor must allow for any fee's required for road and sewer opening permits, sewer connections and make the appropriate applications.
 - There should be enough clearance to accommodate the bedding for both pipes, approx 300mm; if crossover is near rocker then the clearance needed may be increased.
 - All plastic drainage to be installed under the highway to be HAPAS approved.
 - Pipe with less than 1.20m cover require concrete protection. Please refer to drawing 0425/87/04.02.

FOR CONTINUATION SEE DRAWING 0425/87/06.03

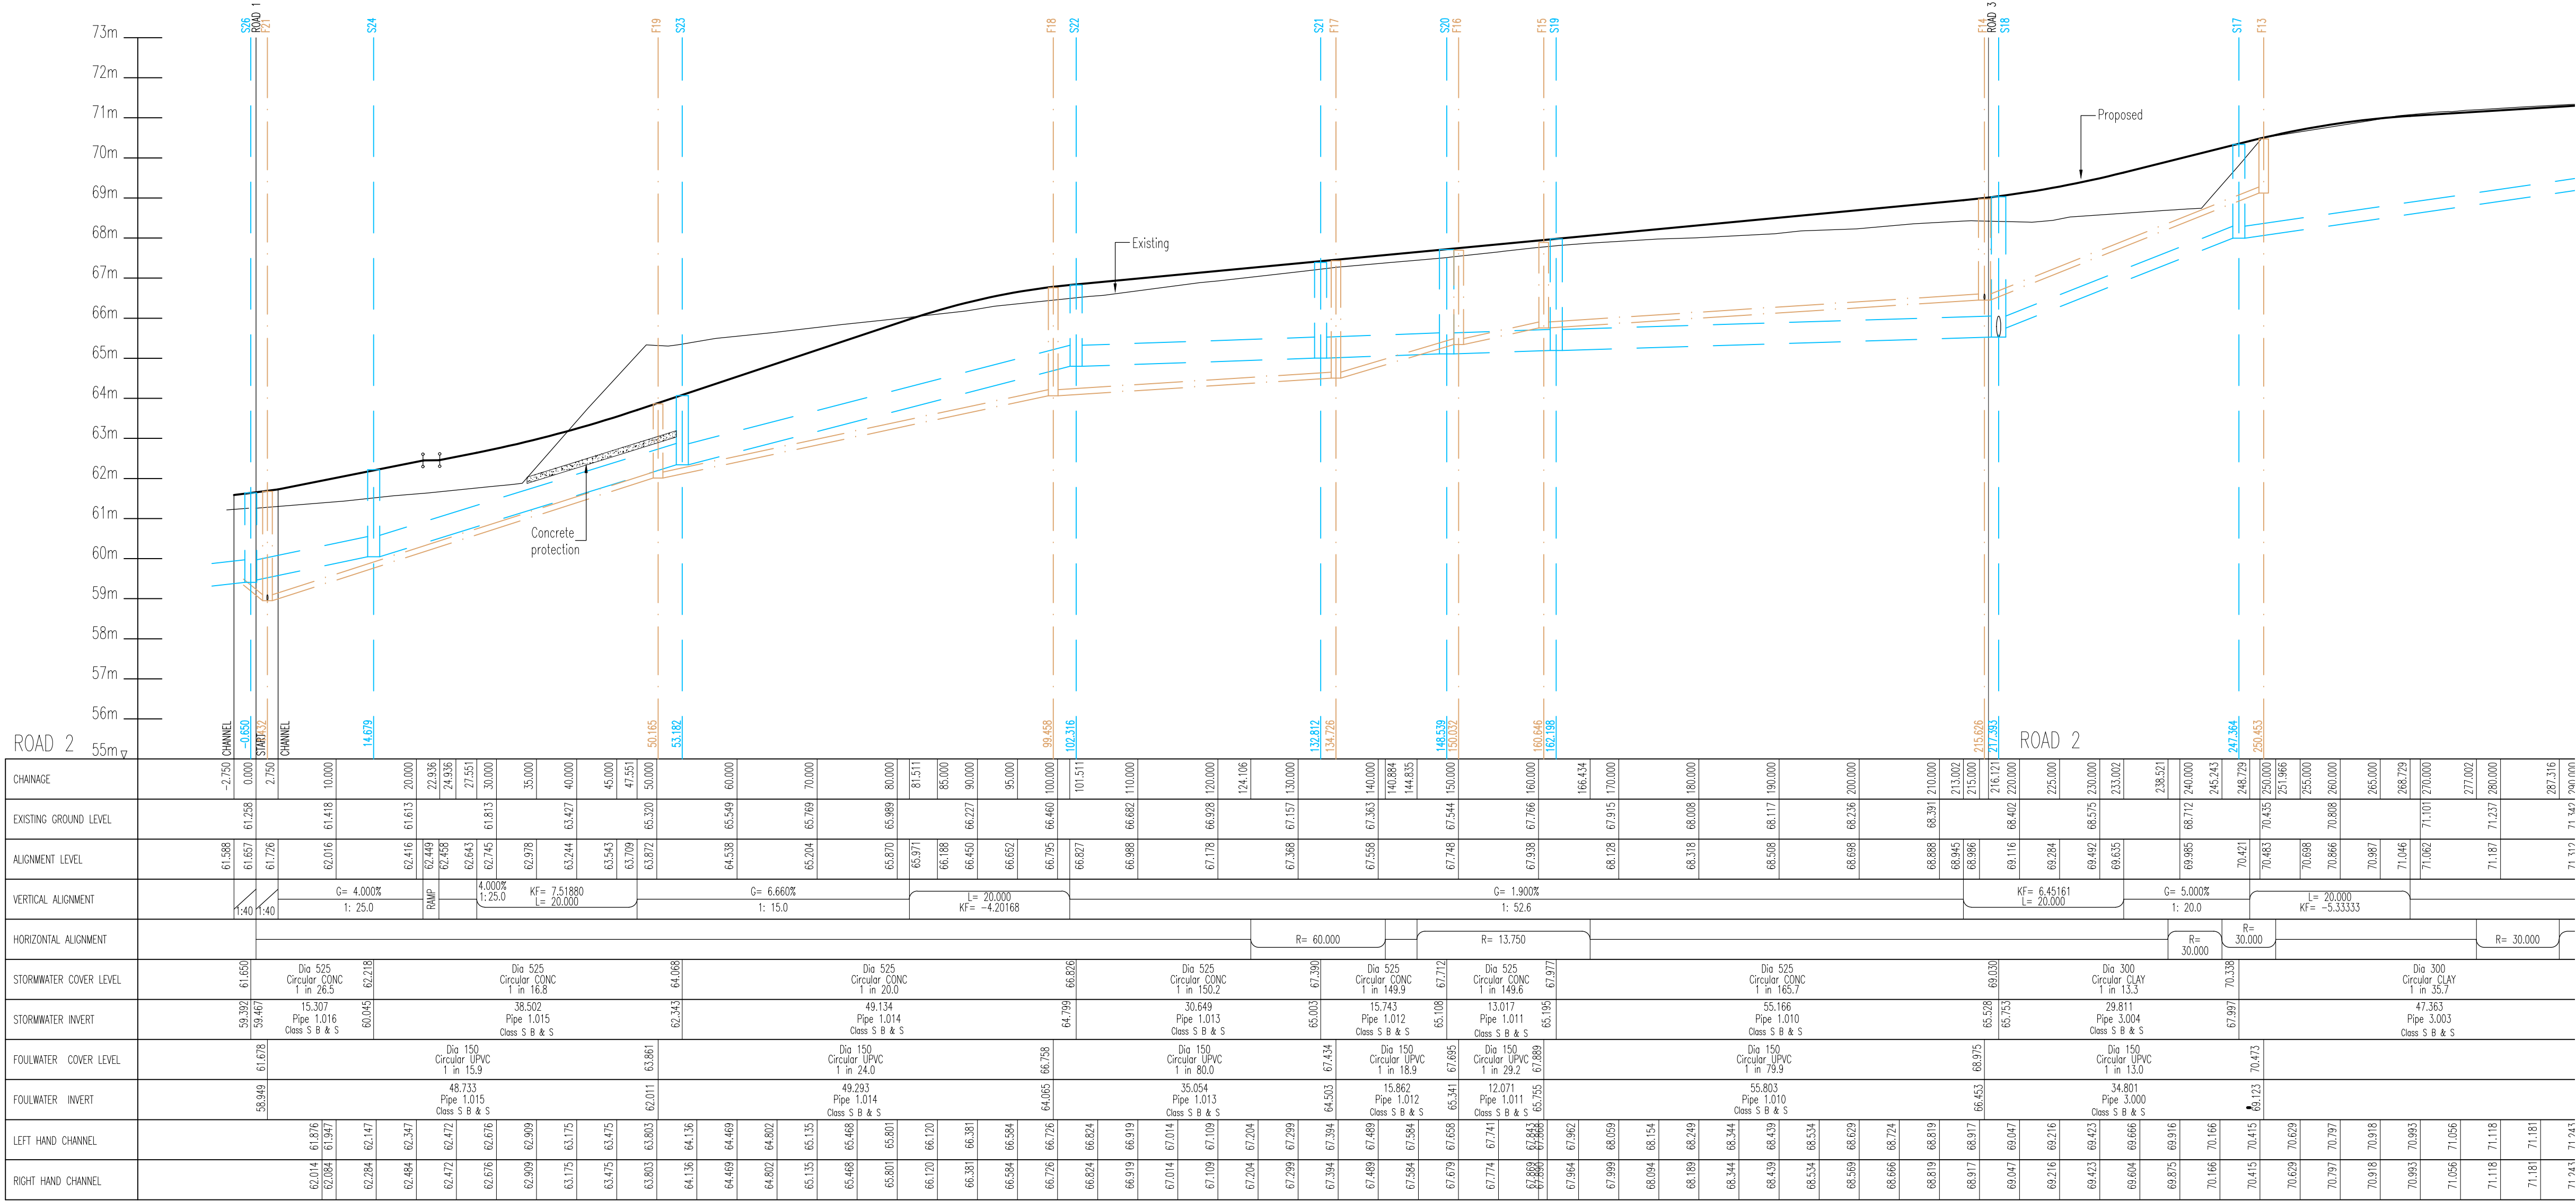

REFER TO 0425/87/03.01 & 03.02 CROSSOVER LOCATIONS

SUBJECT TO THE APPROVAL OF ALL RELEVANT AUTHORITIES

C	CR	10.07.23	Right & left channels added.		MI
F	RJ	07.03.23	Updated MH positions on Road 4		MI
E	BHB	08.02.23	Road 2&4 ramp amended	RJ	MI
D	RJ	01.02.23	MH co-ordinates amended	RJ	MI
C	JMG	09.11.22	Drainage updated to avoid services & new outfall levels		MI
B	JMG	08.07.22	Updated for INWL submission		MI
A	JMG	27.06.22	Revised to Millers Layout & new road design		MI
/	DJC	27.05.22	Issued for approval	MI	MI
Rev	By	Date	Revision	Chk	Apvd.

ARP ARP ASSOCIATES
Chartered Consulting Engineers

Northwest House • 5 & 6 Northwest Business Park • Servia Hill, Leeds • L56 2QH
☎ 0113 245 8498 ☎ 0113 244 3864 ✉ leeds@arpassociates.co.uk ✉ www.arpassociates.co.uk
ARP Associates is a trading division of ARP Geotechnical Ltd, a company registered in England and Wales with company number 3773833, whose registered office is at 5/6 Northwest Business Park, Servia Hill, Leeds LS6 2QH

TITLE
LONGITUDINAL SECTIONS SHEET 2 OF 5
PROJECT
GYPSY LANE, WOMBWELL
CLIENT
MILLER HOMES (YORKSHIRE) LTD
DRAWING STATUS
PRELIMINARY
Scale
1:500HV 1:100V © A1
Date
MAY 22
Drawn
DJG
Chk.
MI
Drg. No.
0425/87/06.02
Rev
G

NOTE
There should be enough earance to accommodate the bedding for both pipes, approx 300mm. If crossover is near the rocker then the earance needed may be increased.

