




Long Wheel Base Panel Van (7.5t Panel Van)

Maneuvering from May Day Green down Kendray Street to the Market Stalls

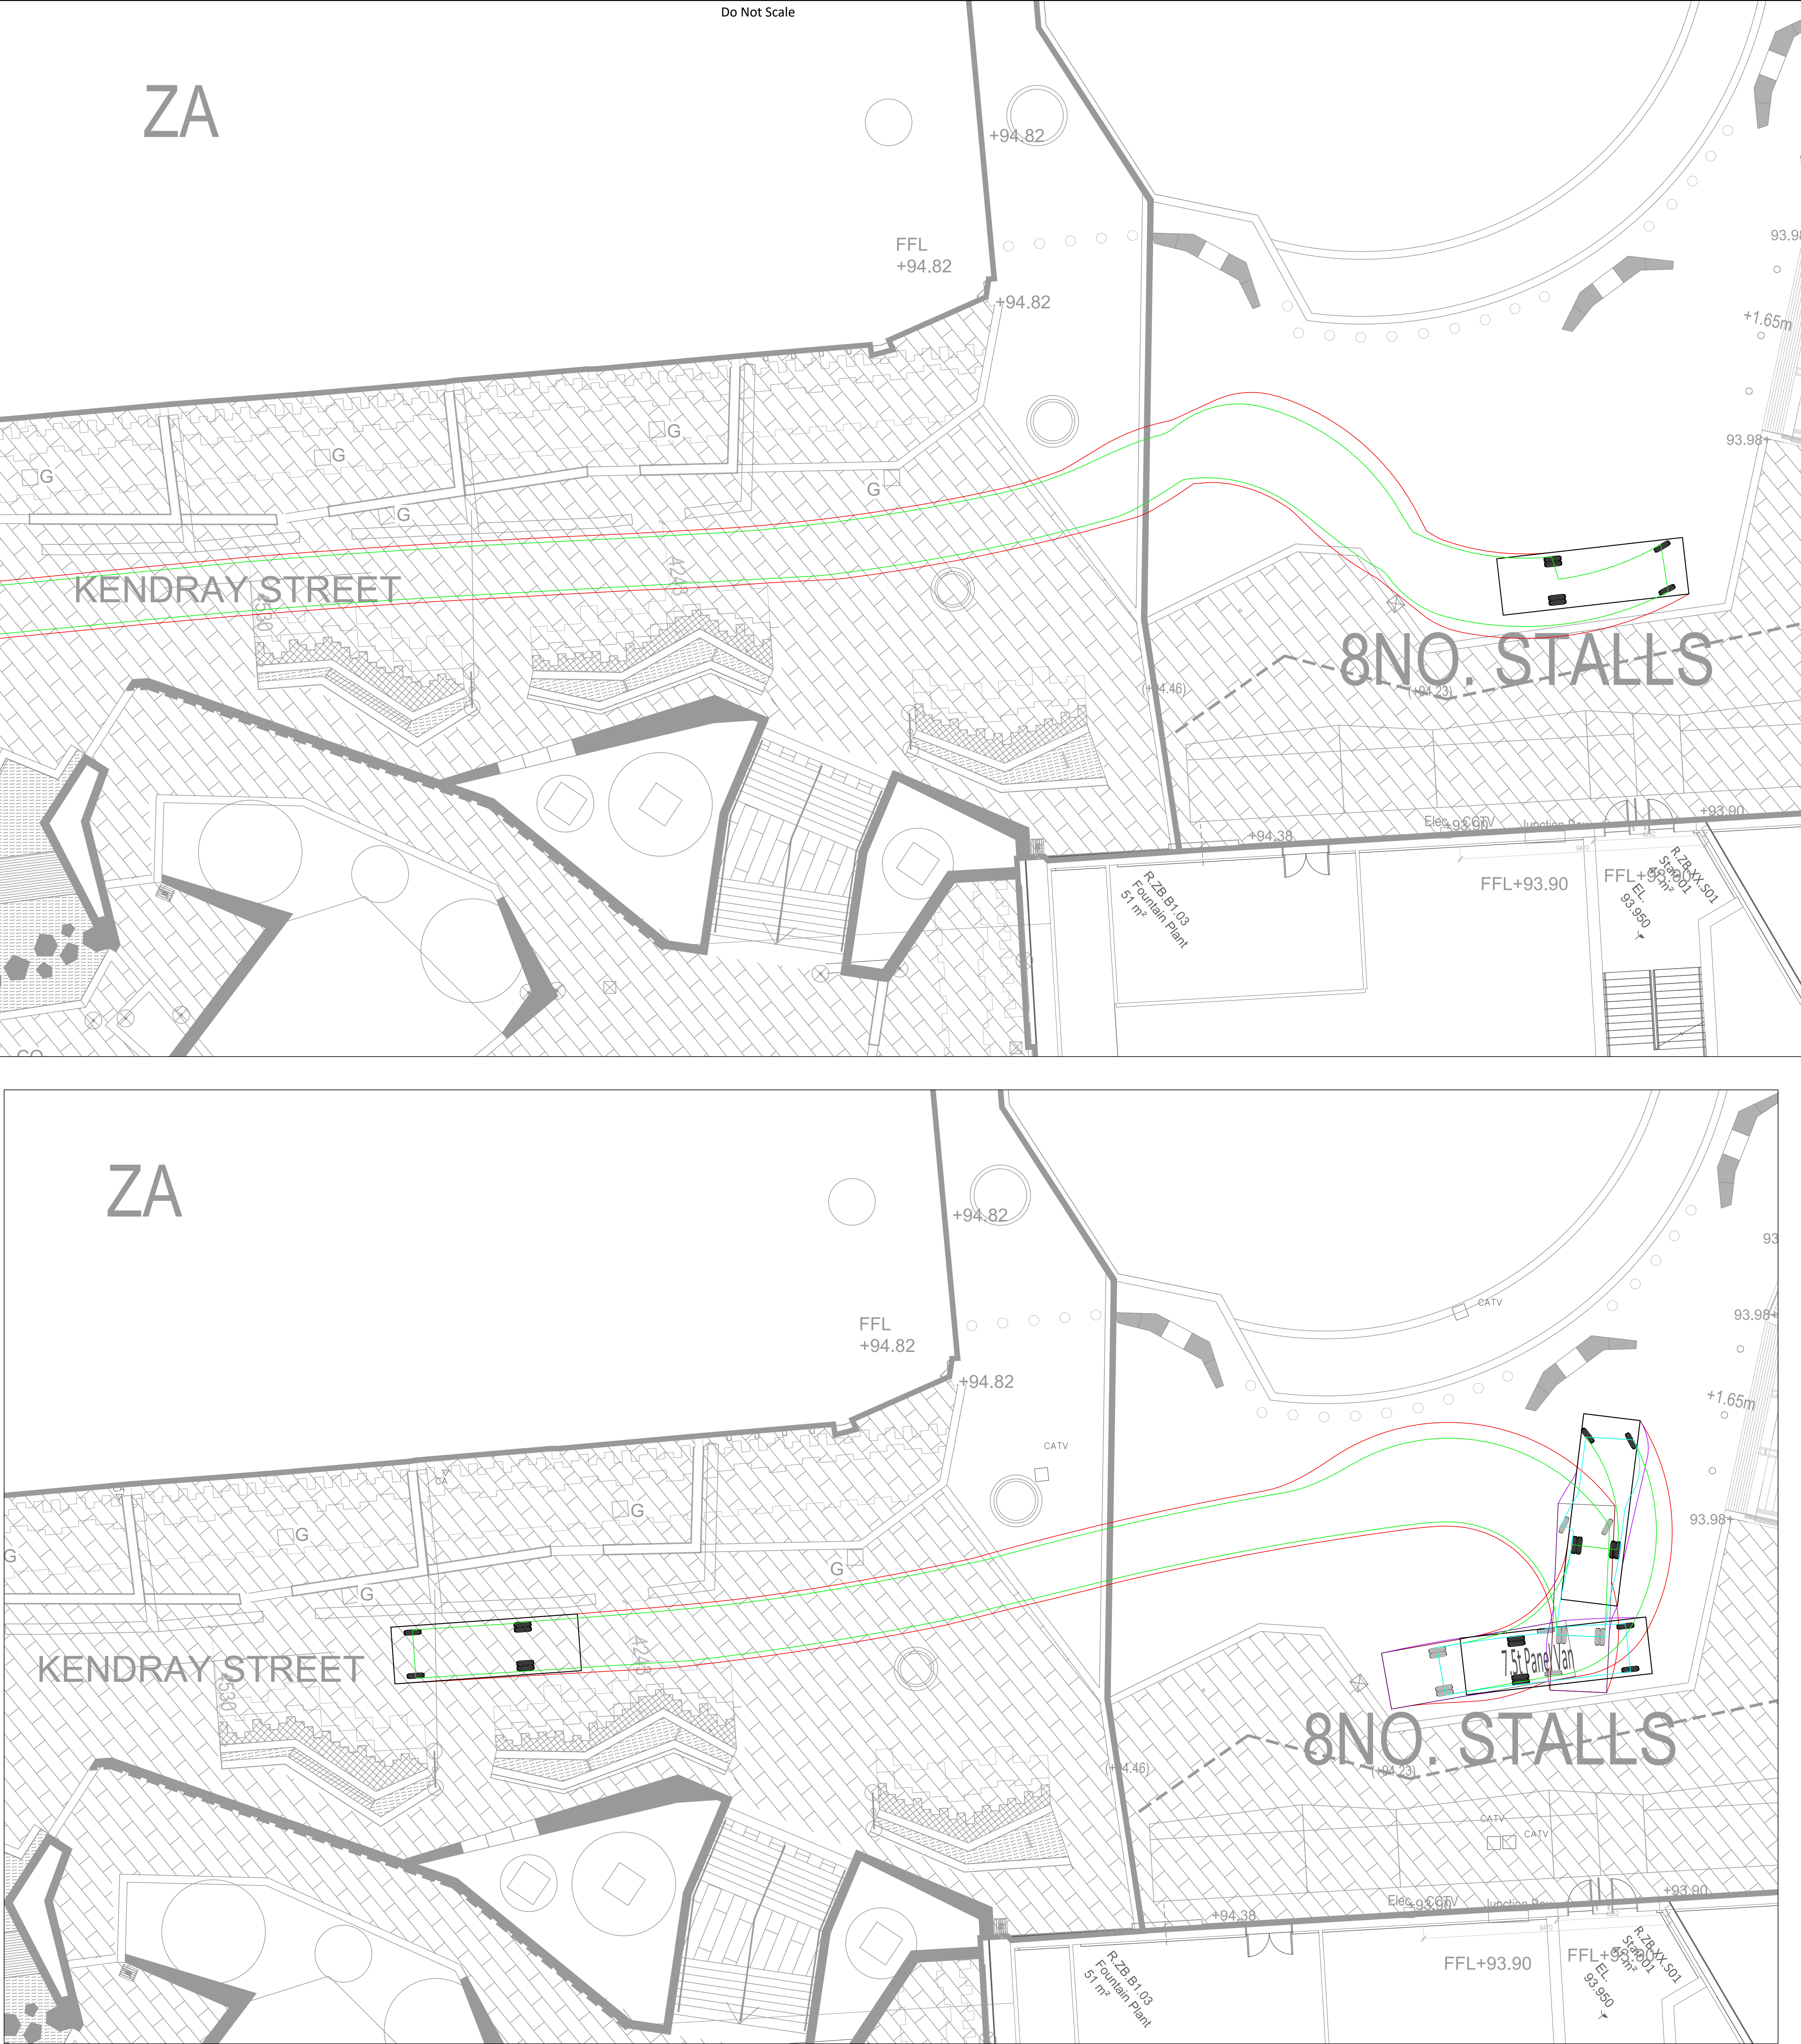

Long Wheel Base Panel Van (7.5t Panel Van)

Maneuvering out of Loading Area for Market stalls down Kendray Street

DESIGN REVIEW

Design review by: \*\* Checked by: \*\*

Residual hazards:

Health, Safety & Environmental Notes

Drawing Notes

Vehicle Tracking Notes

1. Vehicle tracking has been completed using Autodesk Vehicle Tracking software

2. Vehicles used for tracking may vary from those used on site, any discrepancies between tracked vehicle specification & those intended to be used should be reported back to Adept Consulting Engineers

3. Autodesk Vehicle Tracking does not take into account driver ability, weather, vehicles or road conditions.

4. All manoeuvres have been tracked with a forward design speed of 5MPH and reverse design speed of 2.5MPH

Key

Body Outline

Chassis Outline

Body (Reverse) Outline

Chassis (Reverse) Outline

7.5t Panel Van

Overall Length 7.210m

Overall Width 2.192m

Overall Body Height 2.544m

Min Body Ground Clearance 0.316m

Track Width 1.865m

Lock to lock time 4.00s

Kerb to Kerb Turning Radius 7.400m

04.08.20

Updated to show tracking routes into Market Stalls

03.08.20

Initial Issue

Date

Revision

By

Chkd

Rev

ADEPT

Engineering Better Solutions Together

INVESTORS IN PEOPLE

CONSTRUCTION

Web: [www.adeptcsc.co.uk](http://www.adeptcsc.co.uk)

Email: [info@adeptcsc.co.uk](mailto:info@adeptcsc.co.uk)

Originating Office

1912 Mills, Sunny Bank Mills,

Barley, Leeds, LS23 5LJ

Tel: 0113 2394518

Project

The Glass Works, Barnsley

Title

Vehicle Tracking - White Van

Client

Henry Boot

CONSTRUCTION

Scale @ A0

Drawn: JR

Checked

WD

Date

03.08.2020

Suitability

S2

Purpose

Information

UPPER

Originator

Zone Level

Type

Role

Class

Eng No.

Rev.

BGW2-ACE-XX-XX-DR-C-6700-0180-P2