




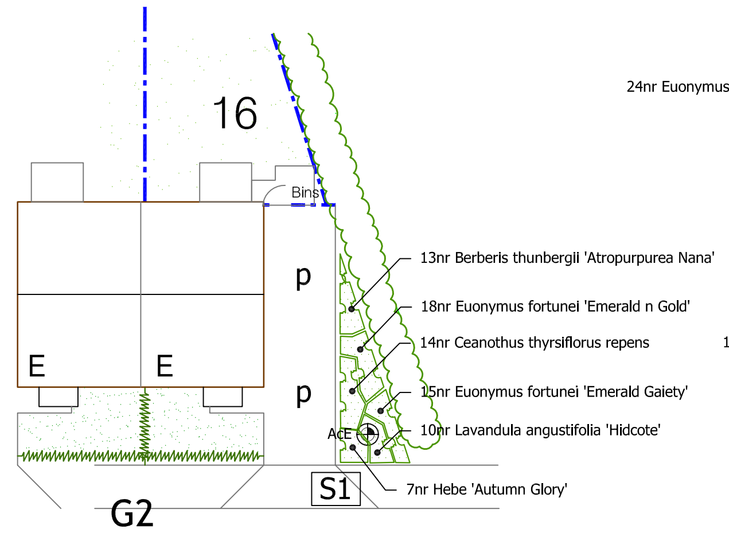


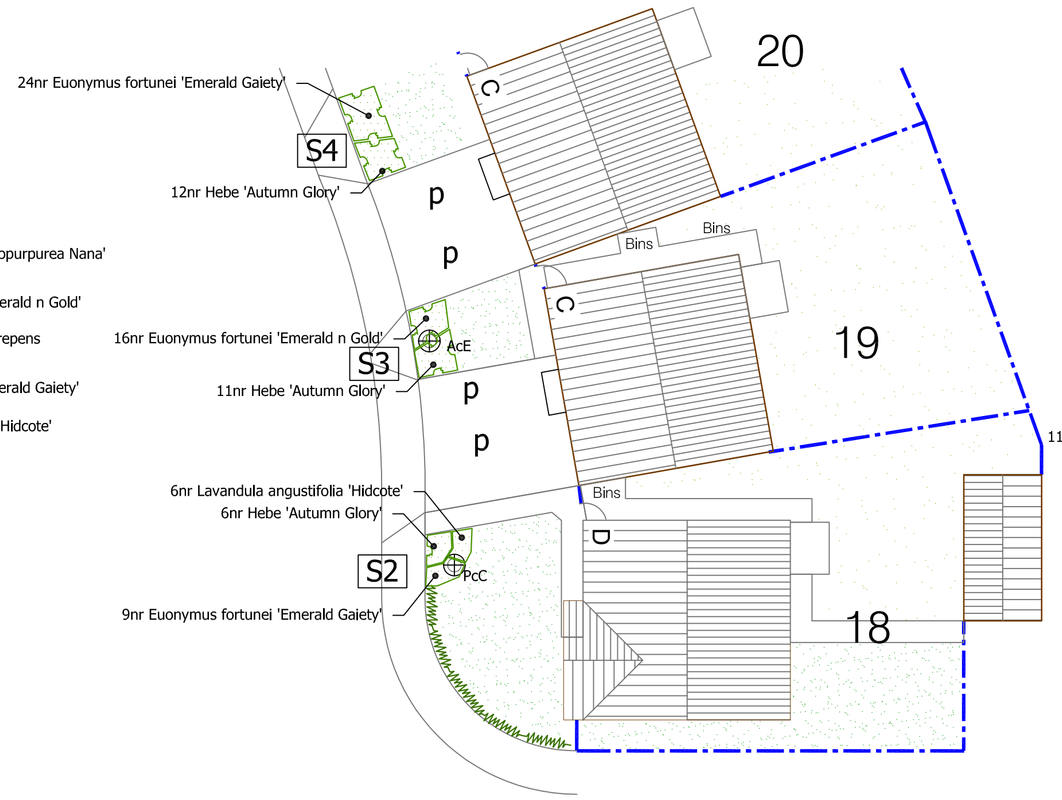

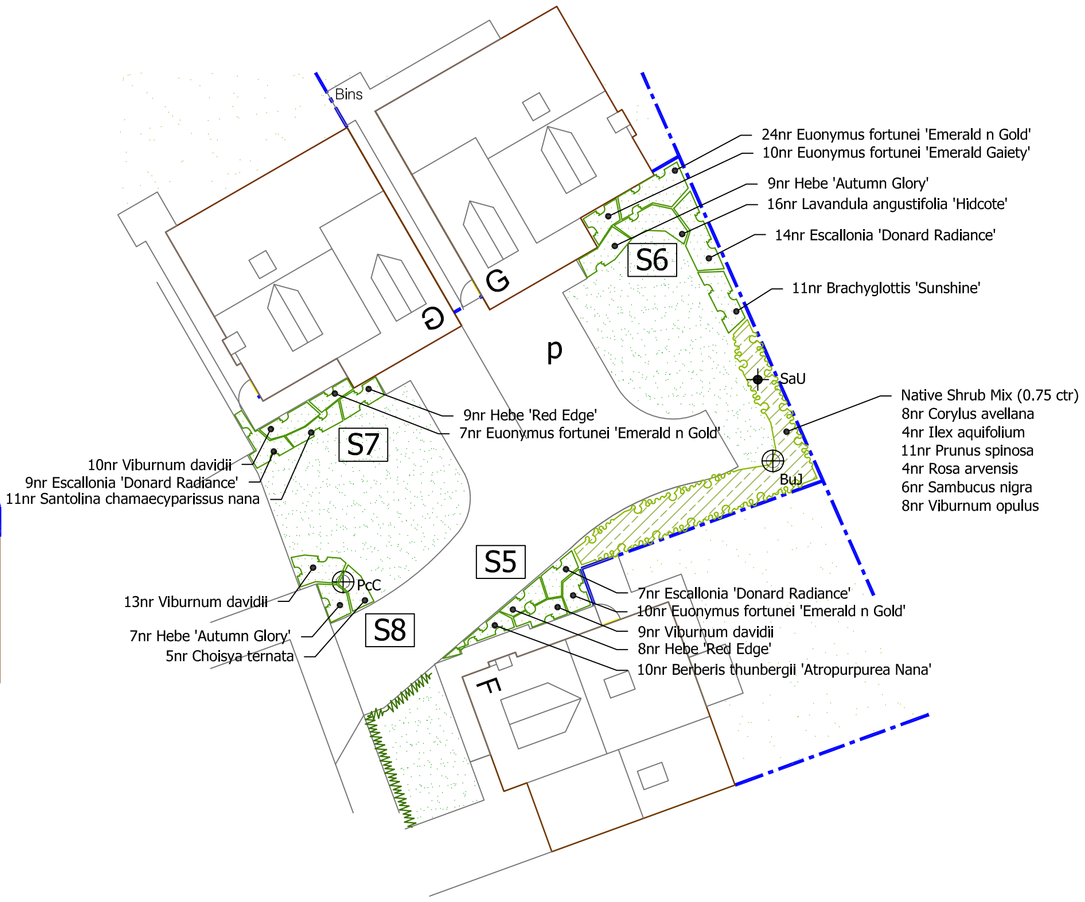

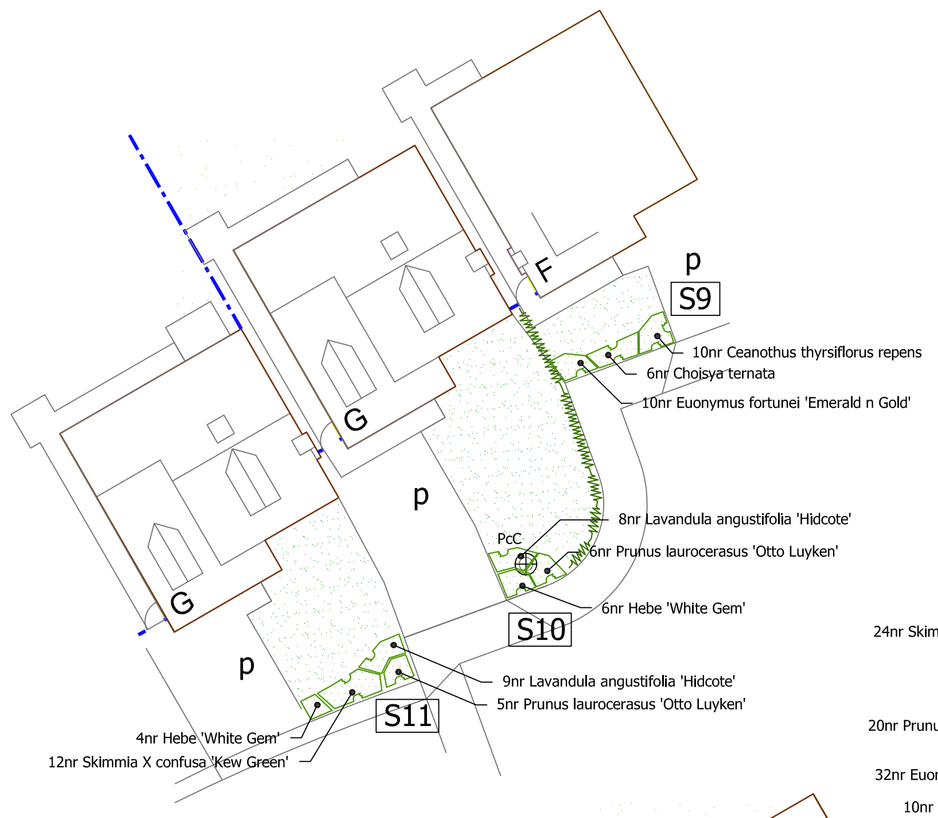

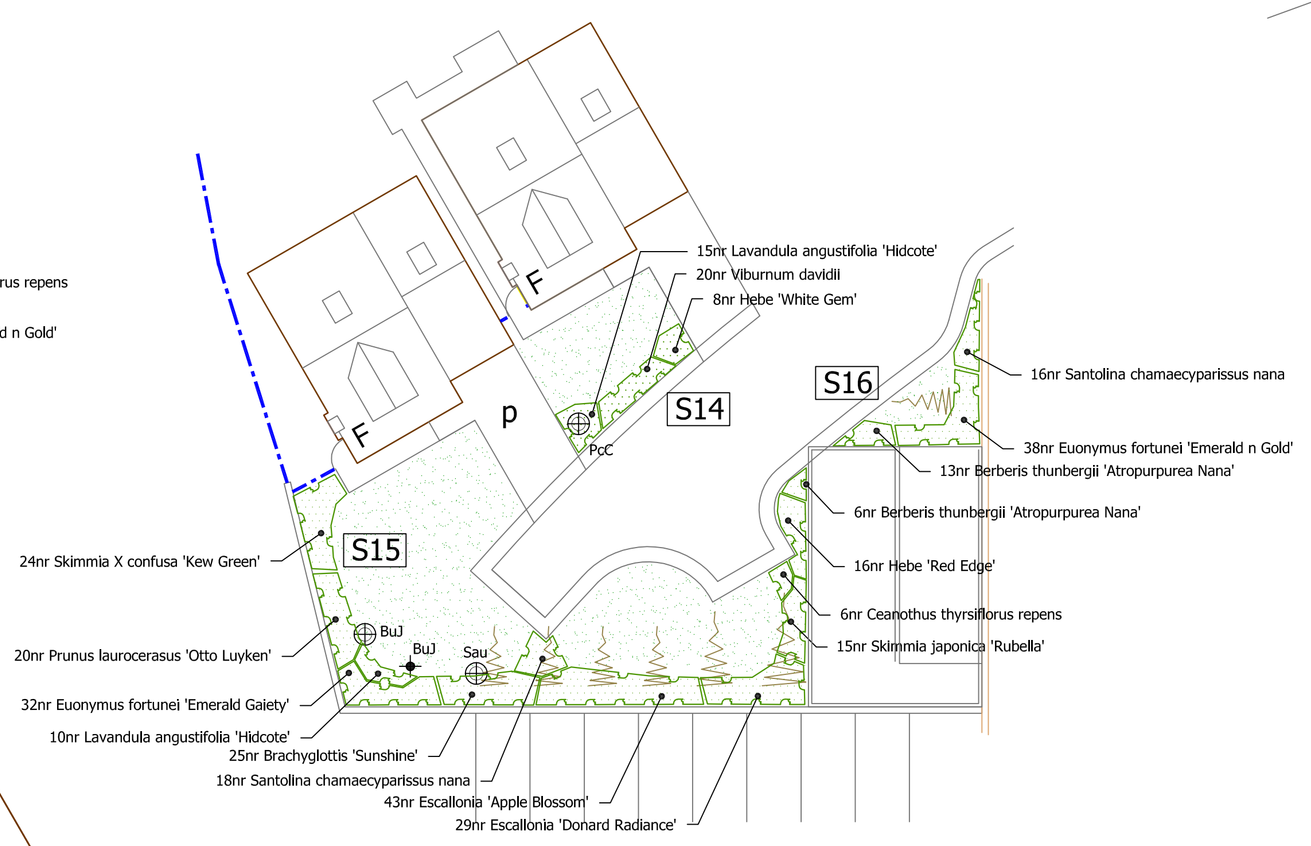

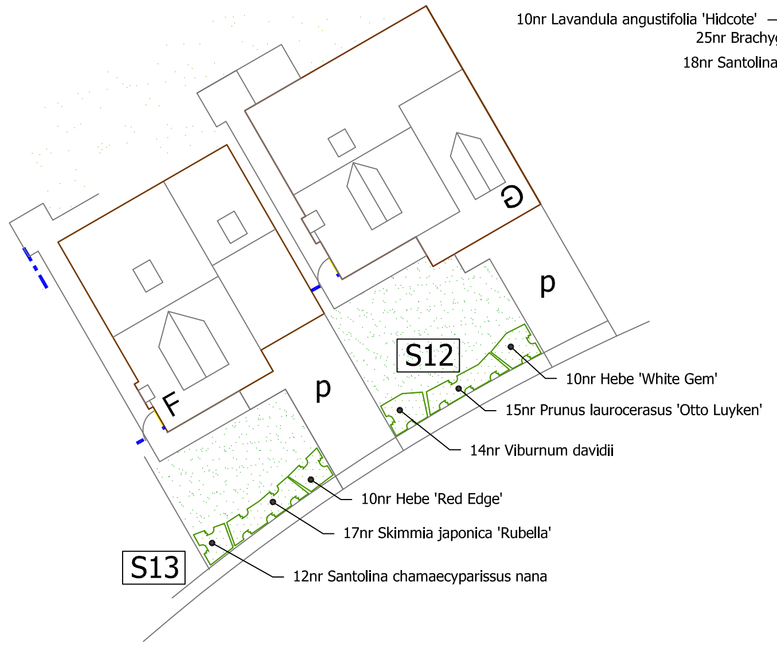

PLANTING SCHEDULES

SHRUB SCHEDULE

ORNAMENTAL PLANTING SCHEDULE				
Herbaceous				
Nr	Name	Ht in cm	Pot(L)	Density
17	Geranium macrorrhizum 'Bevans Variety'		3L	5.00
Shrub				
Nr	Name	Ht in cm	Pot(L)	Density
59	Berberis thunbergii 'Atropurpurea Nana'	20-30cm	3L	6.00
36	Brachyglottis 'Sunshine'	30-40cm	3L	4.00
36	Ceanothus thyrsiflorus repens	30-40cm (D)	3L	5.00
22	Cholsya ternata	30-40cm	3L	3.00
21	Clstus laxus 'Snow White'	30-40cm	3L	5.00
60	Escallonia 'Apple Blossom'	30-40cm	3L	4.00
102	Escallonia 'Donard Radiance'	40-60cm	3L	4.00
202	Euonymus fortunel 'Emerald Gaiety'	20-30cm (D)	3L	6.00
207	Euonymus fortunei 'Emerald n Gold'	20-30cm (D)	3L	6.00
85	Hebe 'Autumn Glory'	20-30cm	3L	4.00
73	Hebe 'Red Edge'	20-30cm	3L	5.00
31	Hebe 'White Gem'	30-40cm	3L	4.00
103	Lavandula angustifolia 'Hidcote'	20-30cm	3L	5.00
94	Prunus laurocerasus 'Otto Luyken'	30-40cm	3L	4.00
57	Santolina chamaecyparissus nana	20-30cm	3L	6.00
70	Skimmia japonica 'Rubella'	30-40cm	3L	4.00
61	Skimmia X confusa 'Kew Green'	30-40cm	3L	4.00
117	Viburnum davidii	20-30cm	3L	5.00

All shrub material shall be first quality, sturdy, well rooted non-refridgerated stock with well branched heads and fibrous root systems. Shrubs shall be planted into 450mm good quality fibrous topsoil incorporating organic compost and slow release fertiliser in accordance with all good horticultural practice.
All plant material shall be a minimum of 3L pot size unless otherwise specified and conform to BS3936 Part 1 and BS 4428. Finished beds shall be lightly forked over and dressed with 50mm coarse forest bark mulch.

TREE SCHEDULE

SPECIES		NUMBERS REQUIRED		
	Ht in m	3.0-3.5	3.5-4.0	4.0-4.5
	Girth in cm	10-12	12-14	14-16
Acer campestre 'Elsrijk'(AcE)		0	4	3
Amerlanchier lamarckii(Al)		3	0	0
Betula utilis var. jacquemontii (Buj)		5	2	0
Malus 'Evereste' (ME)		2	0	0
Malus tschonoskii (Mt)		2	0	0
Pyrus calleryana 'Chanticleer' (PcC)		0	6	0
Sorbus aucuparia (Sau)		1	1	0
Sorbus aucuparia 'Sheerwater Seedling' (SaSS)		1	1	0

All trees to have clear stems to 1.8m minimum above ground level with well developed branching heads with a single, central leader and healthy, fibrous root systems.
Trees shall be planted into pits of an appropriate size to accommodate the root system without restriction and backfilled with a 3:1 topsoil:compost mix. Light standard, standard and selected standard trees shall be single staked using a machine rounded stake and 1 nr. tree tie with rubber spacer. Heavy standard trees planted in shrub beds shall be double staked with two nr. 100mm diameter machine rounded short stakes and half round cross rail. Trees shall be secured to the cross rail with 1nr. rubber tie and spacer. Finished height of stake shall not exceed 1/3 height of staked tree above ground.
Foundation design of new buildings shall accommodate proposed tree planting in accordance with NHBC guidelines.

HEDGE SCHEDULES

BEECH HEDGE SCHEDULE

Species	Age	Size in cm	Nos Reqd
Fagus sylvatica	1+1	60-80	1048

Hedge to be planted as a double staggered row with plants set 200mm apart (7/linm)

ESCALLONIA HEDGE

Species	Pot Size	Size in cm	Nos Reqd
Escallonia 'Apple Blossom'	5L	60-80	29

Hedge to be planted as a single row 300mm apart (3/linm)

Plant material to be planted into prepared trenches backfilled with a 3:1 mix of multi-purpose topsoil to BS3882:2015 and proprietary planting compost with added slow release fertiliser. For the Beech hedge the trench shall be a minimum of 400mm wide by 400mm deep. For the Escallonia and Laurel hedges the trench shall be a minimum of 150mm wider and deeper than the pot rootball and the plants shall be planted at even spacings in a continuous line. The hedge lines shall be mulched after planting with a uniform depth of 50mm depth forest mulch.

NATIVE SPECIES

NATIVE SHRUB MIX					
Nr	Name	Height/cm	Age	Root	Pot/L
8	Corylus avellana	40-60cm	1+1	B	
4	Ilex aquifolium	40-60cm		C	3L
11	Prunus spinosa	60-80cm	1+1	B	
4	Rosa arvensis	60-80cm	1+1	B	
6	Sambucus nigra	60-80cm	1+1	B	
8	Viburnum opulus	60-80cm	1+1	B	

Native species shall be planted into 450mm depth, good quality clean topsoil incorporating organic compost and slow release fertiliser, over un-compacted sub-grade. Prior to planting all bareroot plant stock shall be dipped into a suitable mychorrizal plant dip in accordance with the manufacturers recommendations. Plants shall be planted in groups of 3-11 of a single species with the taller growing species to the back of the areas of the areas and the lower growing species to the edges of the areas. Planted areas to be mulched after planting with coarse grade forest mulch to a uniform depth of 50mm.

GRASS SEEDING

LOW MAINTENANCE GRASS MIX
100mm depth of topsoil complying with BS3882 to be spread to area and pre-seed fertiliser to be applied at 50gm/m². Soil to be cultivated using a disc harrow or rotovator, to 50mm depth then further cultivated and rolled to produce a firm seed bed. Low maintenance grass seed mix such as Germinal A22 mix to be sown at 35gm/m2 to the rear gardens of properties.

TURFING TO FRONTAGES
The topsoiled area to be turfed, is to be graded and cross-graded to even running falls, to allow the finished level of the turf to be 40mm above adjoining paved areas. The surface should be lightly and uniformly firmed by rolling or treading, and reduced to a fine tilth up to 25mm in depth. All rubbish, stones greater than 50mm diameter etc, shall be removed from the surface. Apply an even application of approved fertiliser at a rate of 70g/m and rake in. No turves shall be laid in exceptionally dry or frosty weather or in other unsuitable weather conditions. The turves shall be laid in a stretcher bond pattern, closely butted and firmed into position, to the correct levels. The turves should be laid off planks, working over turves previously laid. A dressing of finely sifted topsoil (complying with BS 3882) should be applied to the laid turf and brushed well into the joints. Water the turves to prevent drying out before establishment.

Sue Farmer BA MALD MLI
Landscape Architect

fda landscape

Westleigh Hall
Wakefield Road
Denby Dale
Huddersfield HD8 8QJ
telephone 01484 861611
fax 01484 861616
isdn 01484 866900
email info@fdalandscape.co.uk
www.fdalandscape.co.uk

client: Jaguar Estates

project: Residential Development

BOX MILL LANE, PENISTONE

drawing title: LANDSCAPE DETAILS

scale	date	drwn by	drawing no
1:200 @A1	Apr 17	SEL	R/1978/2