

Small Rose BOM

Item	Fitting	Location	QTY	Length	Total Length	Pixel Count	Pixel Total	Wattage Each	Wattage total	Beam Angle
A	Anolis Calumma XS MC	Inner Stamen	12			1	12	10	120	45
B	Enttec Smart PXL-40P	Inner canopy	204			1	204	1.8	367.2	180
C	DZA Linear LED	Inner Rosette	12	1590	19080	26	312	47.7	572.4	180
D	Anolis Calumma S MC	Middle Petal	12			1	12	30	360	45
E	Enttec Smart PXL-40P	Outer canopy	204			1	204	1.8	367.2	180
F	DZA Linear LED	Outer Rosette	12	2675	32100	44	528	80.25	963	180
G	Anolis Lyrae XS FIX MC	Inground closer to stem	12			1	12	10	120	12
H	Anolis Lyrae M MC	Inground	6			1	6	60	360	45
I	EBOX REMOTE	Stem Base	1							
J	WISKA Joint BoxWK407	TOP platform	36							
H	WISKA Joint BoxWK1210	Stem Base	3							
I	Consumer Unit Enclosure	Stem Base	1							
J	MEANWELL PSU 320-24	Stem Base	3							
K	MEANWELL PSU 600-24	Stem Base	3							
L	Pixel Control Enclosure	Stem Base	1							
M	Data Distribution Enclosure	Stem Base	1							
N	Incoming Supply Isolator	Stem Base	1							
O	EVID-S8.2 Speakers	TOP Platform	6							
P	Fiber Media Converter	Stem Base	1							
Q	DMX interface	Stem Base	1							

Small Rose CCT Schedule

Circuits	MCB	Fitting	Location	QTY	Length	Total Length	Pixel Count	Pixel Total	Wattage Each	Wattage total	Beam Angle	TOTAL WATTAGE
1	C10	EBOX REMOTE	LV Supply in Stem									
		Anolis Calumma XS MC	Inner Stamen	12			1	12	10	120	45	
		Anolis Lyrae XS FIX MC	Inground closer to stem	12			1	12	10	120	12	240
2	C10	Anolis Calumma S MC	Middle Petal	12			1	12	30	360	45	360
3	C10	LV Supply 1										
		Enttec Smart PXL-40P	Inner canopy 1-4	68			1	68	1.8	122.4	180	
		Linear LED	Inner Rosette 1-4	4	1590	6360	26	104	47.7	190.8	180	
		Enttec Smart PXL-40P	Outer canopy 1-4	68			1	68	1.8	122.4	180	
		Linear LED	Outer Rosette 1-4	4	2675	10700	44	176	80.25	321	180	756.6
4	C10	LV Supply 2										
		Enttec Smart PXL-40P	Inner canopy 5-8	68			1	68	1.8	122.4	180	
		Linear LED	Inner Rosette 5-8	4	1590	6360	26	104	47.7	190.8	180	
		Enttec Smart PXL-40P	Outer canopy 5-8	68			1	68	1.8	122.4	180	
		Linear LED	Outer Rosette 5-8	4	2675	10700	44	176	80.25	321	180	756.6
5	C10	LV Supply 3										
		Enttec Smart PXL-40P	Inner canopy 9-12	68			1	68	1.8	122.4	180	
		Linear LED	Inner Rosette 9-12	4	1590	6360	26	104	47.7	190.8	180	
		Enttec Smart PXL-40P	Outer canopy 9-12	68			1	68	1.8	122.4	180	
		Linear LED	Outer Rosette 9-12	4	2675	10700	44	176	80.25	321	180	756.6
6	C10	Anolis Lyrae M MC	Inground	6			1	6	60	360	45	360
7	C10	Control Circuits		1								
8		Spare										
								1290		3229.8		


Large Rose BOM

Item	Fitting	Location	QTY	Length	Total Length	Pixel Count	Pixel Total	Wattage Each	Wattage total	Beam Angle
A	Anolis Calumma XS MC	Inner Stamen	12			1	12	10	120	45
B	Enttec Smart PXL-40P	Inner canopy	204			1	204	1.8	367.2	180
C	DZA Linear LED	Inner Rosette	12	1784	21408	29	348	53.52	642.24	180
D	Anolis Calumma S MC	Middle Petal	12			1	12	30	360	45
E	Enttec Smart PXL-40P	Outer canopy	204			1	204	1.8	367.2	180
F	DZA Linear LED	Outer Rosette	12	3420	41040	57	684	102.6	1231.2	180
G	Anolis Lyrae XS FIX MC	Inground closer to stem	12			1	12	10	120	12
H	Anolis Lyrae M MC	Inground	6			1	6	60	360	45
I	EBOX REMOTE	Stem Base	1							
J	WISKA Joint BoxWK407	TOP platform	36							
H	WISKA Joint BoxWK1210	Stem Base	3							
I	Consumer Unit Enclosure	Stem Base	1							
J	MEANWELL PSU 320-24	Stem Base	3							
K	MEANWELL PSU 600-24	Stem Base	3							
L	Pixel Control Enclosure	Stem Base	1							
M	Data Distribution Enclosure	Stem Base	1							
N	Incoming Supply Isolator	Stem Base	1							
O	EVID-S8.2 Speakers	TOP Platform	6							
P	Fiber Media Converter	Stem Base	1							
Q	DMX interface	Stem Base	1							

Large Rose CCT Schedule

Circuits	MCB	Fitting	Location	QTY	Length	Total Length	Pixel Count	Pixel Total	Wattage Each	Wattage total	Beam Angle	TOTAL WATTAGE
1	C10	EBOX REMOTE	LV Supply in Stem									
		Anolis Calumma XS MC	Inner Stamen	12			1	12	10	120	45	
		Anolis Lyrae XS FIX MC	Inground closer to stem	12			1	12	10	120	12	240
2	C10	Anolis Calumma S MC	Middle Petal	12			1	12	30	360	45	360
3	C10	LV Supply 1										
		Enttec Smart PXL-40P	Inner canopy 1-4	68			1	68	1.8	122.4	180	
		Linear LED	Inner Rosette 1-4	4	1784	7136	29	116	53.52	214.08	180	
		Enttec Smart PXL-40P	Outer canopy 1-4	68			1	68	1.8	122.4	180	
		Linear LED	Outer Rosette 1-4	4	3420	13680	57	228	102.6	410.4	180	869.28
4	C10	LV Supply 2										
		Enttec Smart PXL-40P	Inner canopy 5-8	68			1	68	1.8	122.4	180	
		Linear LED	Inner Rosette 5-8	4	1784	7136	29	116	53.52	214.08	180	
		Enttec Smart PXL-40P	Outer canopy 5-8	68			1	68	1.8	122.4	180	
		Linear LED	Outer Rosette 5-8	4	3420	13680	57	228	102.6	410.4	180	869.28
5	C10	LV Supply 3										
		Enttec Smart PXL-40P	Inner canopy 9-12	68			1	68	1.8	122.4	180	
		Linear LED	Inner Rosette 9-12	4	1784	7136	29	116	53.52	214.08	180	
		Enttec Smart PXL-40P	Outer canopy 9-12	68			1	68	1.8	122.4	180	
		Linear LED	Outer Rosette 9-12	4	3420	13680	57	228	102.6	410.4	180	869.28
6	C10	Anolis Lyrae M MC	Inground	6			1	6	60	360	45	360
7	C10	Control Circuits		1								
8		Spare										
								1482		3567.84		

DZA:technical

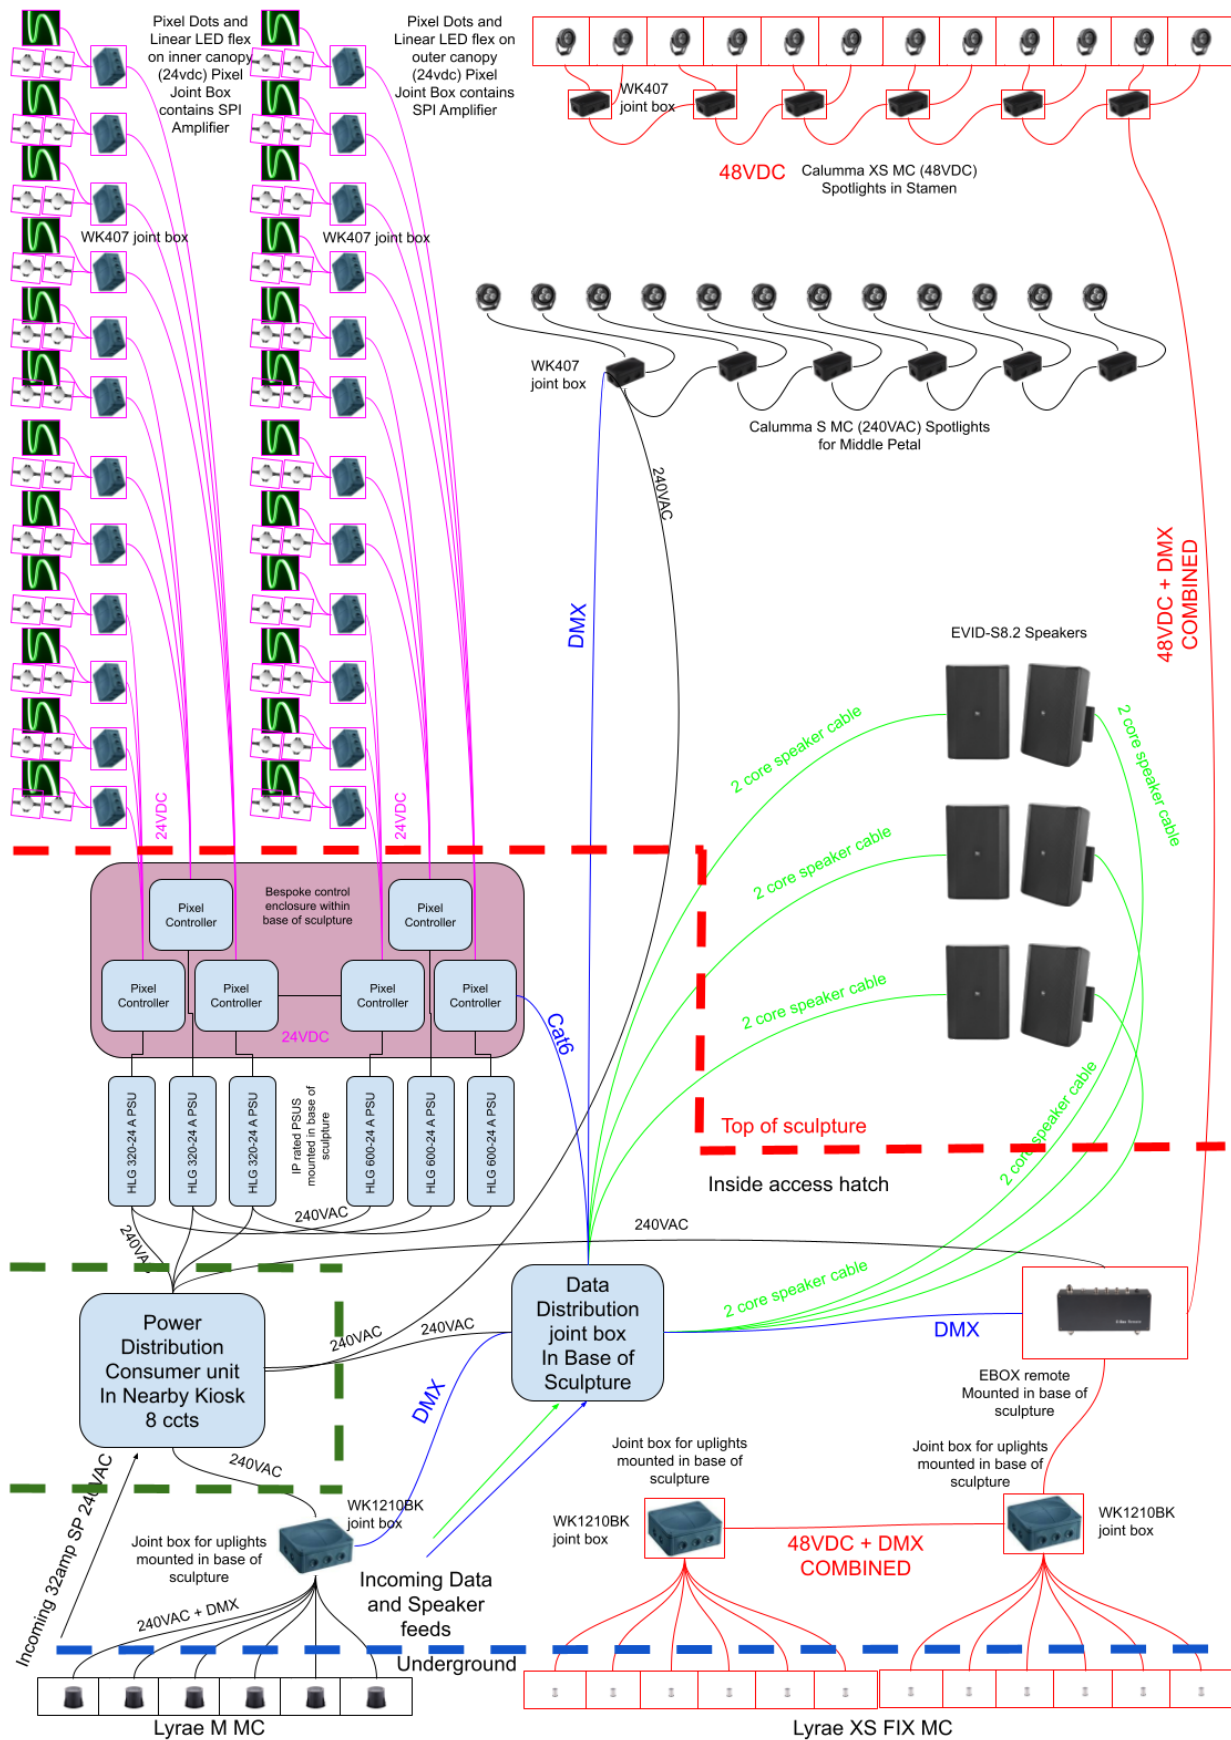

Telephone: +44 (0)1903 267 003

Website: www.dzat.co.uk

email: hello@dzat.co.uk

Company Trading Address : 12 Northbrook Business Park, Northbrook Road, Worthing, BN14 8PQ

Company Registration Number : 0424 1685 Company Registered Address : 41b Beach Road, Littlehampton, BN17 5JA

Company Vat Number : 780 739 889