


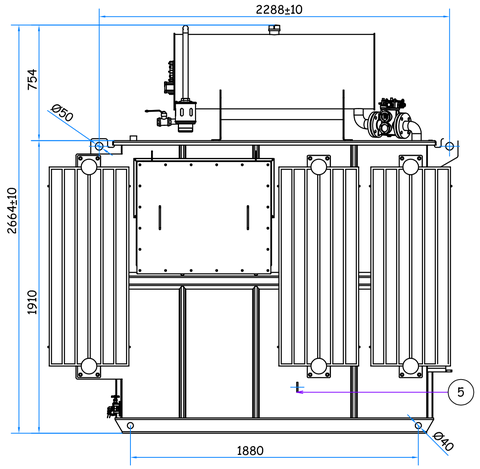


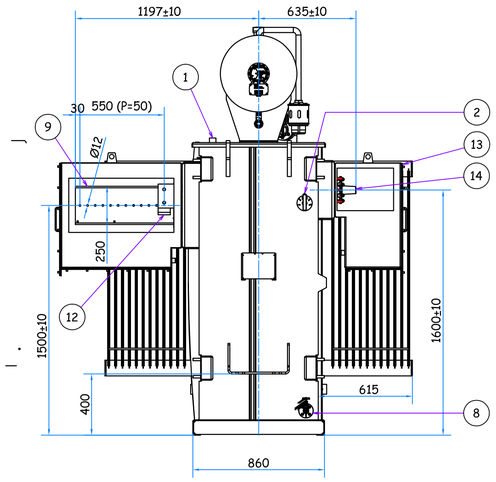

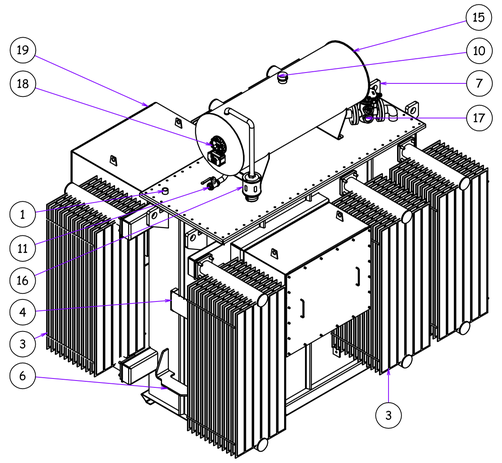

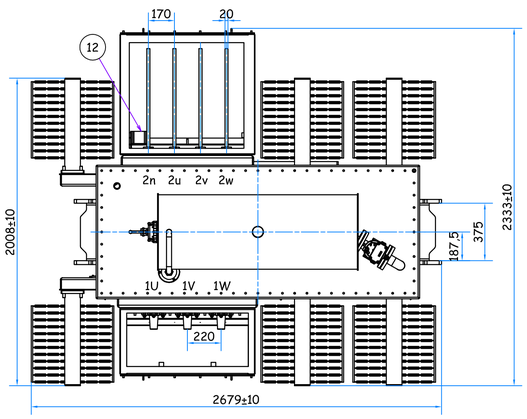

POS	DESCRIPTION
19	LV CABLE BOX 6000 A
18	OIL LEVEL INDICATOR WITH CONTACTS
17	BUCHHOLZ COMEM BR50-2 CE N.O.
16	DEHYDRATING BREATHER COMEM EM2DB
15	CONSERVATOR
14	PLUG-IN RESIN BUSHING PPS 36/400A INTERFACE "B" EN50180
13	MV CABLE BOX
12	NEUTRAL EARTH LINK
11	CONSERVATORE DRAIN VALVE 1" G
10	FILLING CAP
9	PIOCH COPPER BUSHING N°44 AS 250 20 843
8	DRAIN VALVE DN15 PN10 1/2" G
7	LIFTING LUGS
6	JACKING PADS
5	EARTHING TERMINALS FLAT TYPE Ø14
4	RATING PLATE
3	RADIATORS
2	OFF LOAD TAP CHANGER
1	POCKET WELL 1" G

Peso Globale / Total Weight: 10100 kg +5 -10 % tolerance	Peso Olio / Oil Weight: 2020 kg	Finitura esterna / External Coating ISO 12944: RAL 7031 C3	Data/Date: 26/11/2015	Disegnato/Drawn by: Martini	Ver/Checked by: Schiavoi
Formato/Size: A2	Scala/Scale: 1:14	Terminale/Gruppo Vettoriale / Voltages-Vector Group: 33 ± 2X2,5% / 0,4 kV Dyn11		TOLLERANZA NON INDICATE SECONDO UNI EN 22768 GRADO MEDIO WHERE NOT INDICATED TOLERANCES REFER TO UNI EN 22768 MEDIUM GRADE	

Descrizione/Description: LAYOUT 4000 KVA

N° disegno/Drawing N.: A13709

Codice/ Part N.: EB3O36.4000

Matricola/Serial N.: 11369.1

Foglio/Sheet: 1

La GBE S.p.A. si riserva a termine di legge la proprietà del presente disegno/GBE S.p.A. reserves property rights to this drawing to all legal effects

SCALE	1:20 @ A1
DATE	09/09/16
DRAWN	MM
CHECKED	SO
APPROVED	GJ

BARNSLEY (GRID REFERENCE : SE319081)

33KV TRANSFORMER

PLANNING APPLICATION NO

ISSUE	DATE	ISSUE	DATE	ISSUE	DATE	ISSUE	DATE	ISSUE	DATE	ISSUE	DATE

CLIENT: Peak Power Connections Limited

DRG. No.: G000237-1013-A_D12

STERLING POWER UTILITIES

A1

X:\7 CAD\GENERATION DRAWINGS\SO DEV CO\G000237- BARNSLEY_awaiting layout\G000237-1012-A _D11_33KV TRANSFORMER.dwg