

HAYES MCKENZIE

PARTNERSHIP



Prepared for:

*Endurance Wind Power, Inc.
#107-19052 26th Ave
Surrey, BC
Canada, V3S 3V7*

Endurance E-3120 Wind Turbine Acoustic Performance Test

Report HM: 2300/R1

6th April 2011

16a The Courtyard, Dean Hill Park, West Dean, Salisbury SP5 1EY, UK
Tel. +44 (0)1794 342343, Fax +44 (0)1794 342344, hmpl@hayesmckenzie.co.uk
● Offices in Salisbury & Machynlleth ●



ENDURANCE E-3120 WIND TURBINE

ACOUSTIC PERFORMANCE TEST

Report HM : 2300/R1

6th April 2011

Final Version

Prepared by: Rob Shepherd MEng, MIOA, AMImechE

Checked by: Sylvia Broneske Dipl.-Ing. MIOA, VDI

Approved by: Andrew R McKenzie PhD, BSc, MIOA



Contents

1. Introduction 3

2. Turbine Specification 4

3. Measurement 5

 Site Layout and Measurement Position..... 5

4. Instrumentation..... 7

 Non-Acoustic Data 7

5. Results 8

 Measured Noise Levels 8

 Calculation of $L_{WA,k}$ 9

 1/3 Octave Band Data 10

 Narrow Band Analysis 10

6. Other Acoustic Characteristics..... 11

7. Uncertainty 11

8. Conclusions 12

9. References 13

Tables

Table 1 - Turbine Specifications 4

Table 2 - Distances and Reference Values 6

Table 3 – Non-acoustic Data 8

Table 4 – Number of 1-minute Noise Data Points Recorded per Wind Speed Bin 8

Table 6 - Calculation of L_{WA} Uncertainty U_A 12

Table 7 - Calculation of Uncertainty U_C 12



1. Introduction

- 1.1 A turbine noise performance test has been carried out on a Endurance E-3120 wind turbine at East Ash Farm located approximately 2.5km NNE of Bradworthy, Devon, in the UK.
- 1.2 The turbine has a hub height of 25m and a downwind rotor with a diameter of 19.2m. The wind turbine is passive stall regulated and has a rated power of 50 kW, which is achieved at a wind speed of approximately 9.5 m/s at hub height.
- 1.3 The objective of this test was to measure the noise performance characteristics of the wind turbine. The test consisted of measurement of the sound power level and tonal characteristics.
- 1.4 This noise test was conducted in accordance with IEC 61400-11 (2006) *Wind Turbine Generator Systems – Part 11: Acoustic Noise Measurement Techniques*.
- 1.5 The noise measurements were carried out on 1st and 2nd February 2011.
- 1.6 Analysis of the data was carried out according to Method 2: *determination of wind speed with an anemometer* described in IEC 61400-11, as it was not possible to derive the wind speed from the power output of the turbine.



2. Turbine Specification

2.1 The wind turbine is a three-bladed, passive stall regulated (constant speed) downwind turbine. The turbine's specification, as required by IEC 61400-11 and supplied by the manufacturer, is shown in Table 1 below.

Table 1 - Turbine Specifications

| Parameter | Value/Feature |
|-------------------------------|---|
| Manufacturer | Endurance Wind Power |
| Model Number | E-3120 |
| Serial Number | EWP-E-01-00123 |
| Type (upwind/downwind) | Downwind, horizontal axis |
| Hub Height | 25m |
| Rotor Diameter | 19.2m |
| Tower Type | Free-standing Monopole |
| Turbine Control (stall/pitch) | Passive stall |
| Rotational Speed | Constant, 43 rpm |
| Rated Power | 50 kW (at 9.5 m/s at rotor centre) |
| Cut-in Wind Speed | 3.5 m/s |
| Cut-out Wind Speed | 25 m/s |
| Control Software Version | PLC Phoenix Contact - PLC Code version 1.4.11 |
| Rotor Control Devices | Full blade pitching (centrifugally activated) |
| Blade Type | Fibreglass / epoxy |
| Number of Blades | 3 |
| Gearbox Manufacturer | Flender |
| Gearbox Type | 3 parallel stages |
| Generator Manufacturer | ABB |
| Generator Rotational Speed | 1500 rpm |



3. Measurement

Site Layout and Measurement Position

- 3.1 The site layout is shown at Appendix A. The site was characterised as open farmland bordered by hedgerows, which includes occasional trees. The E-3120 turbine which was the subject of these tests is the only wind turbine on this site.
- 3.2 IEC 61400-11 (2006) *Wind Turbine Generator Systems – Part 11: Acoustic Noise Measurement Techniques* [1] specifies that the microphone used for the noise tests is to be mounted on a 1 m diameter ground-mounted board, facing in the direction of the wind turbine under test, at a distance corresponding to the tip height of the turbine (+/- 20%) directly downwind of the turbine. According to [1], measured noise data is valid as long as the board is within the downwind sector (i.e. +/- 15° of the directly downwind direction). Photos of the noise monitoring equipment set up are shown at Appendix B.
- 3.3 The microphone was fitted inside a primary hemispherical open cell foam wind shield of 90 mm in diameter laid flat on the board. The primary wind shield was surrounded by a secondary hemispherical foam wind shield of 450 mm diameter and 50 mm thickness. The insertion loss of the secondary wind shield is shown at Appendix C. The ground board was 20mm plywood with a diameter of 1000mm.
- 3.4 An anemometer was positioned approximately 45m upwind of the rotor of the turbine to measure wind speed. This is within the 2 to 4 D range specified by IEC 61400-11, where D is the rotor diameter of the wind turbine (here D = 19.2 m). Wind speed values are valid as long as the anemometer position is within the upwind sector (i.e. +/- 30° of the directly upwind direction), and the anemometer was moved during the survey to ensure that it was within allowable tolerances.
- 3.5 Wind speed and wind direction measurements, time-synchronised to the noise measurements, were made using a Second Wind C3 anemometer and an NRG #200P wind vane mounted at 10 m height connected to a Nomad 2 GSM data logger.
- 3.6 The microphone and the met mast position were within the acceptable ranges relative to the position of the nacelle, specified by IEC 61400-11 as discussed at paragraph 3.2, throughout the whole measurement period.



- 3.7 Table 2 details the measurement positions. $R_{0,i}$ is the reference distance on each measurement day and is the horizontal distance from the microphone to the nacelle. R_1 is the resultant slant distance from the measurement position to the nacelle.

Table 2 - Distances and Reference Values

| Parameter | Symbol | Value |
|----------------------------|------------|---------------------|
| Hub Height | H | 25.3 m ¹ |
| Rotor Diameter | D | 19.2 m |
| Reference Distance day 1 | $R_{0,1}$ | 31.5 m |
| Reference Distance day 2 | $R_{0,2}$ | 31.5 m |
| Slant Distance day 1 | R_1 | 40.4 m |
| Slant Distance day 2 | R_2 | 40.4 m |
| Reference Roughness Length | z_{0ref} | 0.05 m |
| Anemometer Height | z | 10 m |

- 3.8 During the noise tests the wind turbine was shut down for certain periods to allow for background noise measurements in order to establish the level of contribution from other noise sources.
- 3.9 Whilst on site, the average 1-minute electrical power output of the turbine was noted down from the turbine operational data once a minute during noise measurements; although at present there is not a power curve available to determine the 10m-height wind speed from the power output. Method 2 described in IEC 61400-11 has therefore been used to determine the sound power level output of the turbine. It would be possible to re-analyse the data with wind speed derived from the electrical power output of the turbine once a power curve (measured according to IEC 61400-12) is available for this turbine.
- 3.10 Amendment 1 (2006) to IEC 61400-11 states that where the hub height is lower than 30m, wind speed may be taken from an anemometer between 10m and hub height.

¹ Including concrete base



4. Instrumentation

4.1 Noise measurements were carried out using the following equipment:

General

Bruel & Kjaer Type 4231 calibrator (Serial No. 2218188)

Reference Position

01dB Symphonie Measurement System (Serial No. 00587)

PCB Microphone (Serial No. 377A02)

G.R.A.S. Type 26AK Pre-Amplifier (Serial No. 22826)

Secondary Windshield – Performance detailed at Appendix C

4.2 Meteorological measurements were carried out using the following equipment:

Logger

Second Wind Nomad II (S/N 05587)

Anemometer and Wind Vane

Second Wind C3 Anemometer (S/N 05531)

NRG #200P Wind Vane (S/N AV1102)

Temperature and Pressure Sensors

Second Wind Thermistor Temperature Probe (S/N TH84)

Setra Model 276 Barometric Pressure Sensor (S/N 4404452)

4.3 The noise measurement equipment was field calibrated prior to each measurement being performed and checked at the end. There was no recorded drift in the calibration of the equipment for any measurements. All equipment was within its laboratory calibration period.

4.4 Noise and wind measurements were time-synchronised to GMT, and all measurements were averaged over one minute, with the exception of the air pressure which was sampled every one minute.

Non-Acoustic Data

4.5 Table 3 below details the non-acoustic data reported as required by IEC 61400-11.

**Table 3 – Non-acoustic Data**

| Wind speed determination method | Measured 10m height |
|---------------------------------|---------------------|
| Roughness length | 0.05m |
| Air temperature, day 1 | 5.9 - 9.1°C |
| Air temperature, day 2 | 6.3 - 9.5 °C |
| Atmospheric pressure, day 1 | 1000.0 – 1002.0 mB |
| Atmospheric pressure, day 2 | 995.6 – 999.5 mB |
| Wind direction range, day 1 | 254.4 – 332.7° |
| Wind direction range, day 2 | 238.0 – 280.7° |

5. Results

Measured Noise Levels

- 5.1 The measured 1-minute average L_{Aeq} noise data was plotted against the measured average 1-minute 10m height wind speed for operational periods and separately for shutdown periods. All noise data has been filtered such that any 1-minute period that was affected by specific extraneous noises such as vehicles passing on local roads, and any other anomalies, have been removed from the assessment.
- 5.2 Appendix D shows the measured operational noise and measured background noise at the microphone position, plotted against the measured 10m-height wind speed. Table 4 below details the number of operational data points in each wind speed range measured over the 2 days.
- 5.3 Appendix D also shows the measured 1-minute average L_{Aeq} noise data was plotted against electrical power output of the turbine.

Table 4 – Number of 1-minute Noise Data Points Recorded per Wind Speed Bin

| Period | | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | Total |
|-------------------------------|---------------------|---|----|----|----|----|----|----|---|----|----|----|-------|
| 1 st February 2011 | Turbine Operational | 2 | 33 | 31 | 16 | 14 | 1 | 0 | 0 | 0 | 0 | 0 | 97 |
| | Background Noise | 0 | 14 | 20 | 10 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 46 |
| 2 nd February 2011 | Turbine Operational | 0 | 0 | 0 | 1 | 12 | 20 | 19 | 9 | 16 | 12 | 5 | 94 |
| | Background Noise | 0 | 0 | 0 | 0 | 5 | 13 | 7 | 9 | 4 | 8 | 5 | 51 |
| Totals | Turbine Operational | 2 | 33 | 31 | 17 | 26 | 21 | 19 | 9 | 16 | 12 | 5 | 191 |
| | Background Noise | 0 | 14 | 20 | 10 | 7 | 13 | 7 | 9 | 4 | 8 | 5 | 97 |



Calculation of $L_{WA,k}$

5.4 IEC 61400-11 requires that a 4th order regression line is plotted through the measured operational data. A 3rd order polynomial regression line has been plotted through the turbine shutdown noise data, as it fits the data better than a 4th order regression line.

5.5 The $L_{WA,k}$ has been calculated using the formula below specified in IEC 61400-11. A correction has been applied to account for secondary wind shield, which has been calculated from the measured 1/3 octave band levels across wind speeds from 3-12 m/s.

$$L_{WA,k} = L_{Aeq,c,k} - 6 + lg \left[\frac{4\pi R_1^2}{S_0} \right]$$

Where

$L_{Aeq,c,k}$ is the background corrected A-weighted sound pressure level at the integer wind speeds and under reference conditions

R_1 is the slant distance in meters from the rotor centre to the microphone as shown

S_0 is a reference area, $S_0 = 1\text{m}^2$

5.6 The results are plotted at Appendix E and in tabular form below at Table 5. Note that the results shown at Appendix E are not corrected for the presence of the secondary wind shield.

Table 5 - Calculation of Sound Power Level using 4th Order Regression Line

| 10m-height wind speed (m/s) | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Total Measured Operational Noise Levels (dB L_{Aeq}) | 49.8 | 50.1 | 50.3 | 50.8 | 51.8 | 53.4 | 55.4 | 57.3 | 58.6 | 58.6 |
| Background Noise Level (dB L_{Aeq}) | 35.9 | 35.8 | 36.6 | 38.2 | 40.3 | 42.9 | 45.8 | 48.6 | 51.4 | 53.8 |
| Difference Between Total and Background Noise (dB) | 13.9 | 14.3 | 13.7 | 12.6 | 11.5 | 10.5 | 9.6 | 8.7 | 7.3 | 4.8 |
| Background Corrected Sound Pressure Level, $L_{Aeq,c,k}$ (dB L_{Aeq}) | 49.6 | 49.9 | 50.1 | 50.5 | 51.5 | 53.0 | 54.9 | 56.7 | 57.7 | 57.3 |
| Secondary Wind Shield Correction | 0.4 | 0.3 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.5 | 0.5 | 0.5 |
| Apparent Sound Power Level, $L_{WA,k}$ (dB L_{WA}) | 87.1 | 87.3 | 87.6 | 88.1 | 89.0 | 90.6 | 92.4 | 94.3 | 95.4 | 94.9* |



5.7 It should be noted that the difference between the total measured noise and measured turbine shutdown noise levels at 12m/s is less than 6dB. Therefore 1.3dB has been subtracted from the measured turbine noise as required by IEC 61400-11 and the result marked with an '*'.

1/3 Octave Band Data

5.8 As required by IEC 61400-11, the three one minute average periods closest to each integer wind speed have been used to calculate the energy average 1/3 octave band spectra between 20 and 10kHz for the operational turbine noise. The average background noise spectra have also been calculated from the nearest three nearest 1-minute average background noise periods closest to each integer wind speed. The results are plotted at Appendix F, which also shows the octave band levels. The data has been corrected for the insertion loss of the secondary wind shield.

5.9 It should be noted that there were only two 1-minute periods available for the operational wind speed of 12m/s. It should also be noted that only two 1-minute periods were available for the shutdown periods wind speed of 6, 8, and 10 m/s, and no data available for a wind speed of 7m/s.

5.10 The sound power level has been calculated for wind speeds for 6-8m/s as required by IEC 61400-11 for each 1/3 octave as measured and the results are shown in Appendix G, which also shows the octave band levels. The operational turbine noise spectra have been corrected for the presence of background noise by subtracting the average background noise. Note that the 6m/s background noise has been subtracted from the 7m/s spectrum as there was no background noise data for 7m/s. Where the difference between the measured turbine noise and measured background noise levels is less than 6dB the measured turbine noise has been corrected for background noise by subtracting 1.3dB as required by IEC 61400-11 and the result marked with an '*'.

5.11 It should be noted that it has not been possible to calculate the 1/3 octave sound power levels for wind speeds above 8m/s due to the influence of background noise.

Narrow Band Analysis

5.12 The presence of tones has been determined for wind speeds of 6-10 m/s following the procedure set out in IEC 61400-11, with the results presented at Appendix H. Note that the data has not been A-weighted or corrected for the insertion loss of the secondary wind shield.



5.13 The results of the narrow band analysis identified the presence of tones at 6m/s wind speed. No tones were identified at any other wind speed.

6. Other Acoustic Characteristics

6.1 The operational noise from the turbine can be characterised by aerodynamic noise from the blades rotating, together with a mechanical component from the gearbox.

6.2 It should be noted that the wind turbine tower is fitted with an external ladder and safety line. At wind speeds above about 8m/s a tonal noise was noted during the background noise measurements due to wind passing the ladder and safety line. This can be seen on the narrowband analysis charts shown Appendix H for wind speeds of 8-10 m/s at frequencies of 840 and 1015 Hz.

6.3 An audible pulse was noted from the wind turbine at higher wind speeds as the turbine blades pass the wake caused by wind around the tower. No assessment of impulsivity has been carried out, as it was not deemed significant enough to warrant further analysis.

7. Uncertainty

7.1 An assessment of measurement uncertainty has been carried out, based on the procedure outlined in Annex D of IEC 61400-11, as follows: Type A uncertainties are evaluated from the extent to which the measured values vary around the derived mean based on the regression analysis; Type B uncertainties are a measure of the assumed accuracy of various factors in the measurements procedure and have been based on the factors shown at the Annex D. The total uncertainty U_C is evaluated from the square root of the sum of the squares of each individual component.

7.2 The standard uncertainty of the apparent sound power is calculated in Table 6 using Equation D.1 in Annex D of IEC 61400-11. The total uncertainty of the measured L_{WA} calculated from all uncertainties, as given in Table 7, is ± 1.6 dB for the Reference Position.

**Table 6 - Calculation of L_{WA} Uncertainty U_A**

| | |
|----------------------|-------|
| Number of Elements | 191 |
| Standard Error U_A | 0.728 |

Table 7 - Calculation of Uncertainty U_C

| Type A Uncertainty | |
|--|------------|
| Standard Error of L_{WA} Estimate from Regression Analysis | 0.728 |
| Type B Uncertainty | |
| Calibration | 0.2 |
| Instrument | 0.2 |
| Board & Mounting | 0.3 |
| Distance | 0.2 |
| Impedance | 0.1 |
| Turbulence | 0.4 |
| Wind Speed Measured | 1.2 |
| Background | 0.3 |
| Total Uncertainty | |
| Total, U_C | 1.6 |

8. Conclusions

- 8.1 A noise test has been carried out, according to IEC 61400-11 on an Endurance E-3120 Wind Turbine at East Ash Farm, Bradworthy, Devon, to measure the sound power level and tonal characteristics.
- 8.2 The apparent sound power level of the wind turbine was calculated over a range of wind speeds from 3-12m/s together with the one third octave band levels for wind speeds of 6-8 m/s. It was not possible to calculate the 1/3 octave sound power levels above 8m/s due to the contrition of background noise.
- 8.3 The tonal output from the Endurance E-3120 turbine has been assessed using the methodology prescribed by IEC 61400-11 for wind speeds of 6-10 m/s and has been determined to be not tonal, except at a wind speed of 6m/s where tones were identified.




9. References

- [1] BS EN 61400-11 *Wind turbine generator systems – Part 11: Acoustic noise measurement techniques*, (Amendment 1 May 2006), International Electrotechnical Commission

Appendix A

Site Layout

Figure A1 – Endurance E-3120 Location

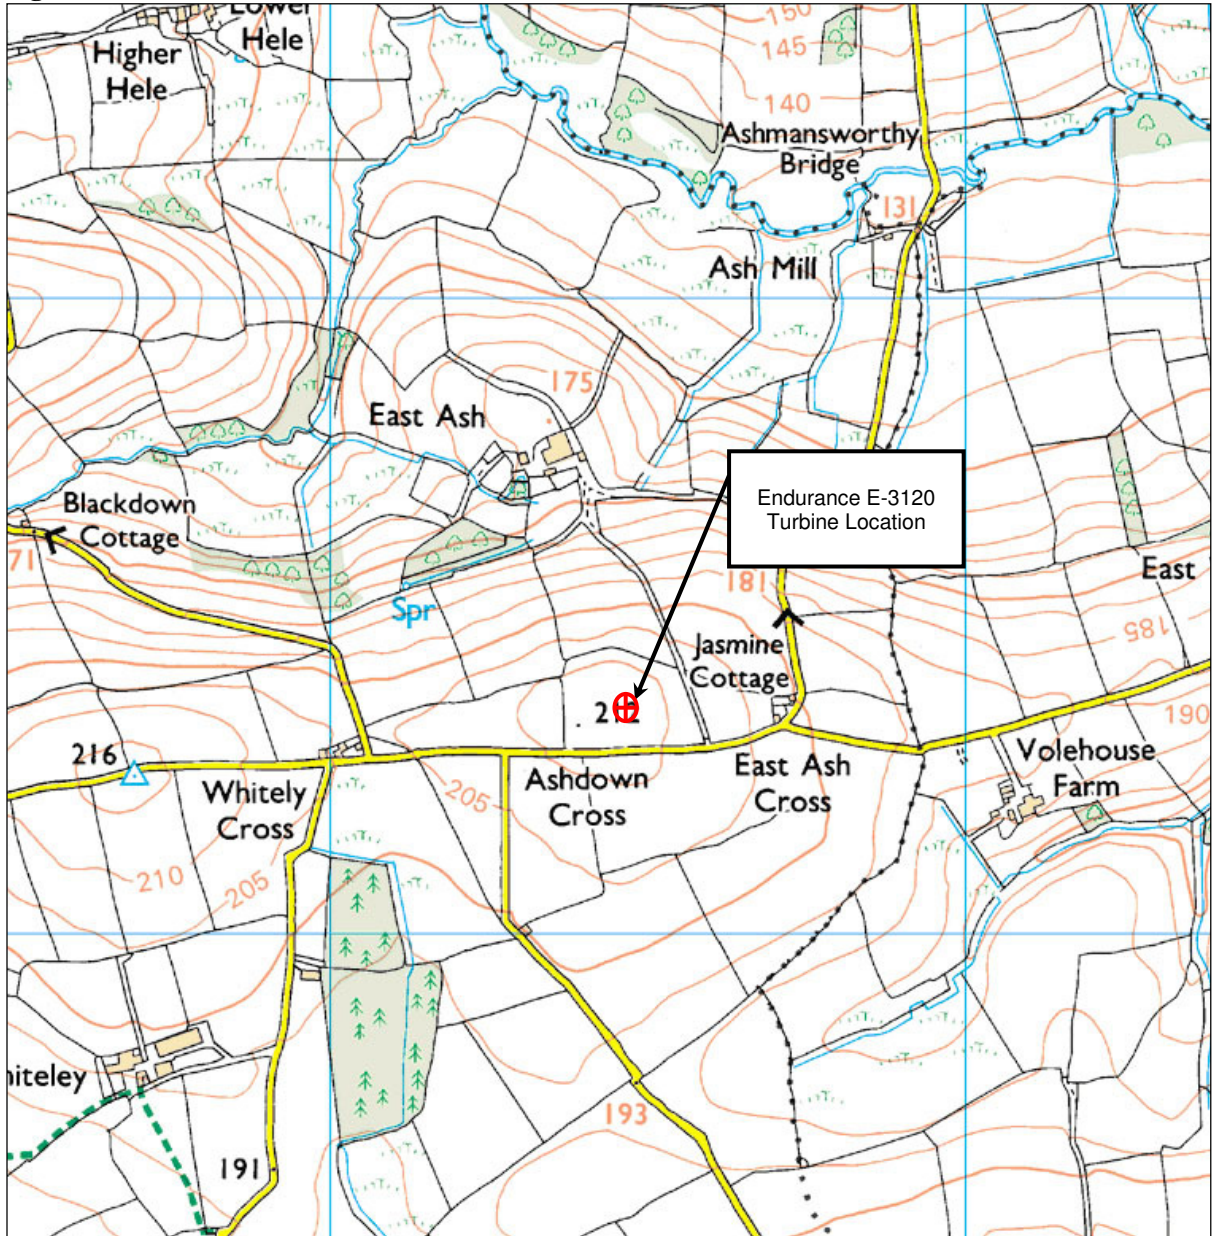

Appendix B

Site Photos

Figure B1 –Photo Showing Turbine and 10m Meteorological Mast



Figure B2 –Photo Showing View of Ground Board from Turbine



Figure B3 –Photo Showing Noise Measurement Location



Figure B4 –Photo Showing Detail of Ground Board Location



Appendix C
Secondary Wind Shield Insertion Loss



TEST REPORT No : MI/04/04

DATE OF ISSUE : 21 September 2004

Page 1 of 6

Measurement of the Insertion Loss of Microphone Windshields

CLIENT: Haynes M^cKenzie Partnership
Lintrathen House
West Dean
Salisbury
SP5 1JL

JOB NUMBER: A04/65


TEST SAMPLE: Double skin tripod mounted and secondary windshields

MANUFACTURER: None specified

DATE RECEIVED: 1 September 2004

DATE OF TEST: 17 September 2004

Signed: 
D J M^cCaul
Laboratory Manager

Approved: 
G Kerry
Technical Manager



THE QUEEN'S
ANNIVERSARY PRIZES
FOR HIGHER AND FURTHER EDUCATION



2000

TEST SAMPLES

Description of Test Samples



Test Ref: MI/04/09/03

Secondary windshield, external diameter 450mm, mounted on a section of plasterboard with dimensions: 480mm x 480mm x 12.5mm and weighing 2.5kg.

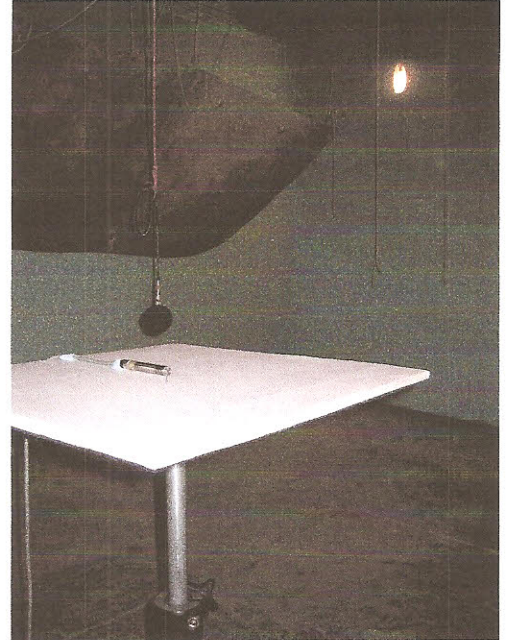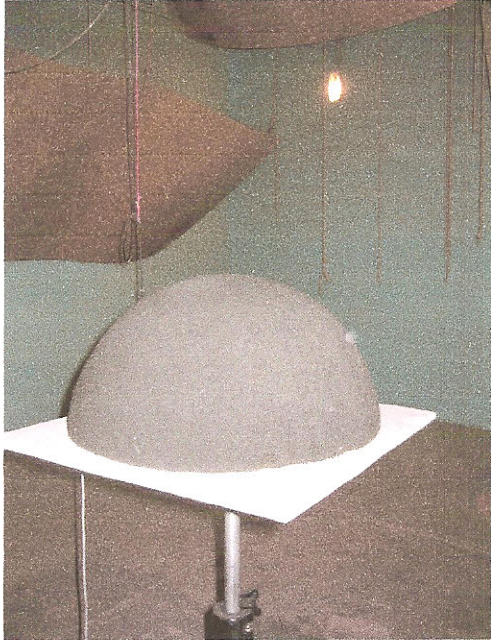

Test Ref: MI/04/09/04

Double skin tripod mounted windshield, external diameter 120mm.

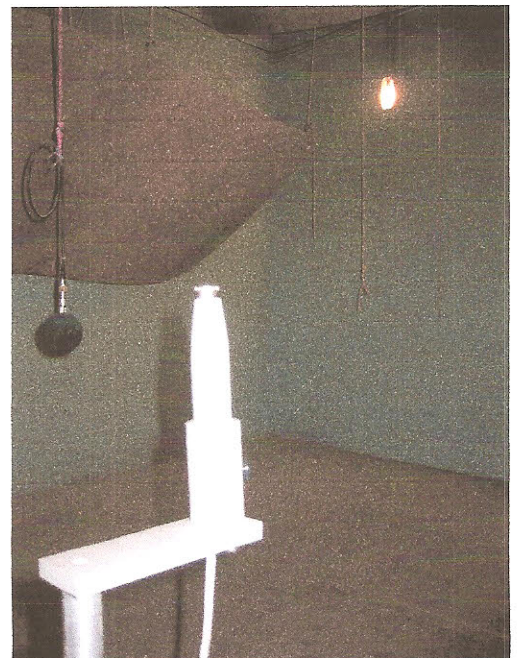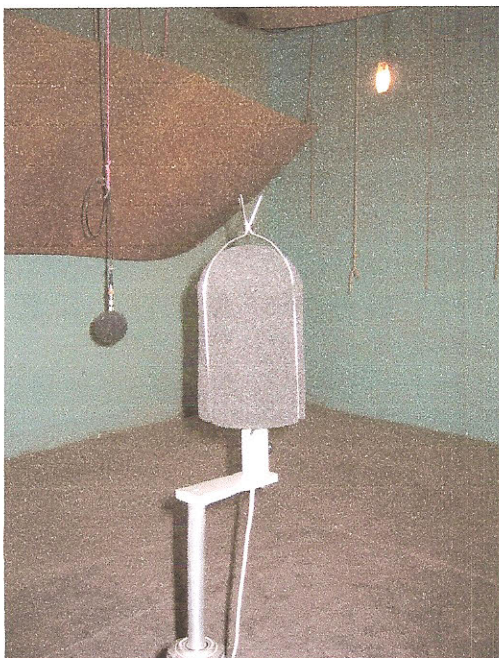

DESCRIPTION OF TEST PROCEDURE

Description of Test Facility

The tests were carried out in the large reverberation room at the University of Salford. The room has been designed with hard surfaces and non-parallel walls to give long empty room reverberation times with uniform decays. It has the shape of a truncated wedge. In addition 11 plywood panels, each panel 1.22m x 2.44m, were hung in the room to improve the diffusivity of the sound field. The test sample was placed in the centre of the room and >1100mm above the floor of the room. The excitation signal comprised wide band random noise played into the room via a loudspeaker system mounted in a cabinet facing a corner. The room is 7.4m long x ~6.6m wide x 4.5m high. It has a volume of 225m³ and a total surface area of 243m².

Test Procedure

Measurements were made over a frequency range of 20Hz to 20,000Hz in one-third octave bands with and without the test object in place. Measurements were carried out consecutively to avoid significant changes in relative humidity and temperature that influence air absorption at higher frequencies. The measurement period was 60 seconds. The insertion loss of the test object was determined by subtracting the level with the test object in place from the level without the test object in place:

$$\text{insertion loss} = \text{unoccluded} - \text{occluded} \quad (\text{dB})$$

A total of 12 measurements for each situation were taken, six each for two loudspeaker positions. These were then averaged.

3 EQUIPMENT

| Item | Departmental Record No. |
|---|------------------------------------|
| Norwegian Electronics 1/3 octave band real time analyser type 840 with in-built random noise generator | RTA2 |
| Quad 510 power amplifier | PA7 |
| Bruel &Kjaer microphone power supply type 2804 | 1848095 |
| 2 off broadband loudspeakers | LS3 & LS4 |
| 1 off G.R.A.S. random incidence condenser microphones type 40AP in the receiving room | M16 |
| 1 off Norsonic Multiplexer type 834A | MP2 |
| HP Brio Pentium personal computer and related peripheral equipment (printer, plotter, monitor etc.) | COM6 |
| Yamaha GQ1031BII graphic equalizer | GEQ1 |



RESULTS

The insertion loss values at one third octave band intervals are given in the tables overleaf.

| | MI/04/09/03 | MI/04/09/04 |
|--|-------------|-------------|
| Temperature in reverberation room °C: | 22.5 | 22.6 |
| Relative humidity in reverberation room %: | 46.6 | 46.2 |

The results here presented relate only to the items tested and described in this report.

| 1/3 OBCF (Hz) | MI/04/09/03 | | | MI/04/09/04 | | |
|---------------------|---------------|-------------|------------------------|---------------|-------------|------------------------|
| | unocc (dB) | occ (dB) | insertion loss (dB) | unocc (dB) | occ (dB) | insertion loss (dB) |
| 20 | 53.6 | 53.5 | 0.1 | 53.1 | 53.0 | 0.1 |
| 25 | 60.2 | 60.3 | -0.1 | 59.5 | 59.3 | 0.2 |
| 31.5 | 74.4 | 74.5 | -0.1 | 75.1 | 74.9 | 0.2 |
| 40 | 79.6 | 79.7 | -0.1 | 80.1 | 79.9 | 0.2 |
| 50 | 79.5 | 79.8 | -0.3 | 79.7 | 79.5 | 0.2 |
| 63 | 80.8 | 80.7 | 0.1 | 81.2 | 81.3 | -0.1 |
| 80 | 78.4 | 78.3 | 0.1 | 78.7 | 78.6 | 0.1 |
| 100 | 85.8 | 85.7 | 0.1 | 85.3 | 85.3 | 0.0 |
| 125 | 88.9 | 89.0 | -0.1 | 87.7 | 87.7 | 0.0 |
| 160 | 86.0 | 86.1 | -0.1 | 85.3 | 85.3 | 0.0 |
| 200 | 85.8 | 85.8 | 0.0 | 85.6 | 85.7 | -0.1 |
| 250 | 87.7 | 87.7 | 0.0 | 86.3 | 86.3 | 0.0 |
| 315 | 88.7 | 88.9 | -0.2 | 86.1 | 86.2 | -0.1 |
| 400 | 89.1 | 89.2 | -0.1 | 85.6 | 85.6 | 0.0 |
| 500 | 90.2 | 90.1 | 0.1 | 86.9 | 86.9 | 0.0 |
| 630 | 89.4 | 89.0 | 0.4 | 86.5 | 86.6 | -0.1 |
| 800 | 88.1 | 87.4 | 0.7 | 85.4 | 85.5 | -0.1 |
| 1000 | 88.6 | 87.7 | 0.9 | 85.9 | 86.2 | -0.3 |
| 1250 | 88.8 | 88.5 | 0.3 | 86.1 | 86.4 | -0.3 |
| 1600 | 88.7 | 88.3 | 0.4 | 86.1 | 86.3 | -0.2 |
| 2000 | 89.5 | 88.6 | 0.9 | 86.7 | 86.7 | 0.0 |
| 2500 | 89.2 | 88.6 | 0.6 | 86.7 | 86.3 | 0.4 |
| 3150 | 87.9 | 87.1 | 0.8 | 85.9 | 85.1 | 0.8 |
| 4000 | 88.9 | 88.2 | 0.7 | 86.2 | 85.3 | 0.9 |
| 5000 | 89.1 | 88.1 | 1.0 | 86.5 | 85.5 | 1.0 |
| 6300 | 73.1 | 72.1 | 1.0 | 70.8 | 69.5 | 1.3 |
| 8000 | 63.1 | 62.0 | 1.1 | 60.9 | 59.7 | 1.2 |
| 10000 | 61.2 | 60.1 | 1.1 | 59.4 | 58.1 | 1.3 |
| 12500 | 59.7 | 58.5 | 1.2 | 58.4 | 56.4 | 2.0 |
| 16000 | 53.8 | 52.4 | 1.4 | 51.4 | 49.6 | 1.8 |
| 20000 | 44.4 | 43.0 | 1.4 | 40.3 | 38.7 | 1.6 |

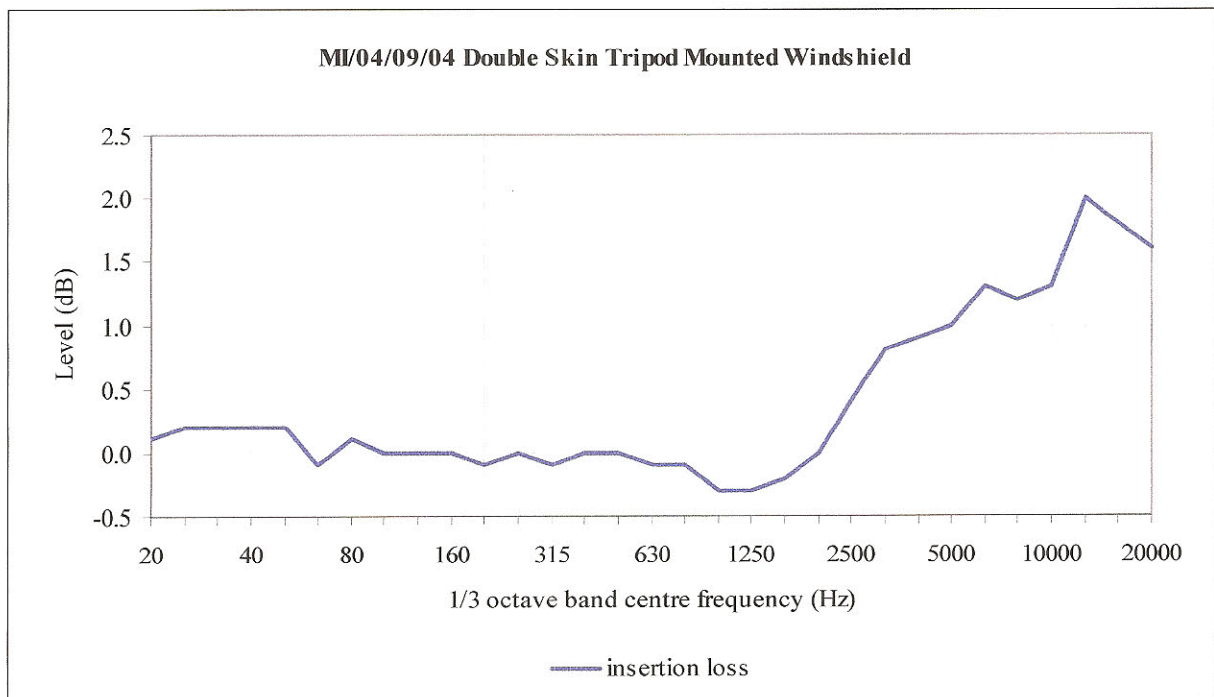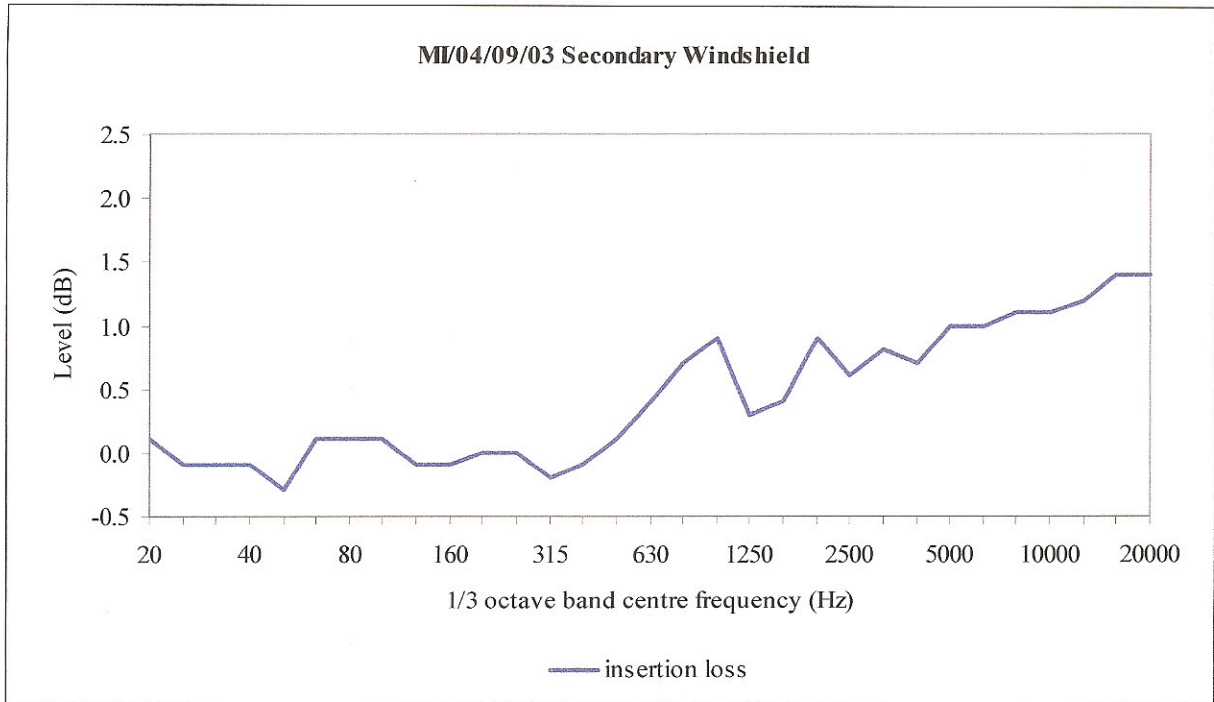


Appendix D
Measured Turbine and Background Data

Endurance E-3120 - Noise Measurements


Measured Turbine and Background Noise Levels

1st and 2nd February 2011

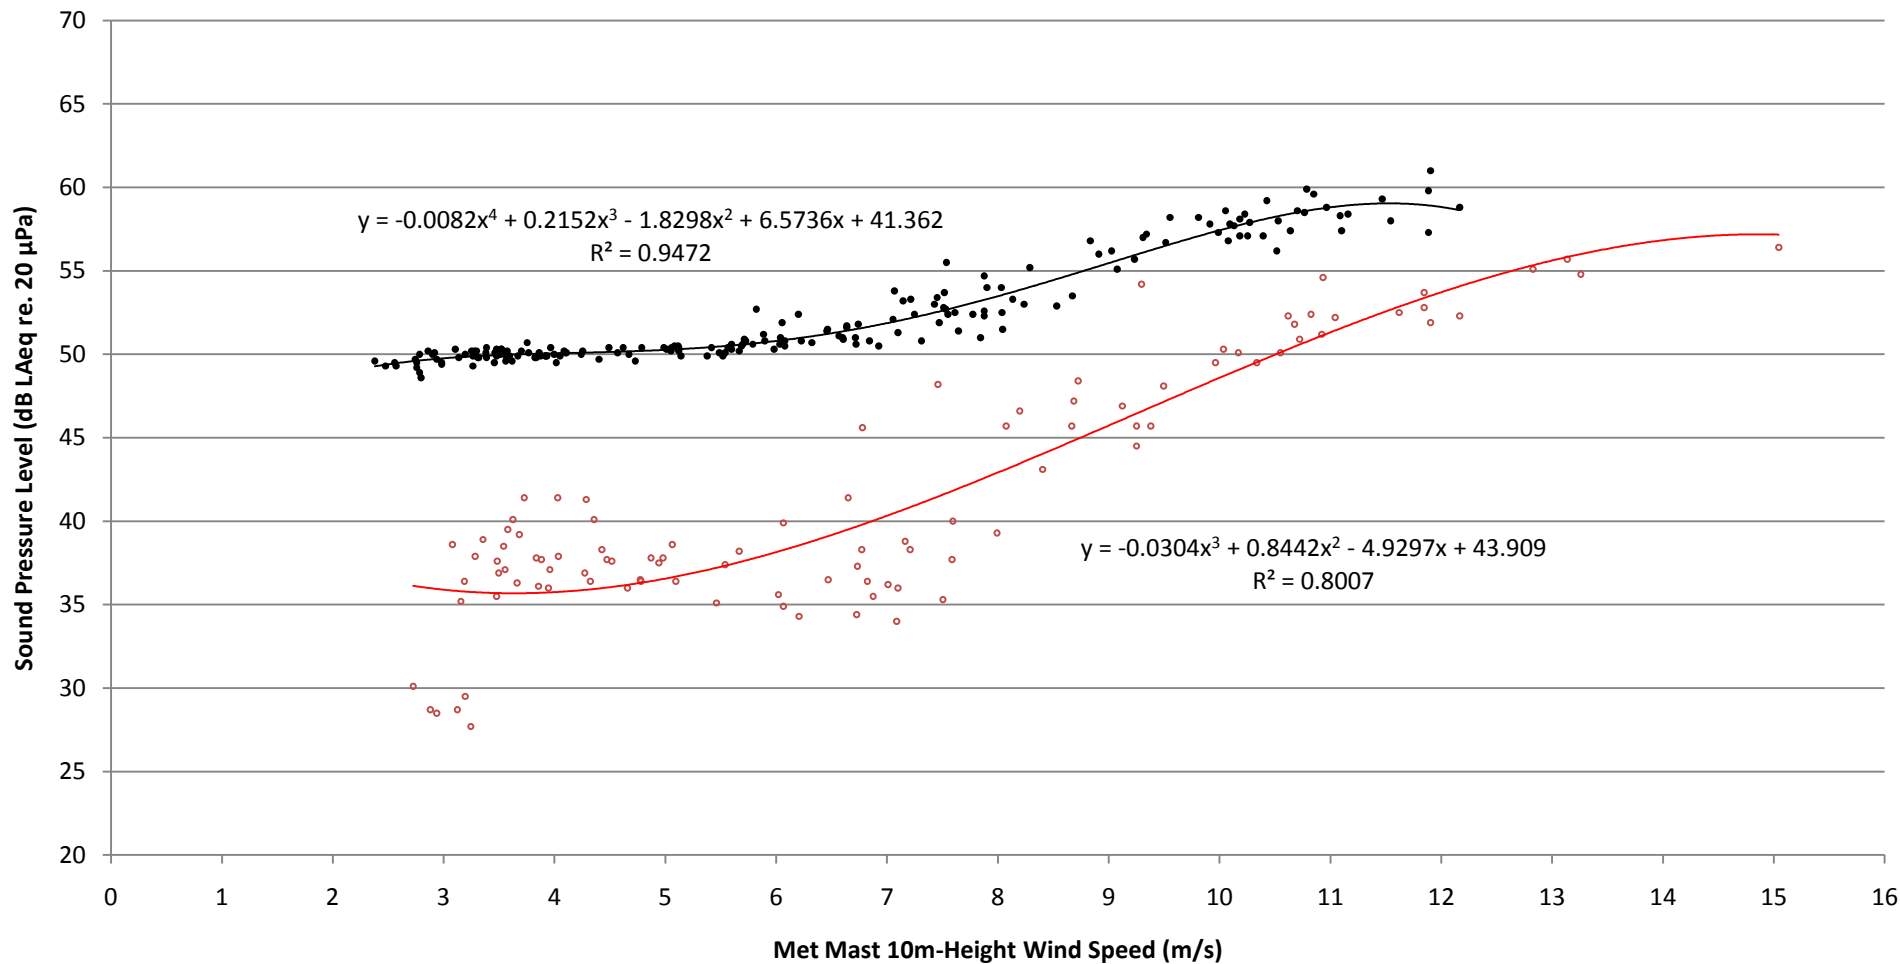

- Background Noise Data (dB LAeq)
- Turbine Operational Noise Data (dB LAeq)
- Poly. (Background Noise Data (dB LAeq))
- Poly. (Turbine Operational Noise Data (dB LAeq))

Endurance E-3120 - Noise Measurements
Measured Turbine Noise Levels Plotted against Electrical Power Output
1st and 2nd February 2011

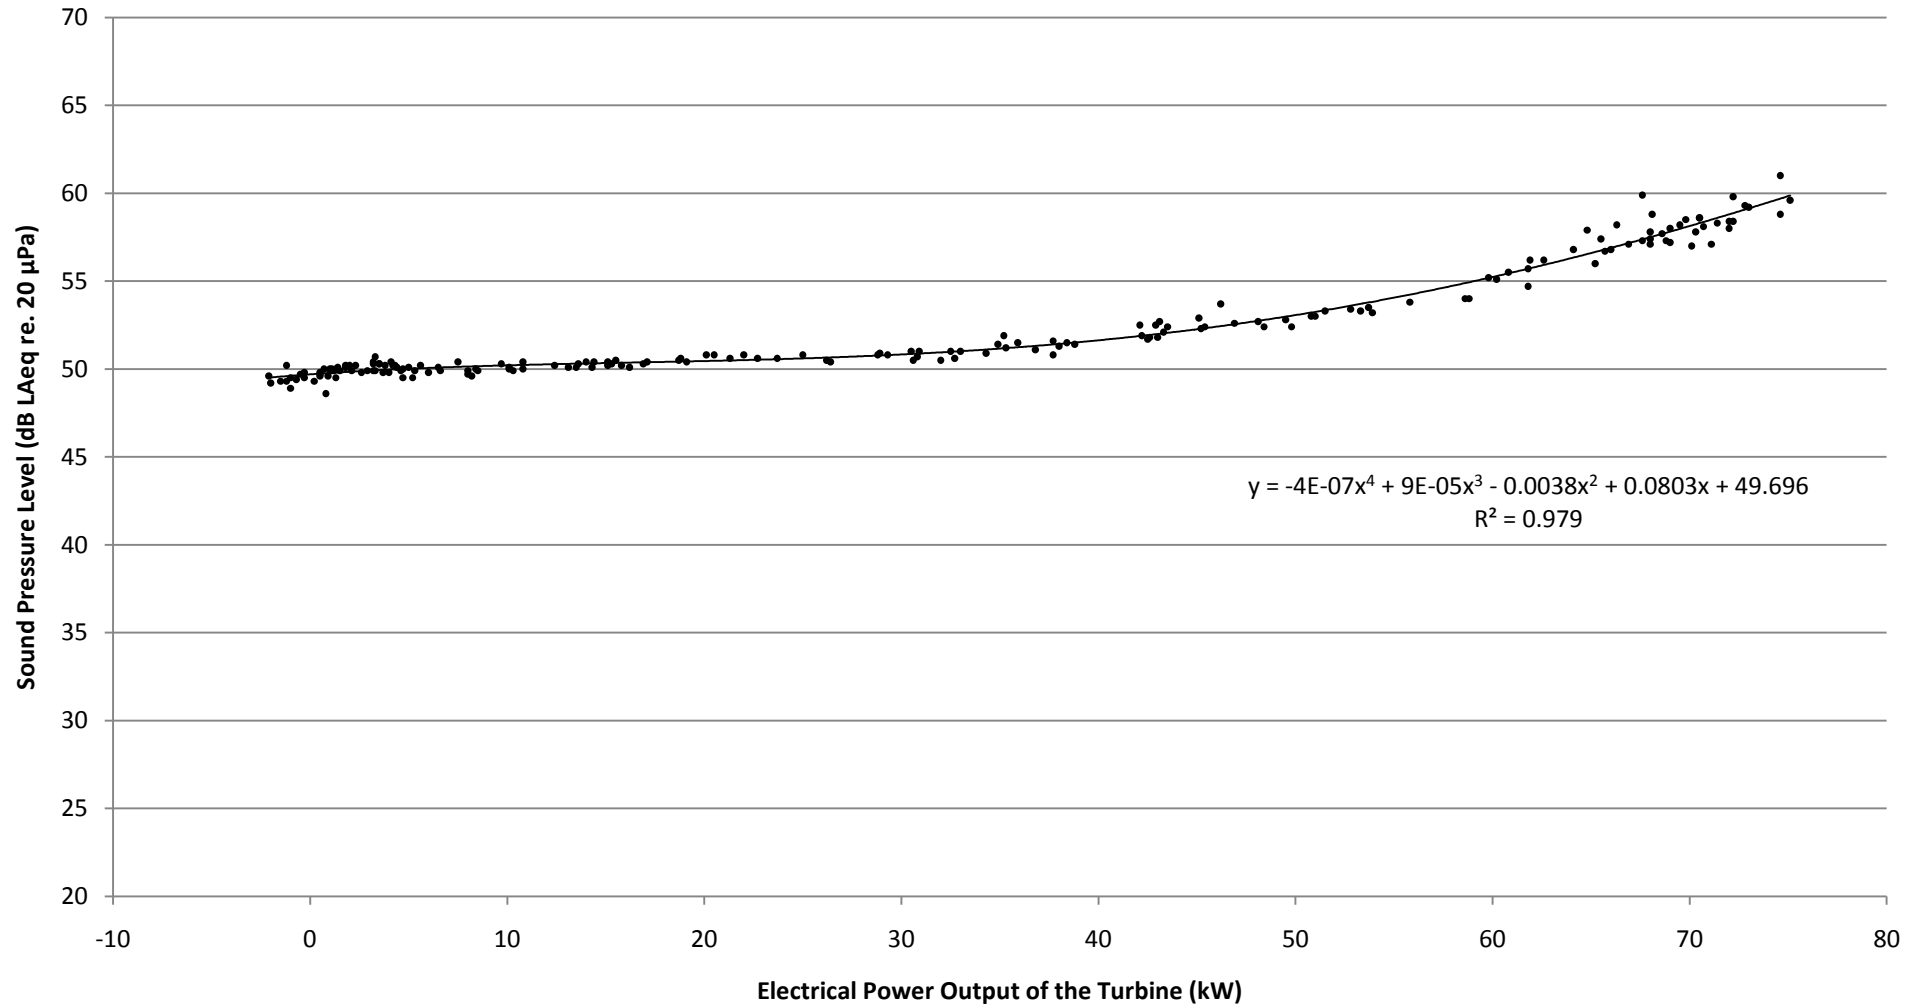

• Turbine Operational Noise Data (dB LAeq) — Poly. (Turbine Operational Noise Data (dB LAeq))


Appendix E

Calculation of Sound Power Level

Endurance E-3120 - Noise Measurements

Calculated Sound Power Levels

1st and 2nd February 2011

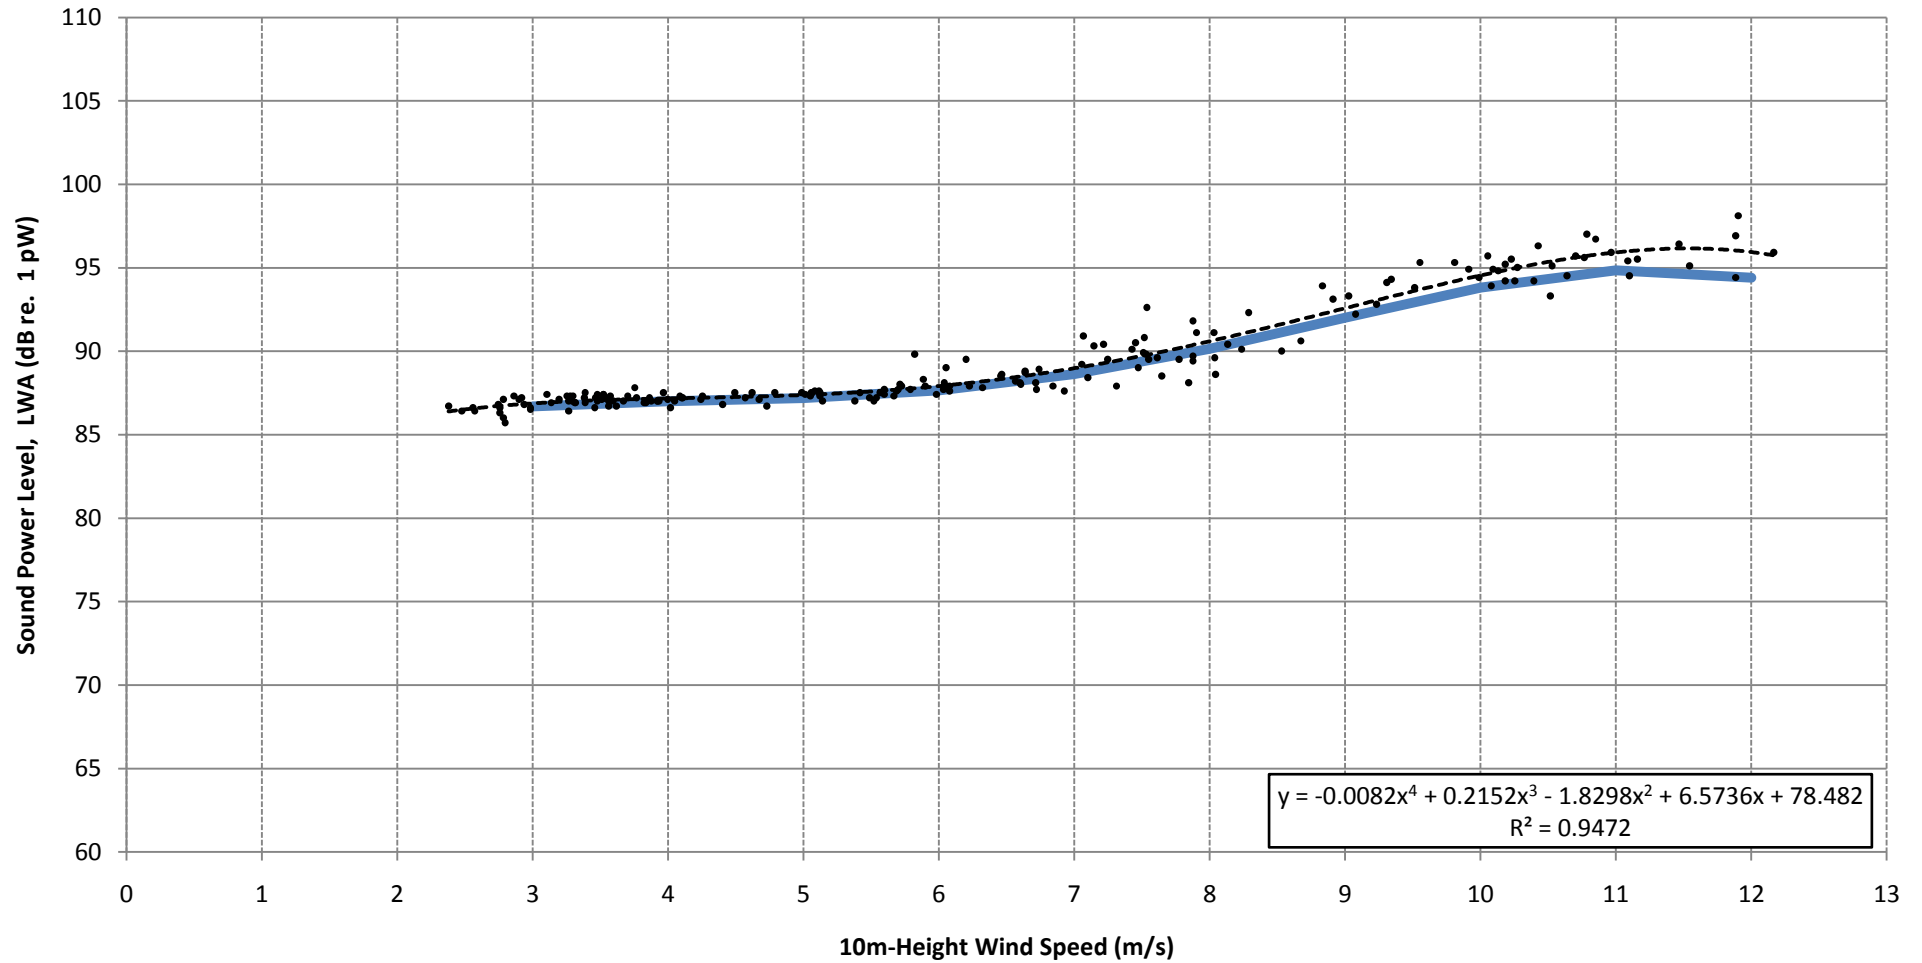



- Turbine Operational Sound Power Levels (dB LWA)
- Background Corrected Sound Power Level
- - - - Turbine Operational 4th Order Polynomial Regression Line

Appendix F
Measured One Third Octave Levels

Endurance E-3120 Wind Turbine Wind Speed - 3 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 0.6 | | -10.0 | |
| 25 | 5.4 | 15.7 | -2.8 | 13.5 |
| 31.5 | 8.8 | | 9.4 | |
| 40 | 14.2 | | 11.1 | |
| 50 | 20.0 | 27.2 | 12.5 | 23.1 |
| 63 | 23.7 | | 17.8 | |
| 80 | 22.8 | | 21.0 | |
| 100 | 27.1 | 34.5 | 23.8 | 31.6 |
| 125 | 29.9 | | 27.3 | |
| 160 | 31.3 | | 28.3 | |
| 200 | 33.2 | 43.2 | 24.5 | 31.2 |
| 250 | 37.6 | | 27.4 | |
| 315 | 41.2 | | 26.8 | |
| 400 | 35.1 | 42.3 | 23.1 | 25.7 |
| 500 | 36.5 | | 19.9 | |
| 630 | 39.6 | | 18.6 | |
| 800 | 40.3 | 47.0 | 16.6 | 22.0 |
| 1000 | 44.3 | | 16.3 | |
| 1250 | 40.9 | | 18.4 | |
| 1600 | 37.6 | 40.5 | 17.5 | 23.4 |
| 2000 | 36.0 | | 18.6 | |
| 2500 | 31.6 | | 19.6 | |
| 3150 | 28.7 | 32.9 | 18.7 | 21.4 |
| 4000 | 28.9 | | 16.4 | |
| 5000 | 26.5 | | 13.1 | |
| 6300 | 20.6 | 22.3 | 9.8 | 13.3 |
| 8000 | 16.4 | | 9.2 | |
| 10000 | 10.7 | | 5.5 | |
| Overall | 50.2 | | 35.9 | |

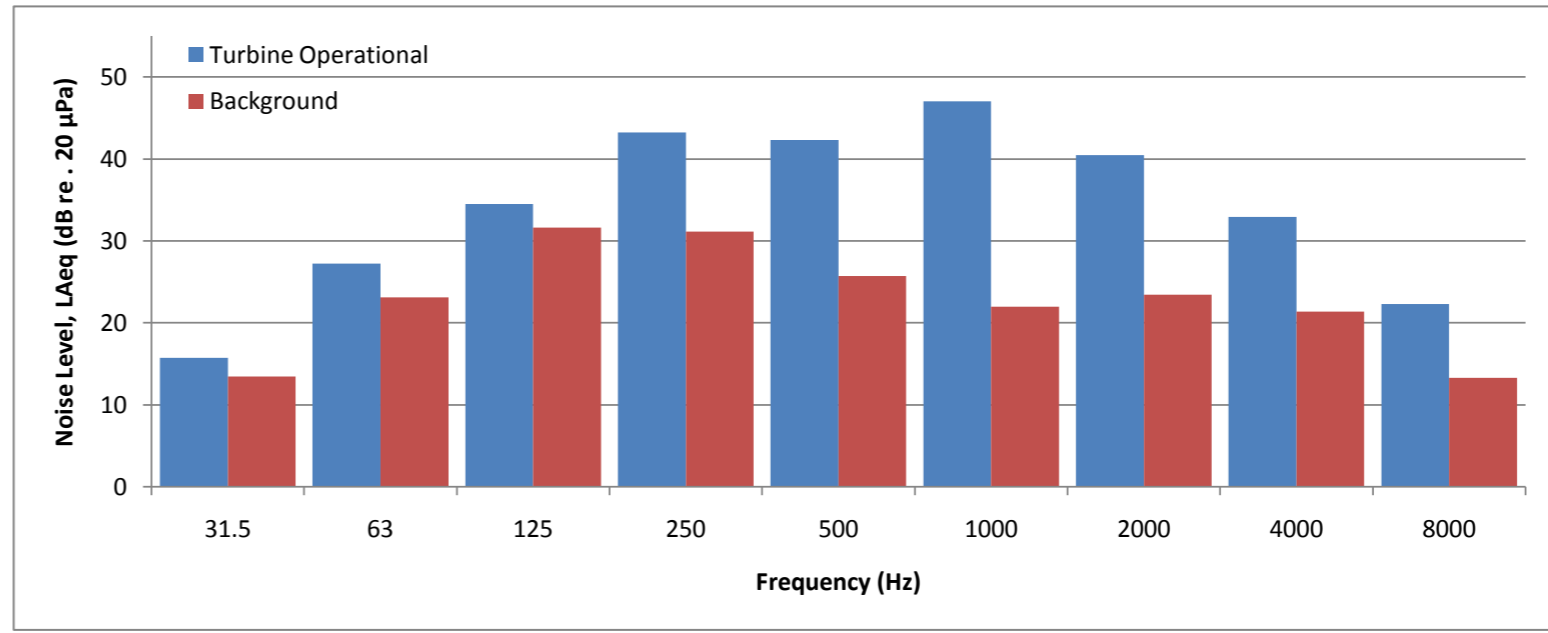
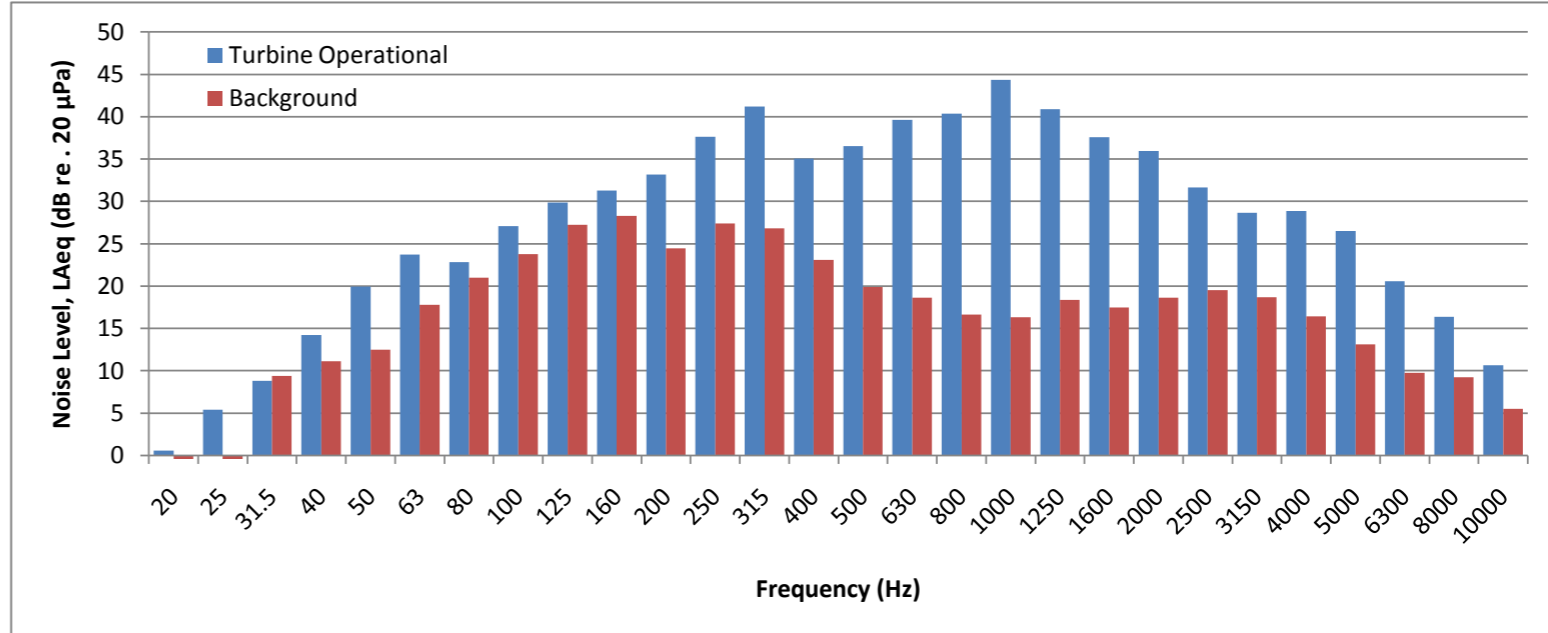


HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 4 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 4.2 | | -9.0 | |
| 25 | 8.1 | 17.2 | -1.1 | 12.2 |
| 31.5 | 10.6 | | 6.8 | |
| 40 | 15.4 | | 10.5 | |
| 50 | 19.8 | 28.7 | 17.6 | 27.6 |
| 63 | 24.7 | | 23.1 | |
| 80 | 25.4 | | 25.0 | |
| 100 | 28.5 | 35.7 | 26.1 | 31.3 |
| 125 | 30.8 | | 25.9 | |
| 160 | 32.6 | | 27.4 | |
| 200 | 32.7 | 44.4 | 28.8 | 34.6 |
| 250 | 38.2 | | 30.1 | |
| 315 | 42.8 | | 30.5 | |
| 400 | 35.9 | 42.8 | 30.4 | 32.9 |
| 500 | 37.2 | | 27.3 | |
| 630 | 40.0 | | 24.8 | |
| 800 | 40.1 | 46.4 | 21.6 | 27.5 |
| 1000 | 43.3 | | 21.7 | |
| 1250 | 41.0 | | 24.3 | |
| 1600 | 38.0 | 41.5 | 21.5 | 26.5 |
| 2000 | 36.7 | | 22.6 | |
| 2500 | 34.8 | | 20.8 | |
| 3150 | 30.4 | 34.1 | 18.3 | 20.2 |
| 4000 | 29.6 | | 14.1 | |
| 5000 | 27.3 | | 10.8 | |
| 6300 | 21.5 | 23.1 | 8.3 | 12.2 |
| 8000 | 17.0 | | 8.0 | |
| 10000 | 11.0 | | 5.5 | |
| Overall | 50.5 | | 39.0 | |

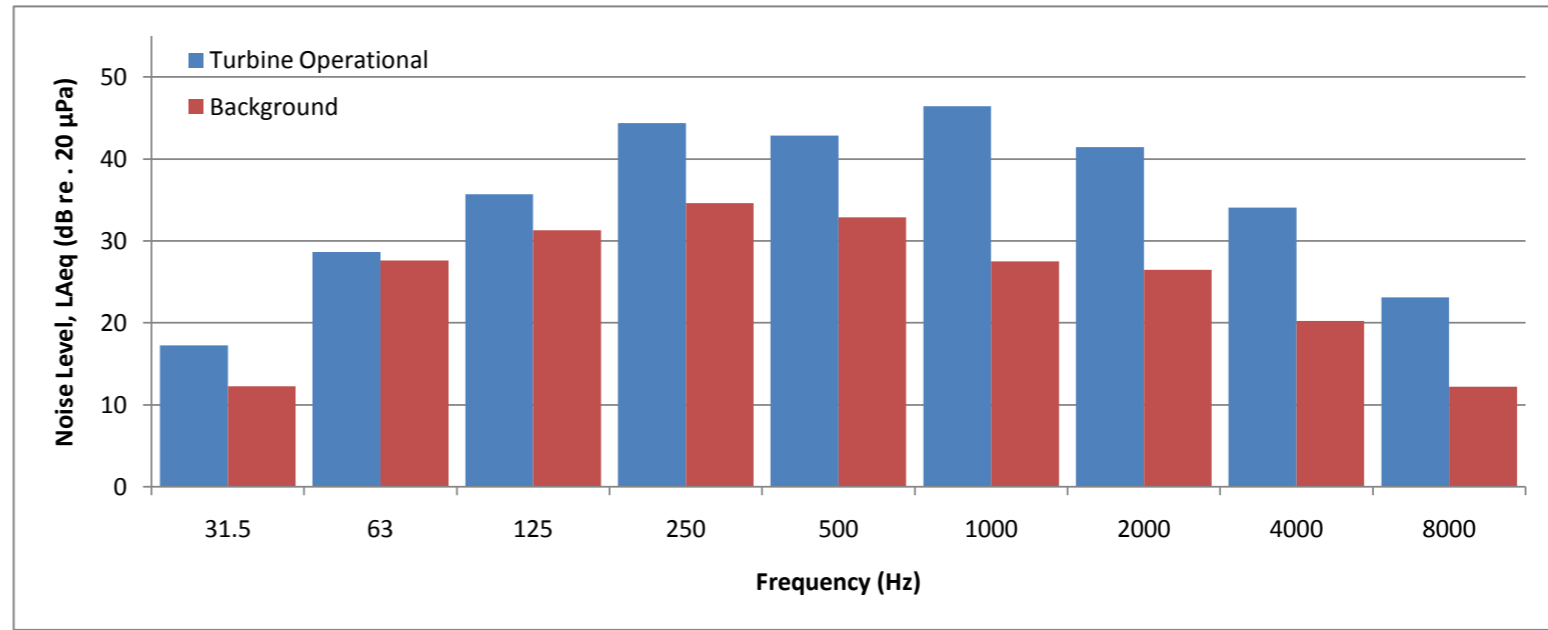
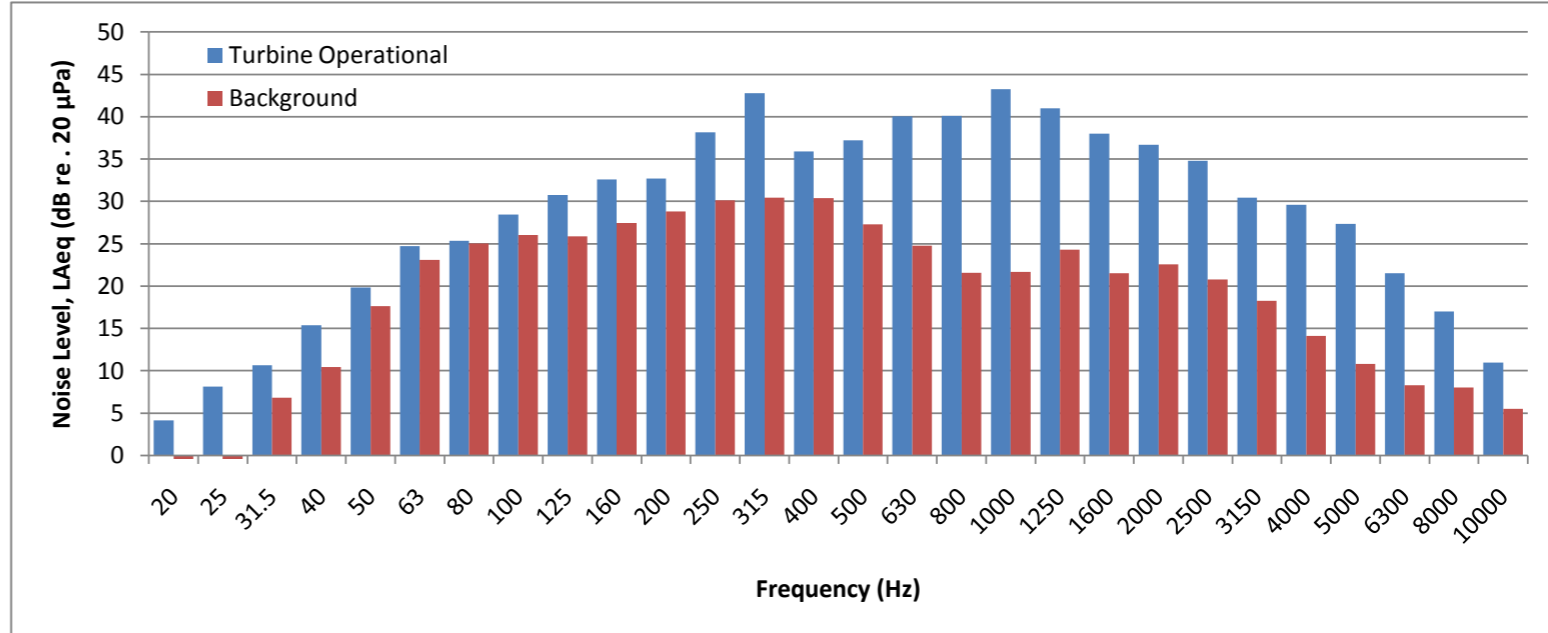


HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 5 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 4.8 | | -10.8 | |
| 25 | 8.5 | | -4.6 | |
| 31.5 | 12.4 | 18.8 | 6.6 | 10.2 |
| 40 | 17.1 | | 7.5 | |
| 50 | 21.3 | 30.6 | 12.6 | 27.0 |
| 63 | 26.0 | | 21.0 | |
| 80 | 27.9 | | 25.5 | |
| 100 | 31.2 | 37.6 | 27.3 | 30.9 |
| 125 | 33.2 | | 23.9 | |
| 160 | 33.6 | | 26.4 | |
| 200 | 33.4 | | 23.8 | |
| 250 | 36.9 | 43.4 | 28.1 | 32.0 |
| 315 | 41.7 | | 28.4 | |
| 400 | 36.9 | 43.6 | 26.9 | 29.5 |
| 500 | 37.7 | | 23.1 | |
| 630 | 40.8 | | 22.9 | |
| 800 | 40.1 | 46.3 | 23.8 | 27.6 |
| 1000 | 43.0 | | 22.0 | |
| 1250 | 41.0 | 43.2 | 22.6 | 27.0 |
| 1600 | 39.0 | | 21.7 | |
| 2000 | 38.4 | | 22.9 | |
| 2500 | 37.7 | 36.5 | 21.8 | 21.8 |
| 3150 | 33.3 | | 19.6 | |
| 4000 | 31.9 | | 16.2 | |
| 5000 | 29.0 | | 12.6 | |
| 6300 | 23.4 | 24.8 | 9.1 | 12.6 |
| 8000 | 18.5 | | 8.1 | |
| 10000 | 11.5 | | 5.6 | |
| Overall | 50.8 | | 37.4 | |

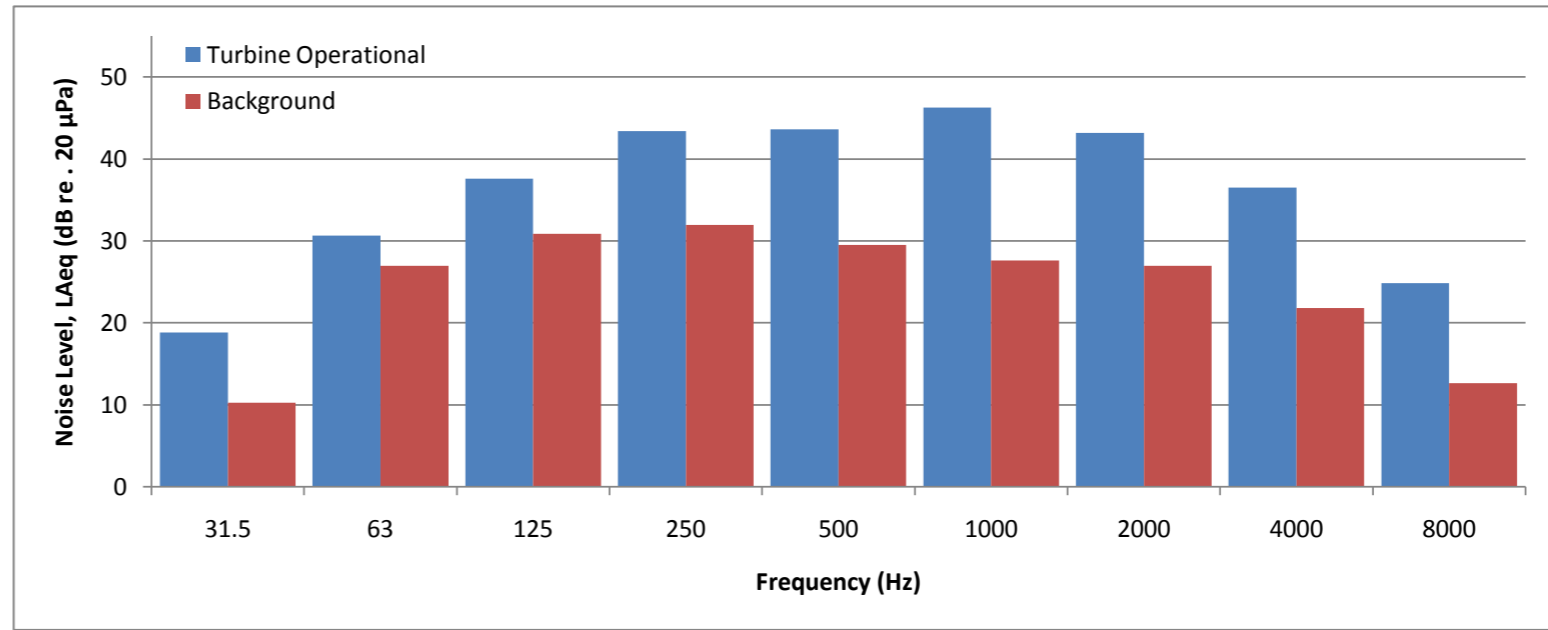
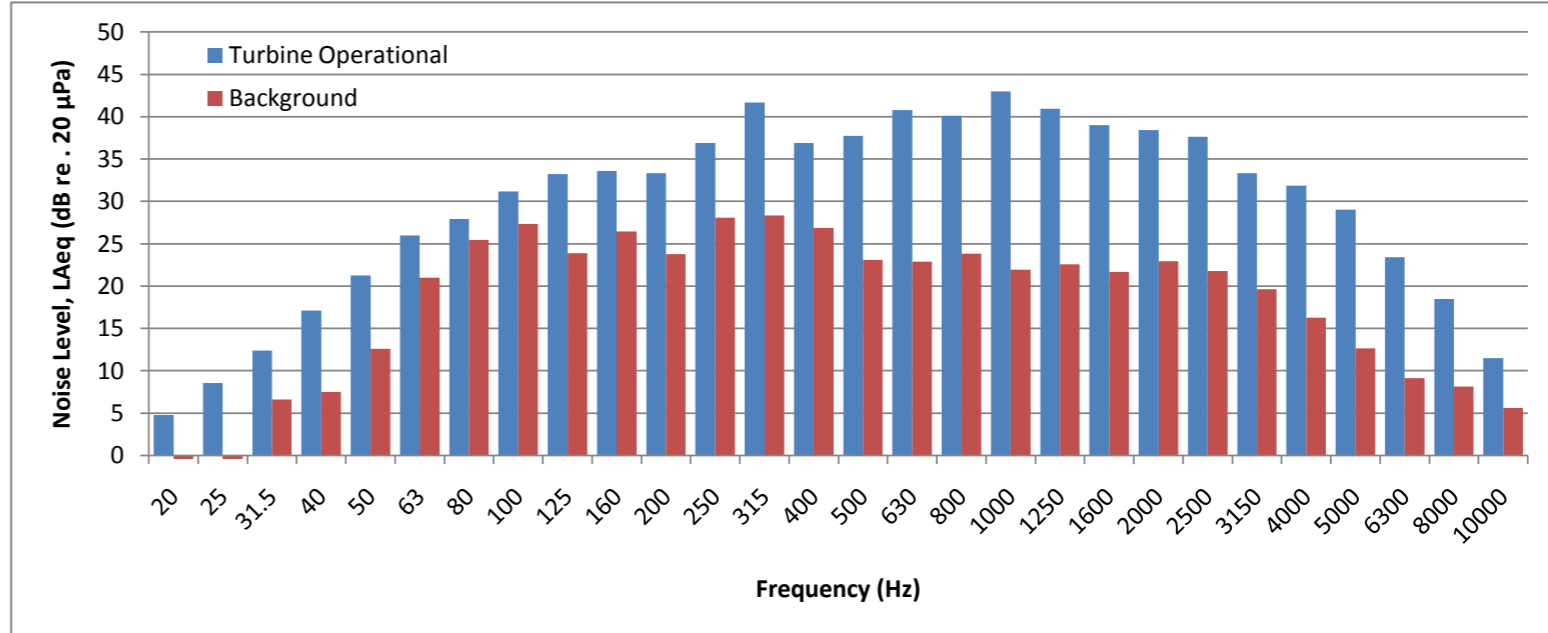


HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 6 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 8.0 | | -12.7 | |
| 25 | 11.9 | | -6.5 | |
| 31.5 | 14.6 | 21.3 | 5.5 | 8.8 |
| 40 | 19.5 | | 5.8 | |
| 50 | 22.4 | 31.4 | 11.2 | 21.5 |
| 63 | 27.3 | | 17.8 | |
| 80 | 28.2 | | 18.3 | |
| 100 | 32.1 | 38.3 | 24.0 | 29.6 |
| 125 | 33.3 | | 24.0 | |
| 160 | 34.8 | | 26.2 | |
| 200 | 35.3 | | 24.0 | |
| 250 | 38.5 | 43.9 | 26.8 | 31.2 |
| 315 | 41.5 | | 27.7 | |
| 400 | 39.1 | 44.5 | 27.0 | 29.8 |
| 500 | 39.1 | | 23.7 | |
| 630 | 40.8 | | 23.6 | |
| 800 | 39.8 | 45.9 | 23.5 | 29.3 |
| 1000 | 42.8 | | 23.2 | |
| 1250 | 40.1 | 44.8 | 26.2 | 27.3 |
| 1600 | 39.7 | | 22.2 | |
| 2000 | 40.2 | | 23.3 | |
| 2500 | 40.3 | | 22.1 | |
| 3150 | 38.0 | 40.5 | 19.3 | 21.3 |
| 4000 | 35.3 | | 15.6 | |
| 5000 | 32.0 | | 11.6 | |
| 6300 | 26.6 | 27.9 | 8.5 | 12.1 |
| 8000 | 21.1 | | 7.7 | |
| 10000 | 14.1 | | 5.0 | |
| Overall | 51.5 | | 36.9 | |

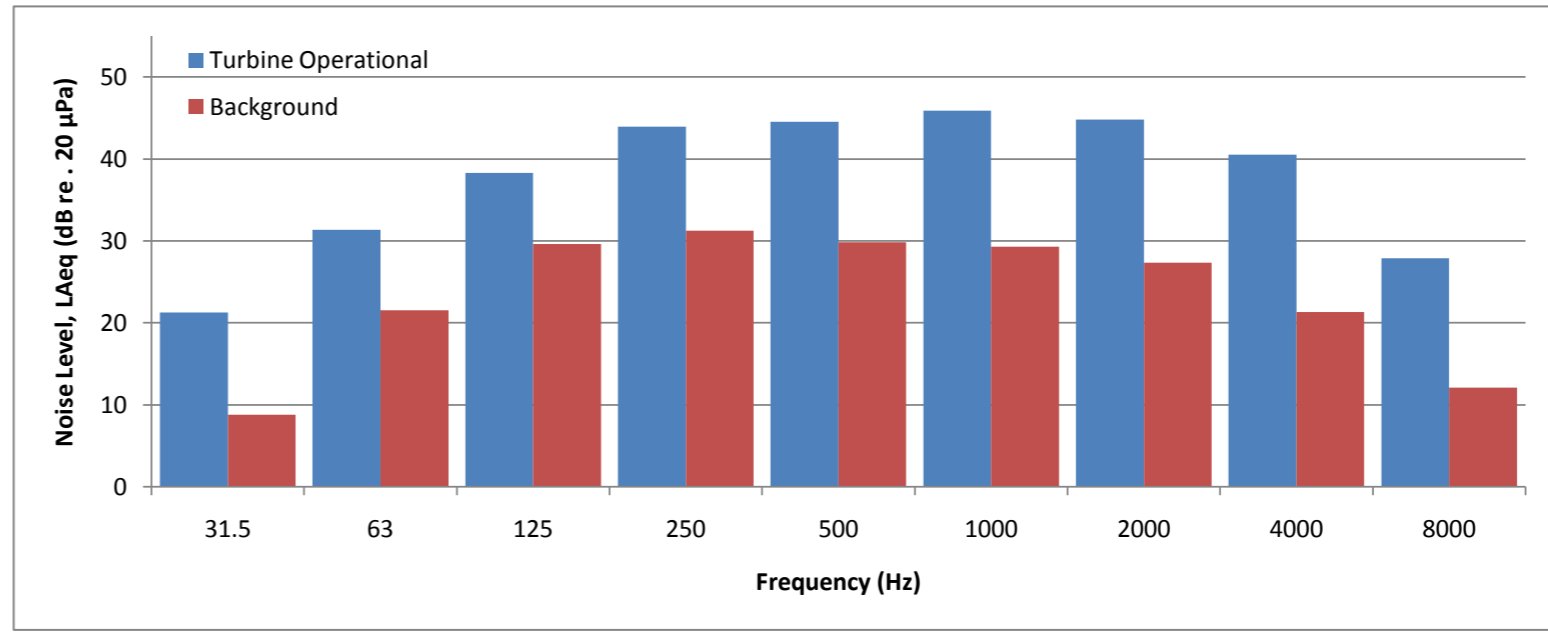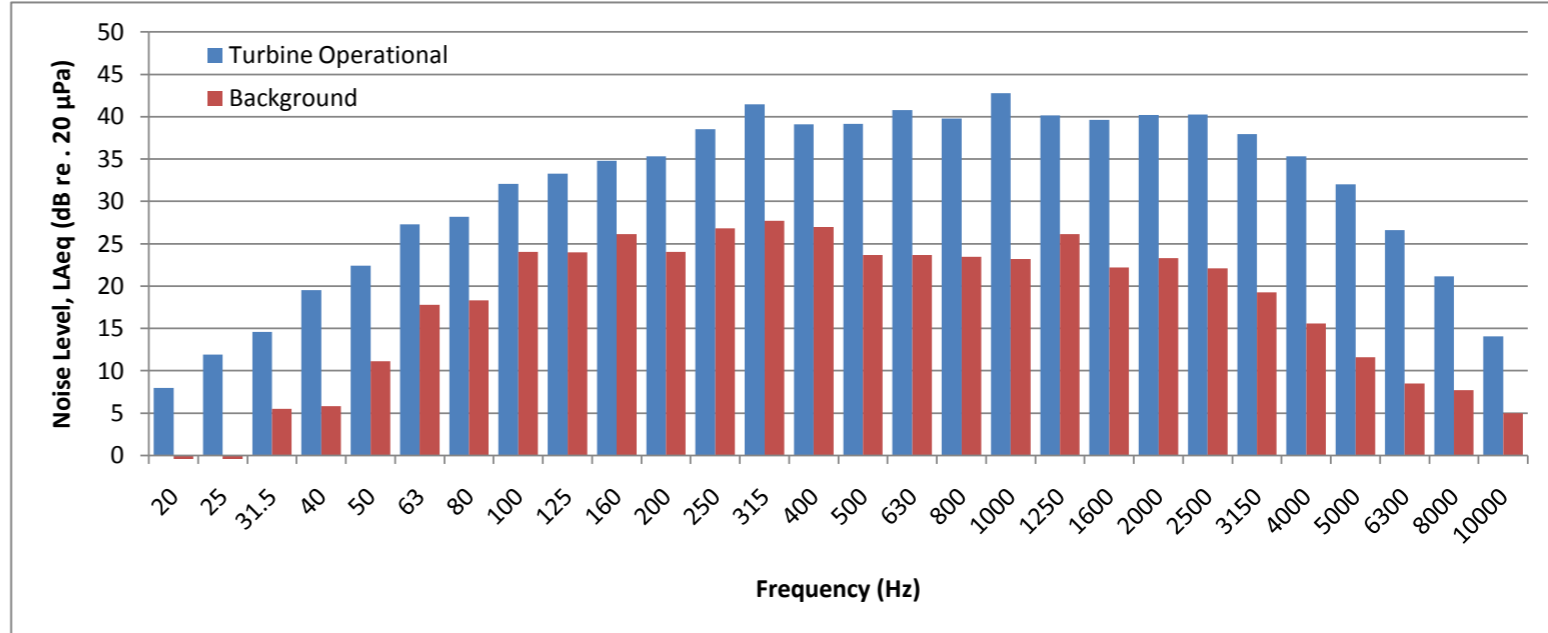

HM:2300/R1



Endurance E-3120 Wind Turbine Wind Speed - 7 m/s



| Frequency (Hz) | Turbine Operational | | Background* | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 9.4 | | -12.7 | |
| 25 | 12.9 | | -6.5 | |
| 31.5 | 16.5 | 22.2 | 5.5 | 8.8 |
| 40 | 20.1 | | 5.8 | |
| 50 | 22.9 | 32.6 | 11.2 | 21.5 |
| 63 | 28.3 | | 17.8 | |
| 80 | 29.8 | | 18.3 | |
| 100 | 33.3 | 40.0 | 24.0 | 29.6 |
| 125 | 35.2 | | 24.0 | |
| 160 | 36.7 | | 26.2 | |
| 200 | 37.7 | | 24.0 | |
| 250 | 40.4 | 45.2 | 26.8 | 31.2 |
| 315 | 42.1 | | 27.7 | |
| 400 | 40.6 | 45.5 | 27.0 | 29.8 |
| 500 | 40.0 | | 23.7 | |
| 630 | 41.5 | | 23.6 | |
| 800 | 39.9 | 46.0 | 23.5 | 29.3 |
| 1000 | 42.4 | | 23.2 | |
| 1250 | 41.1 | | 26.2 | |
| 1600 | 41.6 | 47.5 | 22.2 | 27.3 |
| 2000 | 42.9 | | 23.3 | |
| 2500 | 43.4 | 44.6 | 22.1 | 21.3 |
| 3150 | 42.2 | | 19.3 | |
| 4000 | 39.5 | | 15.6 | |
| 5000 | 35.4 | 31.5 | 11.6 | 12.1 |
| 6300 | 30.5 | | 8.5 | |
| 8000 | 24.0 | | 7.7 | |
| 10000 | 16.6 | | 5.0 | |

| | | |
|---------|------|------|
| Overall | 53.2 | 36.9 |
|---------|------|------|



*Background taken from 6m/s

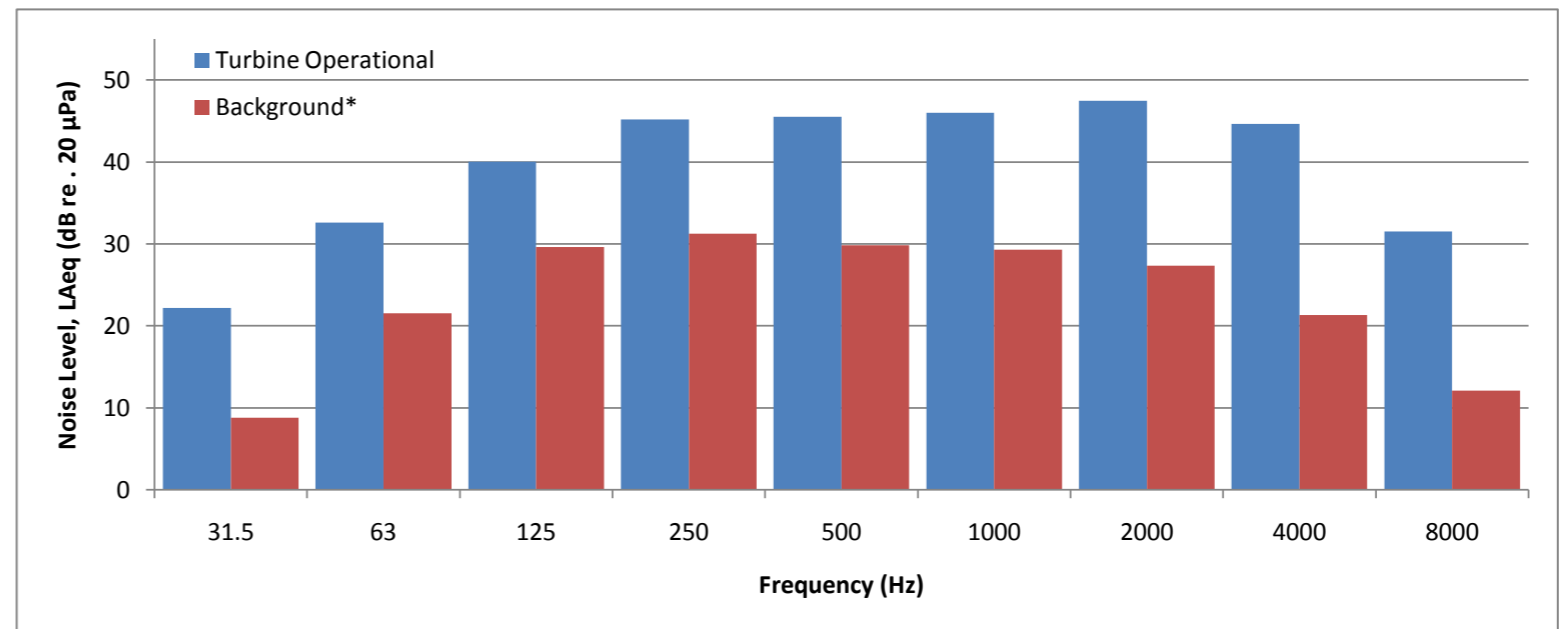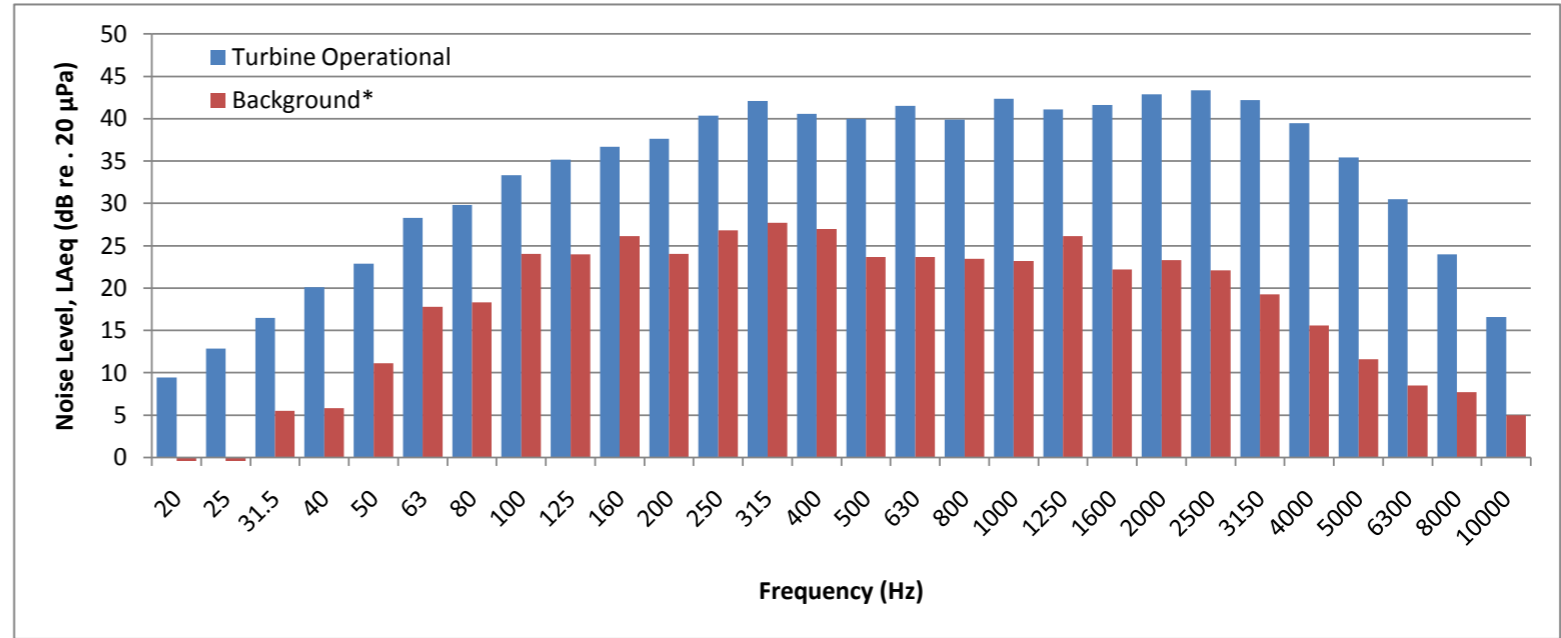

Endurance E-3120 Wind Turbine Wind Speed - 8 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 12.1 | | -1.9 | |
| 25 | 14.5 | | 2.0 | |
| 31.5 | 17.5 | 23.2 | 9.3 | 13.0 |
| 40 | 21.0 | | 10.0 | |
| 50 | 24.1 | 33.8 | 14.1 | 25.0 |
| 63 | 29.0 | | 19.1 | |
| 80 | 31.3 | | 23.2 | |
| 100 | 35.0 | 42.0 | 26.5 | 31.8 |
| 125 | 37.2 | | 26.5 | |
| 160 | 38.8 | | 27.9 | |
| 200 | 39.5 | | 29.2 | |
| 250 | 42.5 | 47.1 | 32.5 | 37.9 |
| 315 | 43.8 | | 35.5 | |
| 400 | 41.6 | 46.3 | 35.3 | 38.7 |
| 500 | 40.9 | | 33.1 | |
| 630 | 42.1 | | 33.1 | |
| 800 | 40.7 | 47.3 | 35.0 | 38.0 |
| 1000 | 43.6 | | 32.7 | |
| 1250 | 42.9 | | 30.8 | |
| 1600 | 43.8 | | 28.9 | |
| 2000 | 45.1 | 49.8 | 27.8 | 32.5 |
| 2500 | 45.9 | | 25.9 | |
| 3150 | 45.0 | 47.4 | 23.6 | 26.2 |
| 4000 | 42.3 | | 20.7 | |
| 5000 | 38.3 | | 18.7 | |
| 6300 | 33.5 | 34.5 | 16.4 | 19.2 |
| 8000 | 27.0 | | 14.2 | |
| 10000 | 19.7 | | 11.3 | |
| Overall | 55.1 | | 43.8 | |

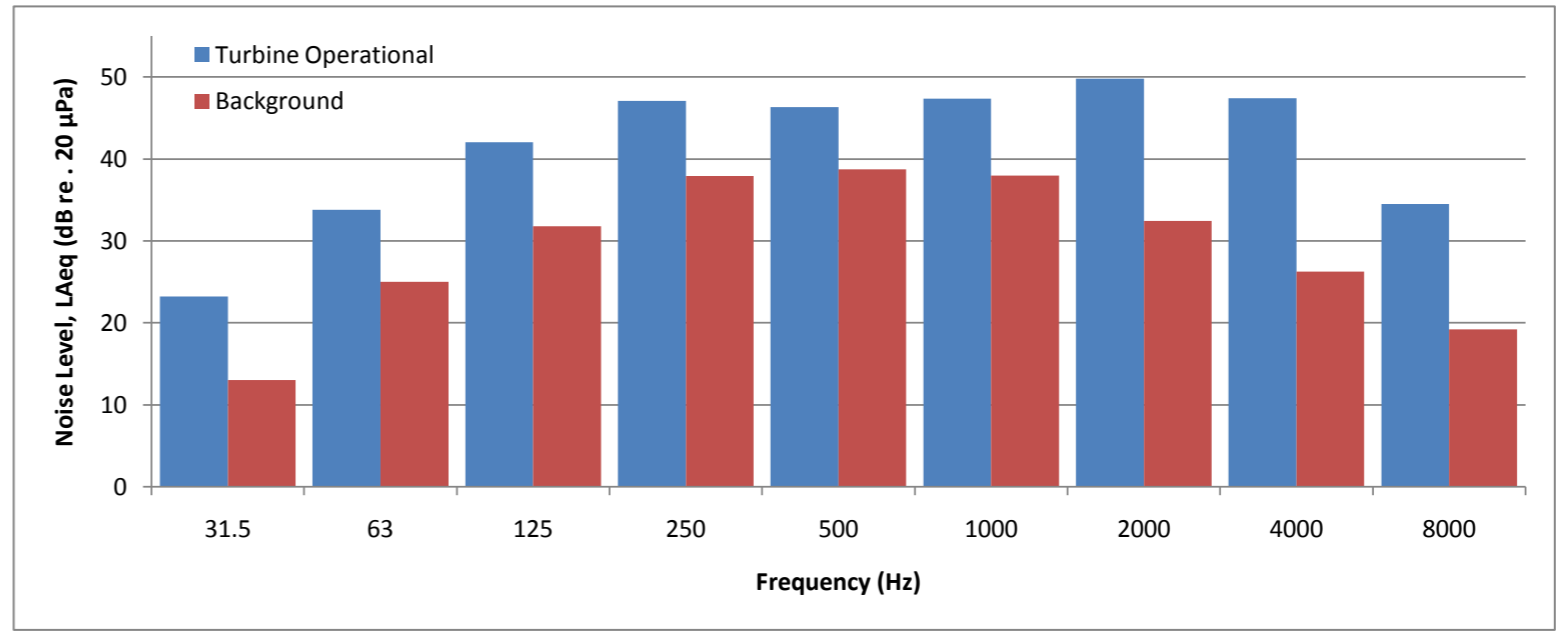
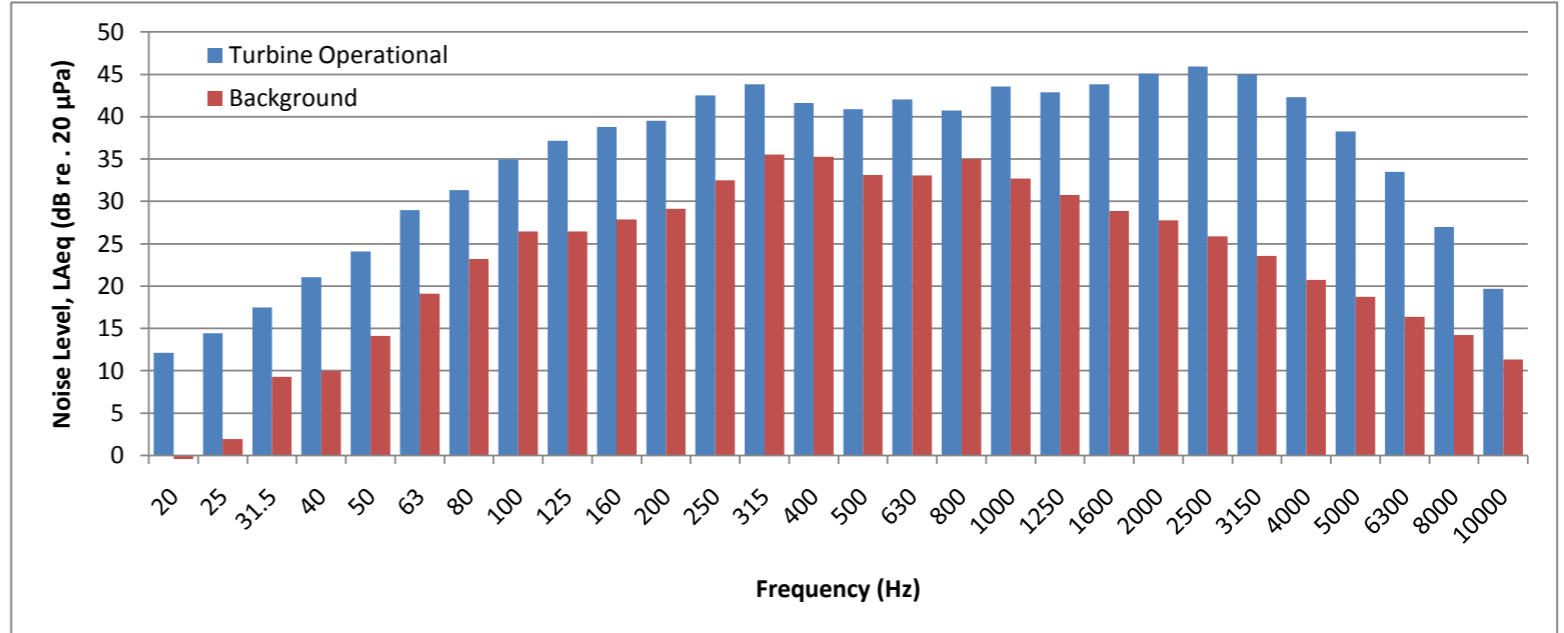


HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 9 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 12.9 | | 3.3 | |
| 25 | 15.5 | | 6.3 | |
| 31.5 | 18.7 | 24.7 | 10.9 | 16.2 |
| 40 | 22.7 | | 14.0 | |
| 50 | 25.7 | 34.8 | 16.3 | 28.7 |
| 63 | 29.8 | | 22.6 | |
| 80 | 32.2 | | 27.1 | |
| 100 | 35.9 | 42.6 | 29.1 | 34.6 |
| 125 | 37.8 | | 29.5 | |
| 160 | 39.1 | | 30.6 | |
| 200 | 40.0 | 47.6 | 31.9 | 40.8 |
| 250 | 42.9 | | 35.2 | |
| 315 | 44.5 | | 38.5 | |
| 400 | 42.3 | 46.8 | 39.5 | 42.9 |
| 500 | 41.2 | | 37.1 | |
| 630 | 42.5 | | 37.4 | |
| 800 | 41.2 | 47.7 | 38.6 | 41.9 |
| 1000 | 44.1 | | 37.1 | |
| 1250 | 43.2 | | 35.1 | |
| 1600 | 43.7 | 49.7 | 33.4 | 38.4 |
| 2000 | 45.1 | | 33.6 | |
| 2500 | 45.8 | | 33.7 | |
| 3150 | 44.9 | 47.5 | 31.9 | 35.5 |
| 4000 | 42.5 | | 30.5 | |
| 5000 | 38.3 | | 29.4 | |
| 6300 | 34.3 | 36.4 | 31.0 | 39.8 |
| 8000 | 28.2 | | 32.6 | |
| 10000 | 29.8 | | 38.1 | |
| Overall | 55.3 | | 48.5 | |

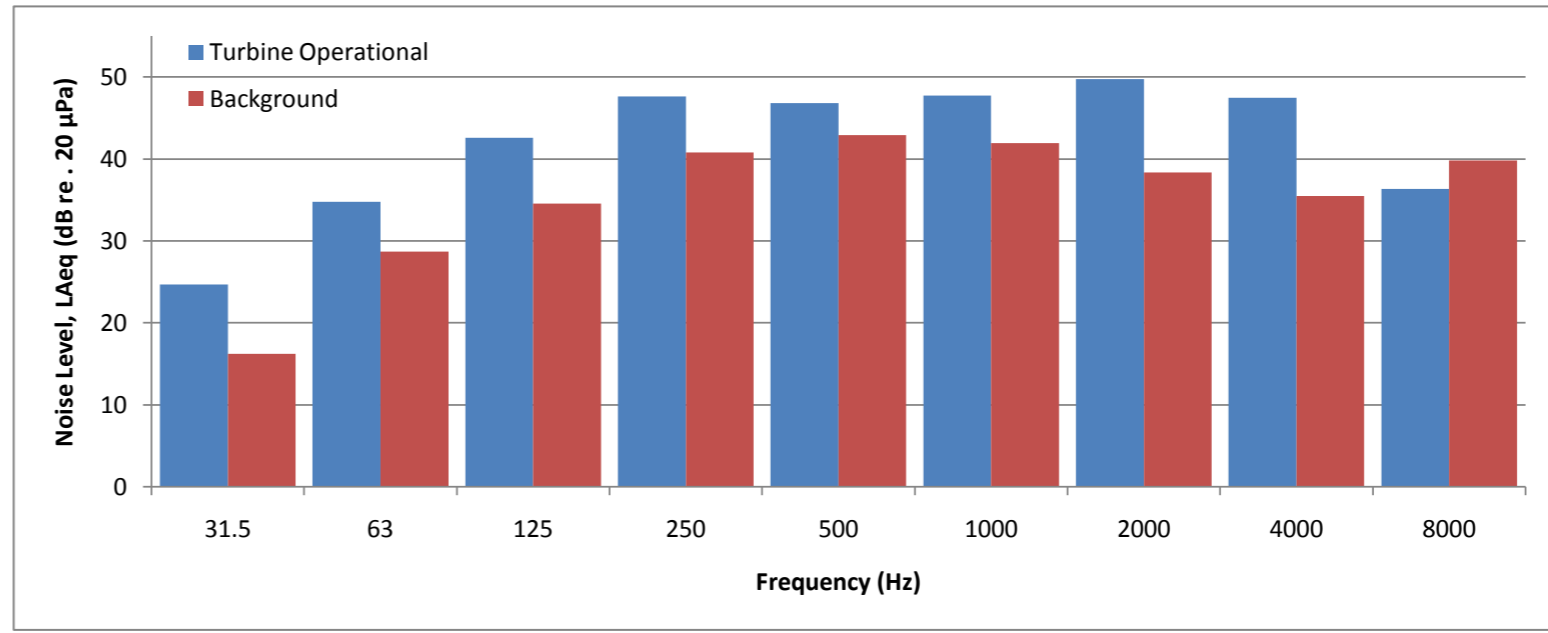
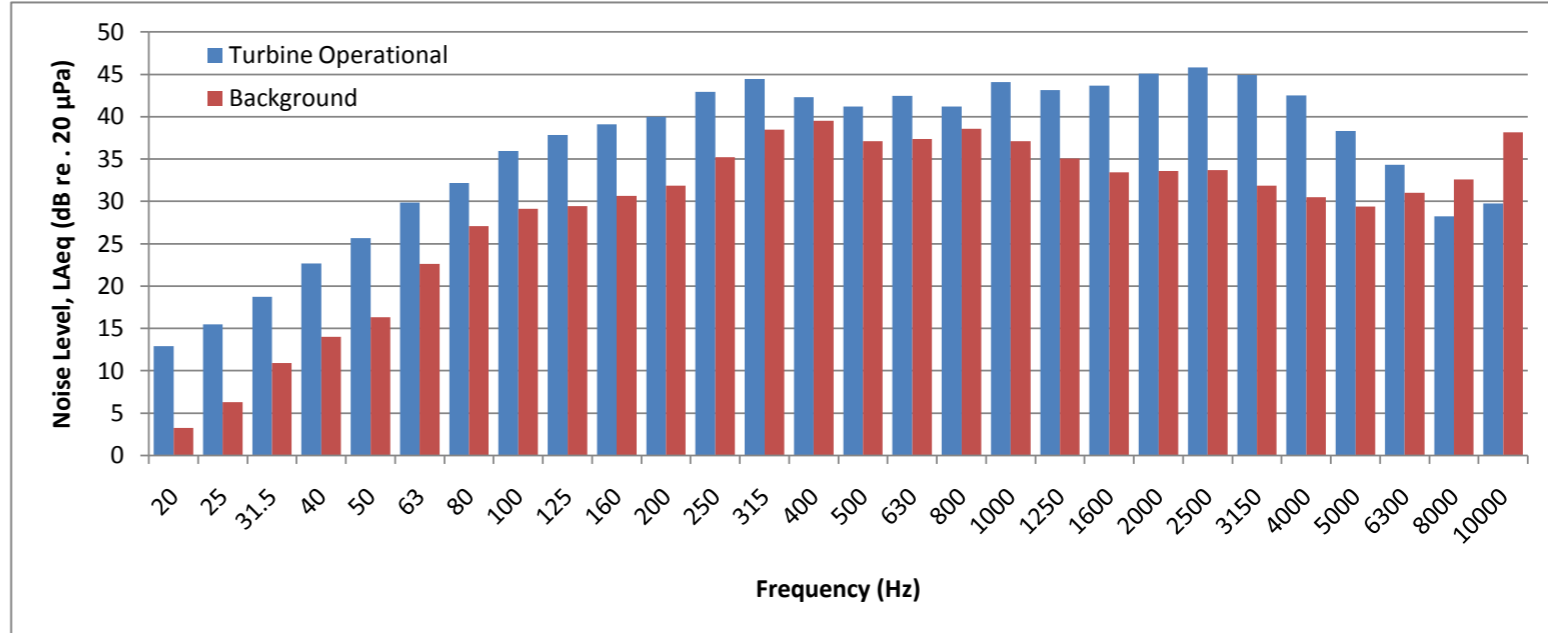


HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 10 m/s





| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 12.5 | | 8.8 | |
| 25 | 16.4 | 26.7 | 11.9 | 19.8 |
| 31.5 | 20.1 | | 14.7 | |
| 40 | 25.1 | | 16.9 | |
| 50 | 28.7 | 37.9 | 20.5 | 31.1 |
| 63 | 32.9 | | 25.2 | |
| 80 | 35.4 | | 29.3 | |
| 100 | 40.0 | 46.0 | 33.6 | 38.6 |
| 125 | 41.0 | | 33.4 | |
| 160 | 42.4 | | 34.5 | |
| 200 | 43.1 | 50.1 | 36.5 | 43.9 |
| 250 | 45.2 | | 38.9 | |
| 315 | 46.8 | | 40.9 | |
| 400 | 46.0 | 50.1 | 43.4 | 48.1 |
| 500 | 44.2 | | 43.5 | |
| 630 | 45.5 | | 43.2 | |
| 800 | 45.4 | 51.5 | 44.8 | 48.8 |
| 1000 | 47.7 | | 44.2 | |
| 1250 | 46.8 | | 42.9 | |
| 1600 | 46.8 | 52.4 | 41.7 | 47.4 |
| 2000 | 47.7 | | 42.7 | |
| 2500 | 48.4 | | 43.4 | |
| 3150 | 48.5 | 51.5 | 42.7 | 47.5 |
| 4000 | 47.0 | | 42.4 | |
| 5000 | 43.2 | | 42.9 | |
| 6300 | 41.0 | 45.3 | 43.0 | 50.9 |
| 8000 | 39.1 | | 44.2 | |
| 10000 | 41.2 | | 48.8 | |
| Overall | 58.7 | | 56.1 | |

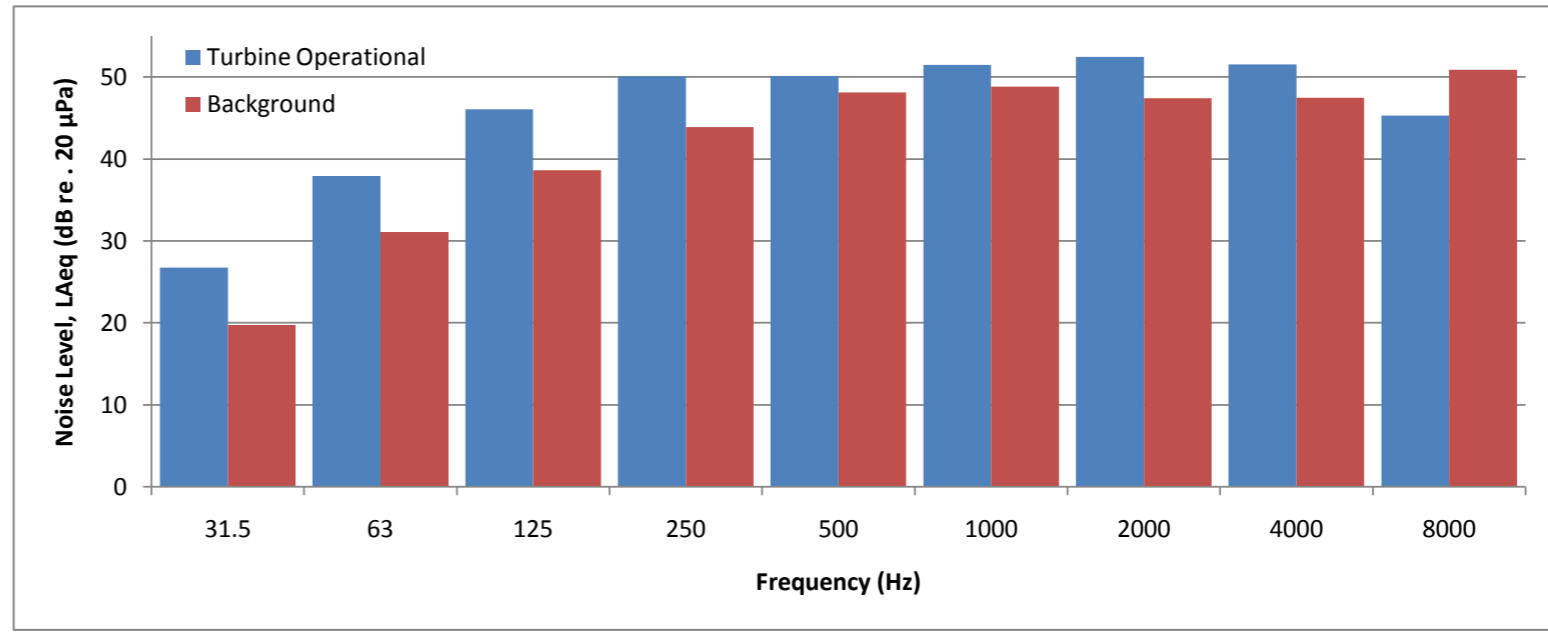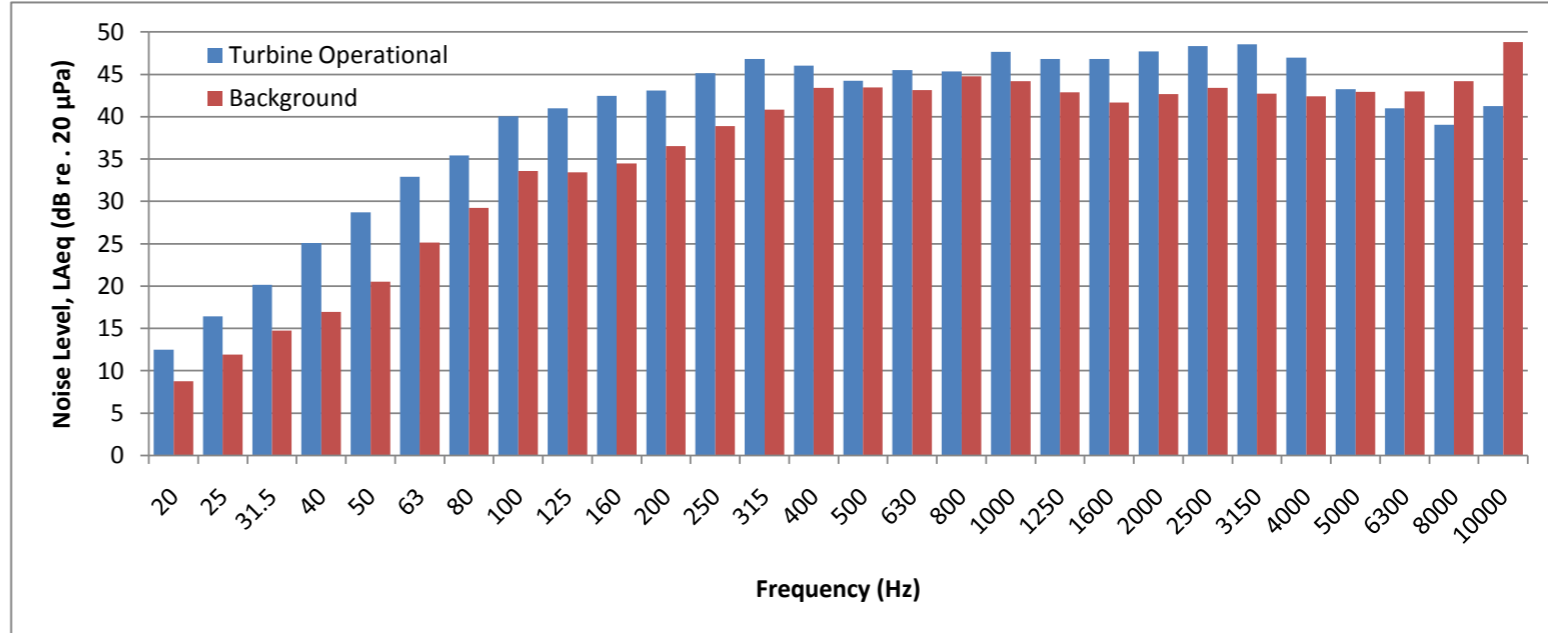

Endurance E-3120 Wind Turbine Wind Speed - 11 m/s





| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 13.5 | | 10.7 | |
| 25 | 17.1 | | 11.9 | |
| 31.5 | 21.0 | 27.7 | 15.6 | 20.6 |
| 40 | 26.1 | | 18.0 | |
| 50 | 28.9 | 39.3 | 19.5 | 30.4 |
| 63 | 33.9 | | 24.1 | |
| 80 | 37.2 | | 28.8 | |
| 100 | 40.5 | 46.8 | 33.6 | 39.3 |
| 125 | 41.8 | | 34.3 | |
| 160 | 43.2 | | 35.4 | |
| 200 | 43.9 | 50.8 | 35.9 | 43.5 |
| 250 | 46.0 | | 38.7 | |
| 315 | 47.5 | | 40.5 | |
| 400 | 47.0 | 51.2 | 43.3 | 47.8 |
| 500 | 45.6 | | 43.3 | |
| 630 | 46.5 | | 42.5 | |
| 800 | 46.4 | 52.8 | 44.2 | 48.0 |
| 1000 | 49.0 | | 43.5 | |
| 1250 | 48.2 | | 41.4 | |
| 1600 | 47.9 | 53.3 | 40.7 | 44.6 |
| 2000 | 48.6 | | 39.7 | |
| 2500 | 49.1 | | 38.9 | |
| 3150 | 49.3 | 52.3 | 39.5 | 42.8 |
| 4000 | 47.7 | | 37.4 | |
| 5000 | 44.1 | | 36.6 | |
| 6300 | 40.8 | 44.8 | 37.1 | 44.7 |
| 8000 | 38.7 | | 38.7 | |
| 10000 | 40.4 | | 42.4 | |
| Overall | 59.6 | | 53.7 | |

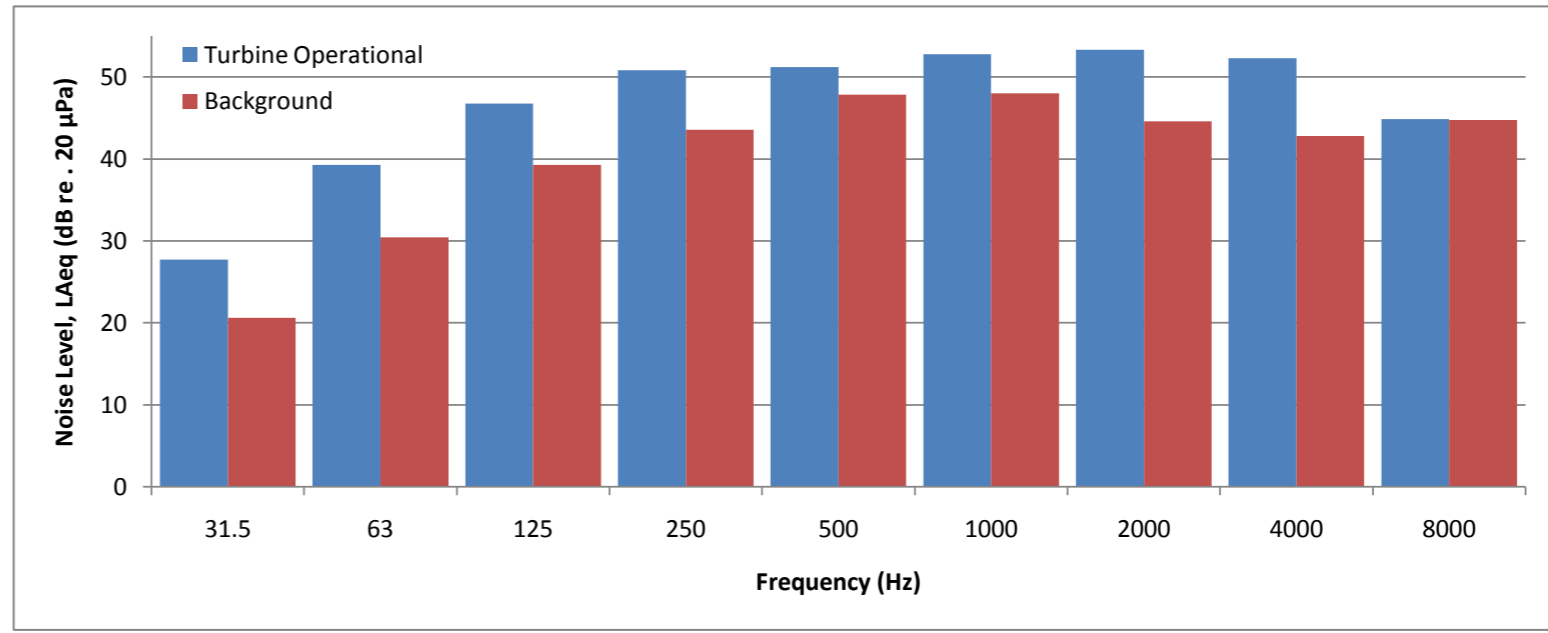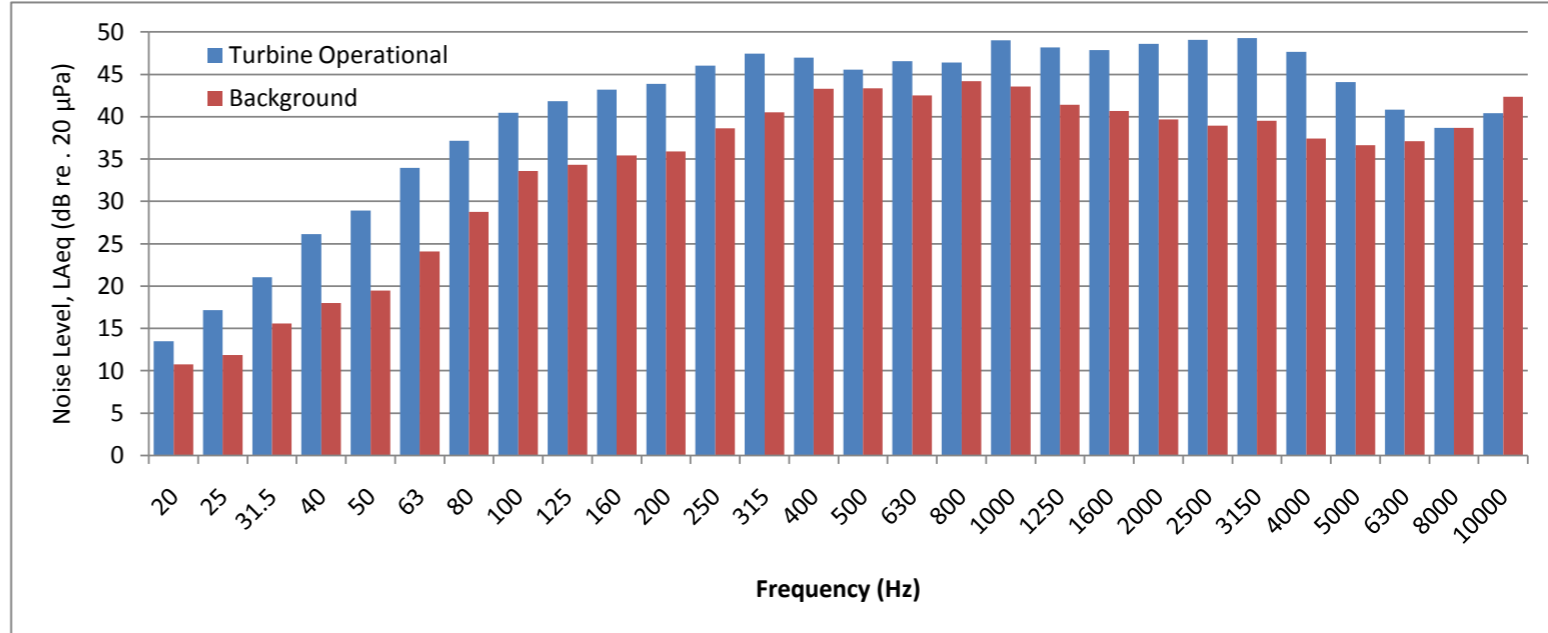

Endurance E-3120 Wind Turbine Wind Speed - 12 m/s



| Frequency (Hz) | Turbine Operational | | Background | |
|----------------|-------------------------|----------------------|-------------------------|----------------------|
| | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) | 1/3 Octave Band (dB(A)) | Octave Band (dB (A)) |
| 20 | 13.2 | | 9.0 | |
| 25 | 17.2 | | 11.3 | |
| 31.5 | 21.1 | 27.4 | 13.9 | 19.1 |
| 40 | 25.7 | | 16.3 | |
| 50 | 28.4 | 38.5 | 20.0 | 30.9 |
| 63 | 33.2 | | 24.5 | |
| 80 | 36.4 | | 29.3 | |
| 100 | 40.6 | 46.7 | 34.4 | 38.8 |
| 125 | 41.9 | | 33.6 | |
| 160 | 43.1 | | 34.1 | |
| 200 | 43.7 | 50.6 | 36.0 | 43.6 |
| 250 | 45.9 | | 38.8 | |
| 315 | 47.3 | | 40.6 | |
| 400 | 47.0 | 51.6 | 43.4 | 48.1 |
| 500 | 46.5 | | 44.4 | |
| 630 | 46.9 | | 42.0 | |
| 800 | 46.7 | 53.1 | 44.4 | 48.5 |
| 1000 | 49.3 | | 44.4 | |
| 1250 | 48.7 | | 42.0 | |
| 1600 | 48.0 | 53.4 | 40.2 | 44.6 |
| 2000 | 48.7 | | 39.9 | |
| 2500 | 49.2 | | 39.4 | |
| 3150 | 49.4 | 52.5 | 38.2 | 42.6 |
| 4000 | 47.9 | | 37.8 | |
| 5000 | 44.9 | | 37.4 | |
| 6300 | 43.1 | 47.8 | 37.6 | 44.3 |
| 8000 | 41.5 | | 38.2 | |
| 10000 | 44.1 | | 41.5 | |
| Overall | 59.9 | | 53.8 | |

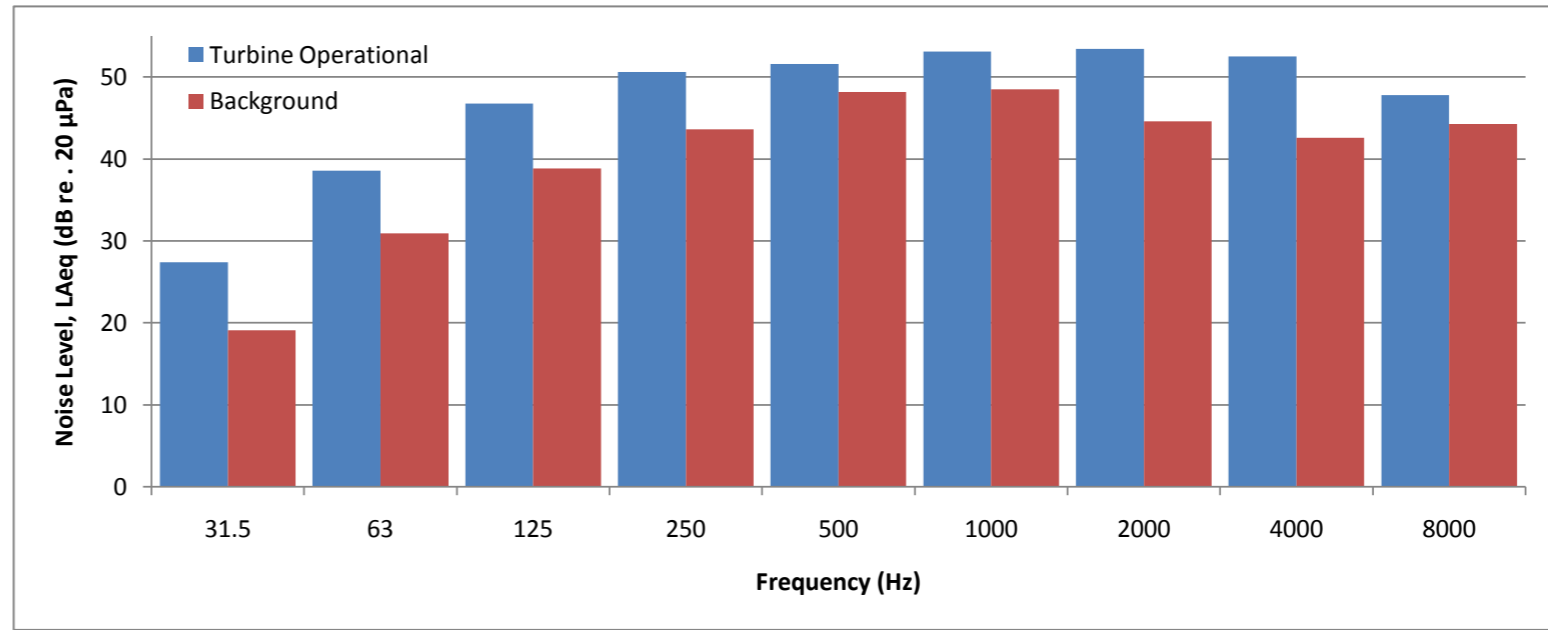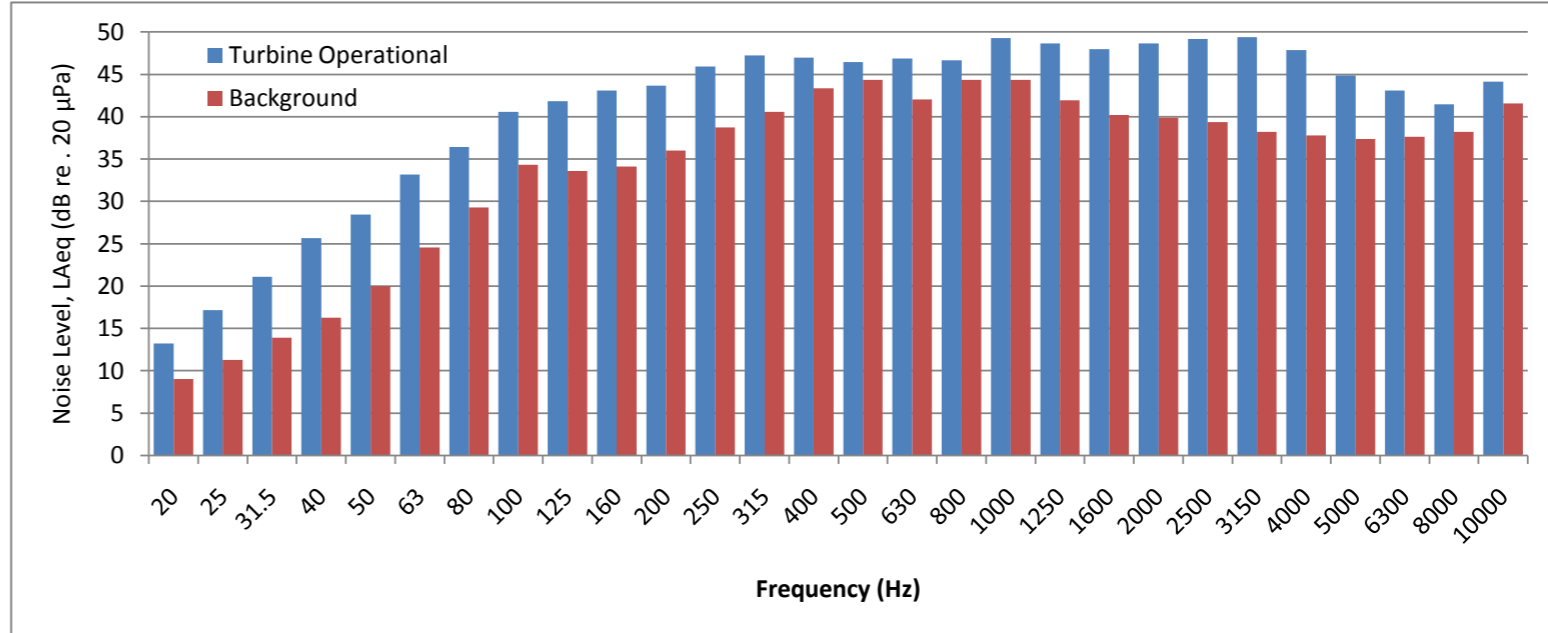



Appendix G
Background Corrected One Third Octave Sound
Power Levels

HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 6 m/s



| Frequency (Hz) | 1/3 Octave Band (dB LWA) | Octave Band (dB LWA) |
|----------------|--------------------------|----------------------|
| 20 | 45.1 | |
| 25 | 49.0 | |
| 31.5 | 51.1 | 58.1 |
| 40 | 56.4 | |
| 50 | 59.2 | |
| 63 | 63.9 | 68.0 |
| 80 | 64.9 | |
| 100 | 68.4 | |
| 125 | 69.9 | 74.8 |
| 160 | 71.3 | |
| 200 | 72.1 | |
| 250 | 75.3 | 80.8 |
| 315 | 78.4 | |
| 400 | 75.9 | |
| 500 | 76.1 | 81.5 |
| 630 | 77.8 | |
| 800 | 76.8 | |
| 1000 | 79.8 | 82.9 |
| 1250 | 77.1 | |
| 1600 | 76.7 | |
| 2000 | 77.2 | 81.9 |
| 2500 | 77.3 | |
| 3150 | 75.0 | |
| 4000 | 72.4 | 77.6 |
| 5000 | 69.1 | |
| 6300 | 63.7 | |
| 8000 | 58.0 | 64.9 |
| 10000 | 50.6 | |
| Overall | | 88.5 |

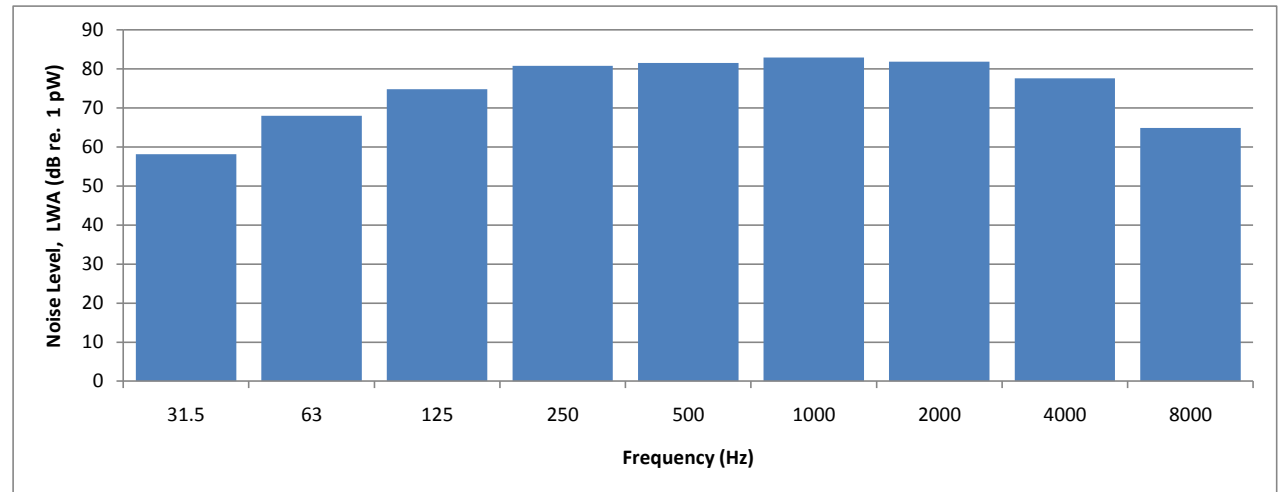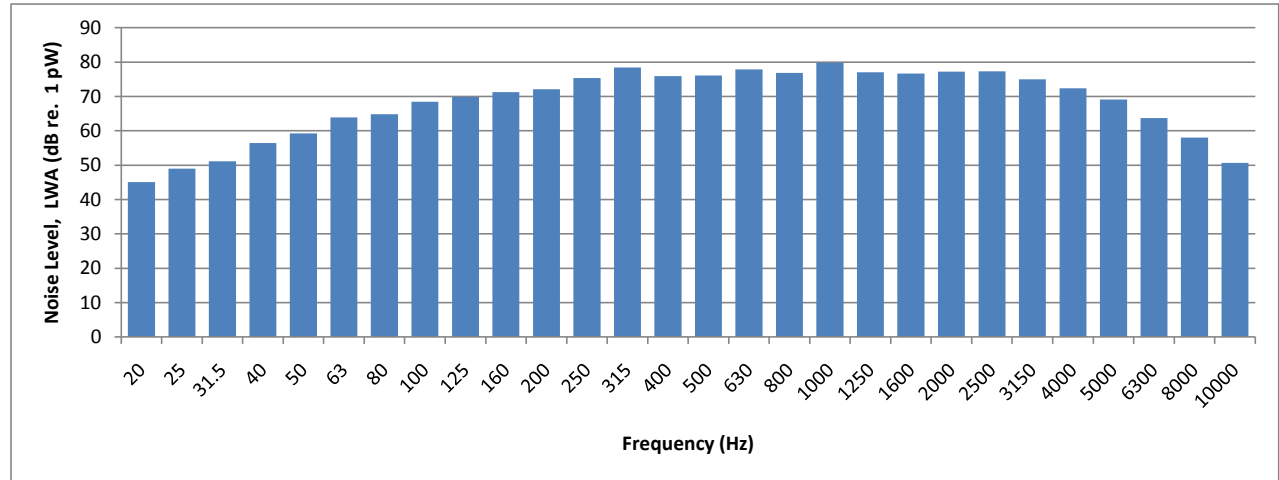

HM:2300/R1



Endurance E-3120 Wind Turbine Wind Speed - 7 m/s*



| Frequency (Hz) | 1/3 Octave Band (dB LWA) | Octave Band (dB LWA) |
|----------------|--------------------------|----------------------|
| 20 | 46.5 | |
| 25 | 49.9 | |
| 31.5 | 53.2 | 59.1 |
| 40 | 57.0 | |
| 50 | 59.7 | |
| 63 | 65.0 | 69.4 |
| 80 | 66.6 | |
| 100 | 69.9 | |
| 125 | 71.9 | 76.7 |
| 160 | 73.4 | |
| 200 | 74.6 | |
| 250 | 77.3 | 82.1 |
| 315 | 79.1 | |
| 400 | 77.5 | |
| 500 | 77.0 | 82.5 |
| 630 | 78.6 | |
| 800 | 76.9 | |
| 1000 | 79.4 | 83.0 |
| 1250 | 78.1 | |
| 1600 | 78.7 | |
| 2000 | 80.0 | 84.5 |
| 2500 | 80.5 | |
| 3150 | 79.3 | |
| 4000 | 76.6 | 81.7 |
| 5000 | 72.5 | |
| 6300 | 67.6 | |
| 8000 | 61.0 | 68.6 |
| 10000 | 53.4 | |

| | |
|---------|------|
| Overall | 90.2 |
|---------|------|

*Background taken from 6m/s

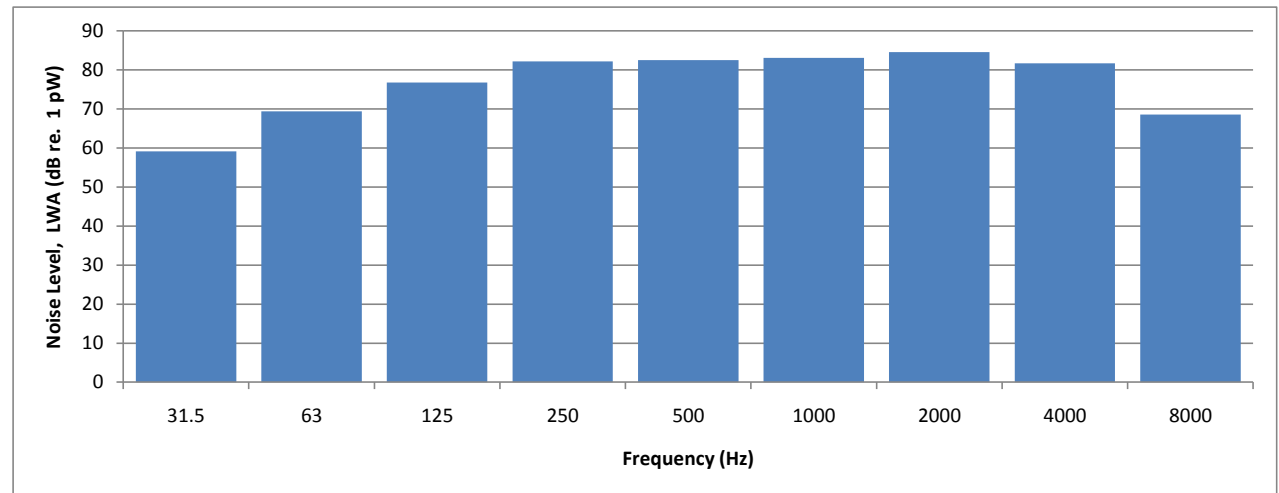
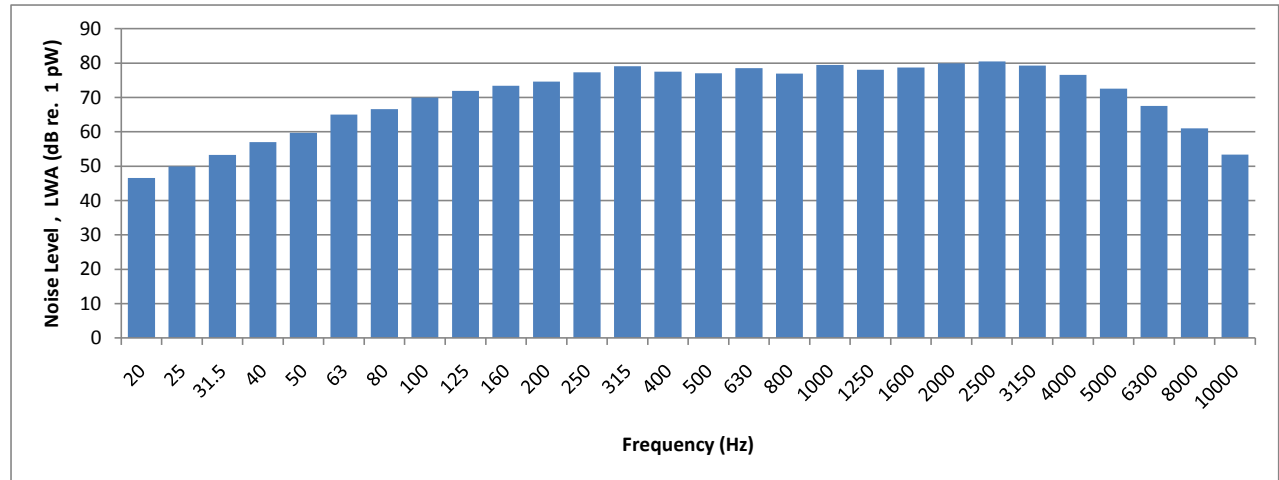


HM:2300/R1

Endurance E-3120 Wind Turbine Wind Speed - 8 m/s
















| Frequency (Hz) | 1/3 Octave Band (dB LWA) | Octave Band (dB LWA) |
|----------------|--------------------------|----------------------|
| 20 | 49.1 | |
| 25 | 51.3 | |
| 31.5 | 53.9 | 59.9 |
| 40 | 57.8 | |
| 50 | 60.7 | |
| 63 | 65.6 | 70.3 |
| 80 | 67.7 | |
| 100 | 71.4 | |
| 125 | 73.9 | 78.7 |
| 160 | 75.6 | |
| 200 | 76.2 | |
| 250 | 79.2 | 83.7 |
| 315 | 80.3 | |
| 400 | 77.6 | |
| 500 | 77.2 | 82.6 |
| 630 | 78.6 | |
| 800 | 75.9* | |
| 1000 | 80.3 | 83.9 |
| 1250 | 79.7 | |
| 1600 | 80.8 | |
| 2000 | 82.1 | 86.8 |
| 2500 | 83.0 | |
| 3150 | 82.1 | |
| 4000 | 79.4 | 84.5 |
| 5000 | 75.3 | |
| 6300 | 70.5 | |
| 8000 | 63.9 | 71.5 |
| 10000 | 56.1 | |
| Overall | | 91.8 |

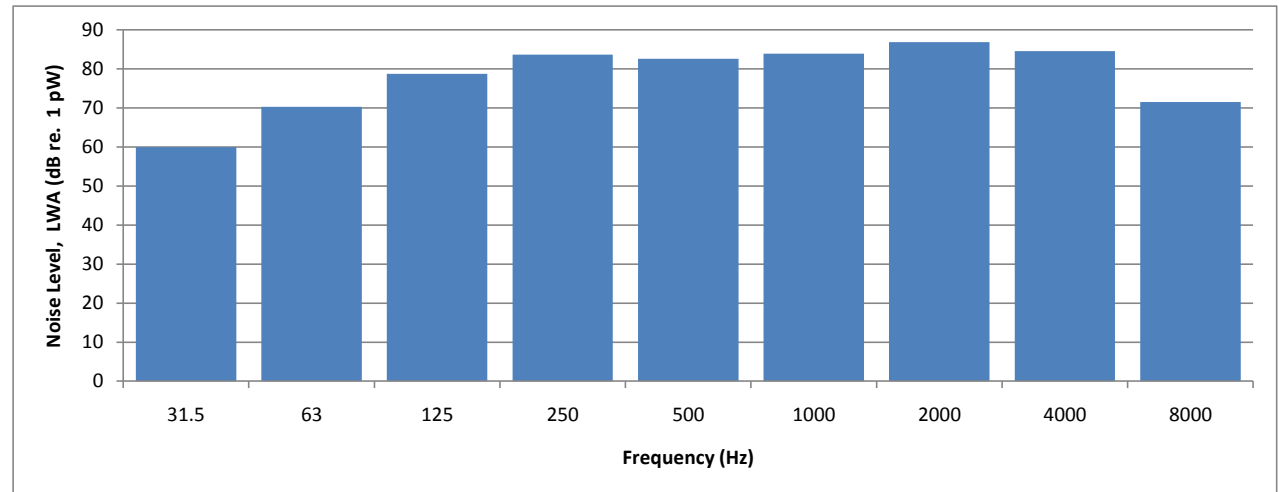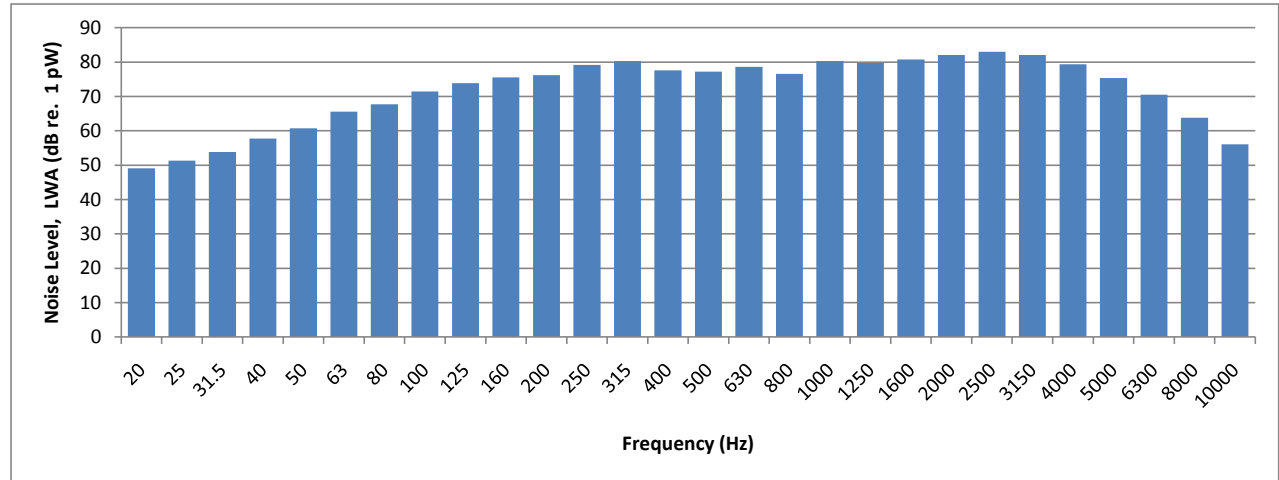














Appendix H

Narrowband Analysis

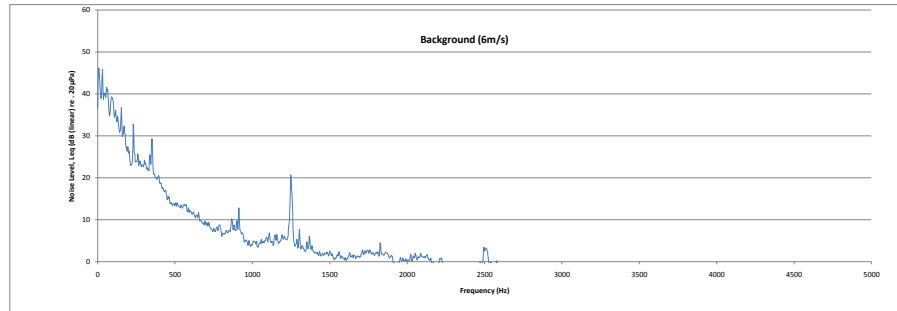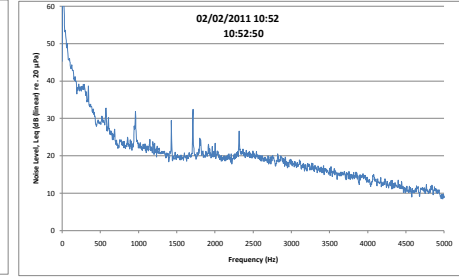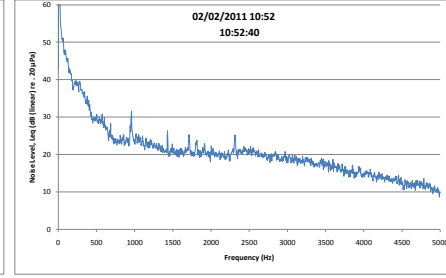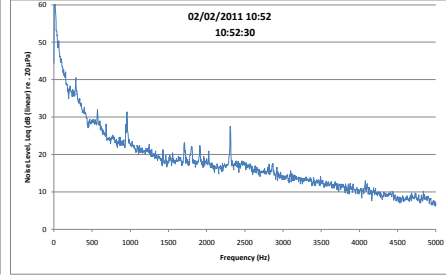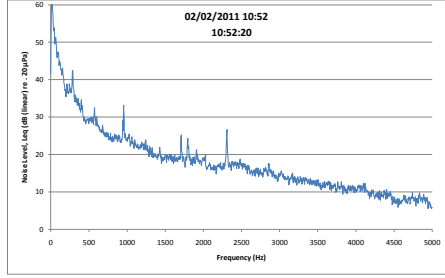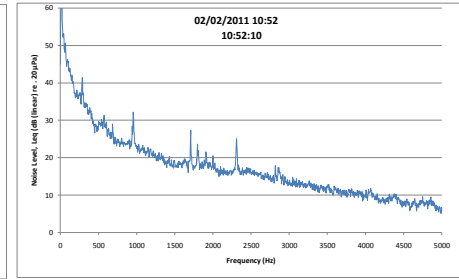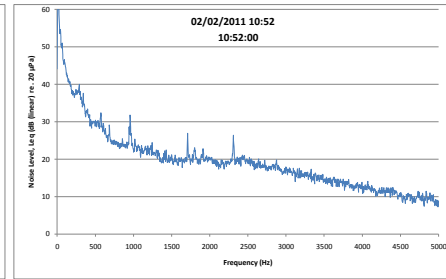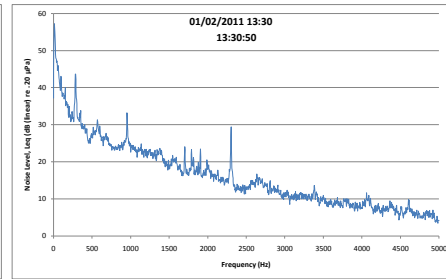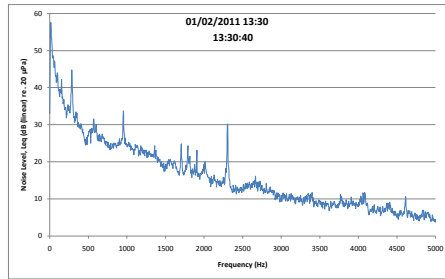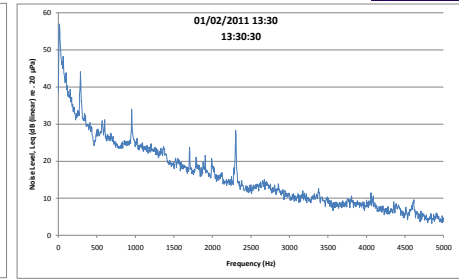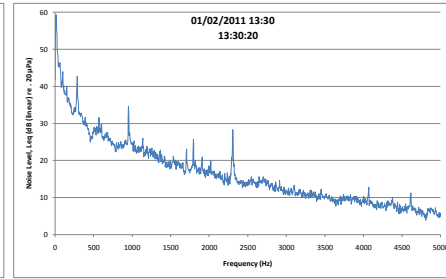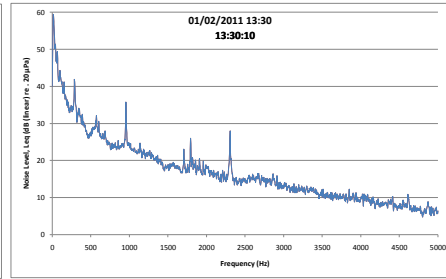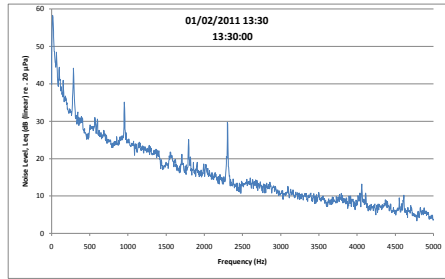

Results of tonal assessment














| Frequency (Hz) | Tonal Audibility (dB) |
|----------------|-----------------------|
| 287.2 | -0.99 |
| 955.2 | -2.08 |
| 2307.8 | -0.01 |

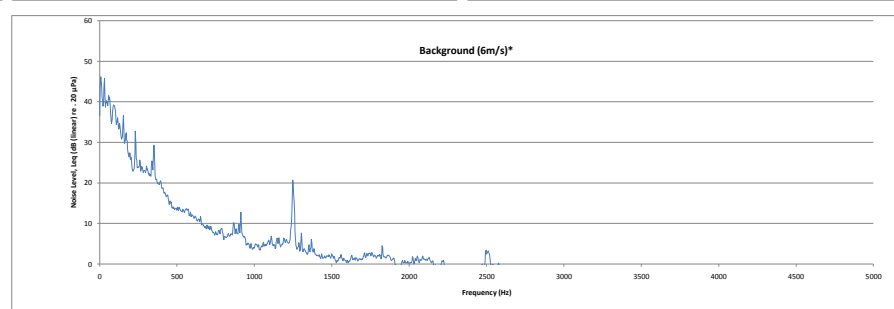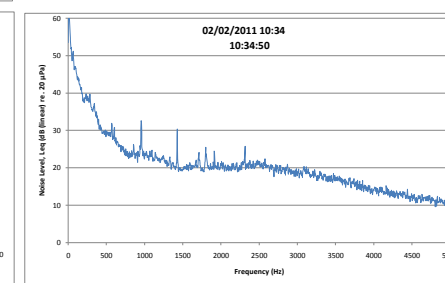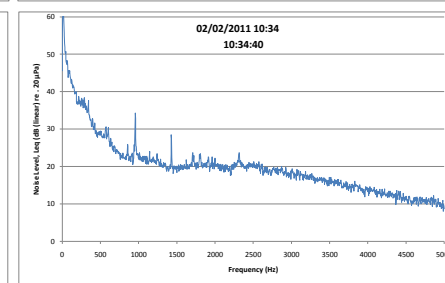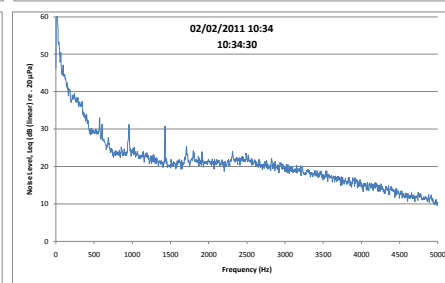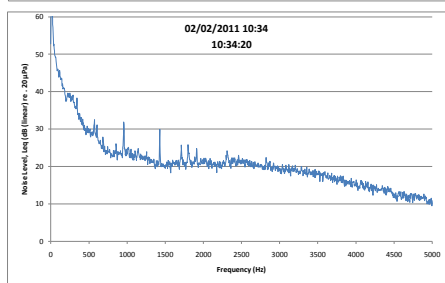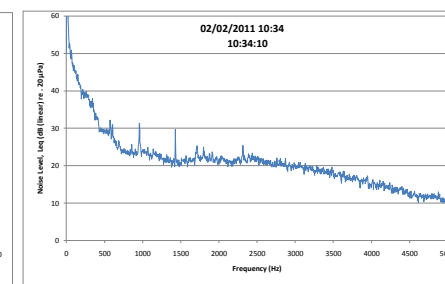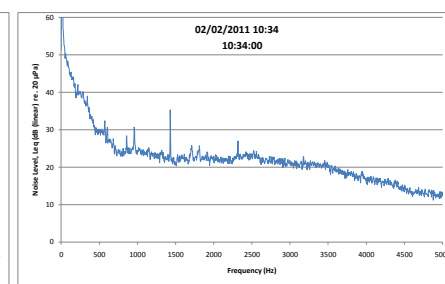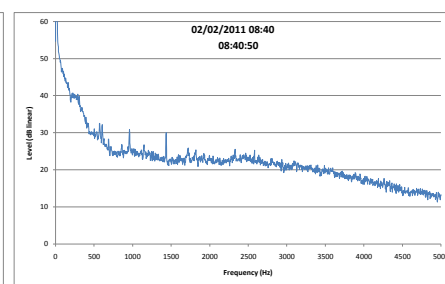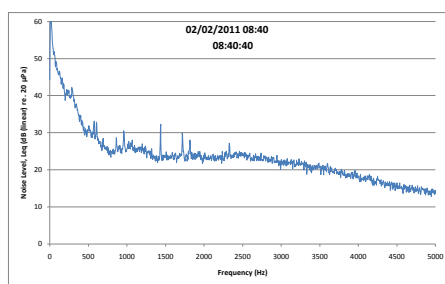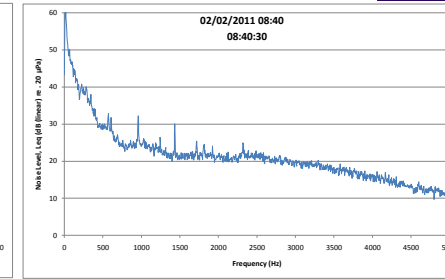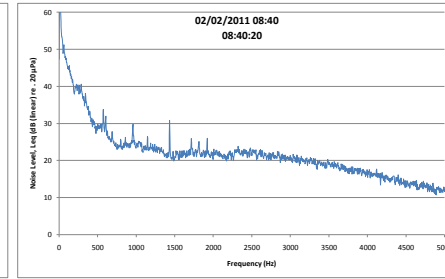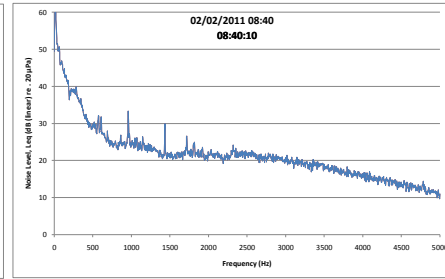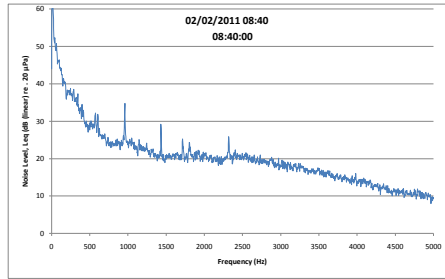














*No background noise data for 7m/s

Results of tonal assessment

| Frequency (Hz) | Tonal Audibility (dB) |
|---------------------|-----------------------|
| No tones identified | |

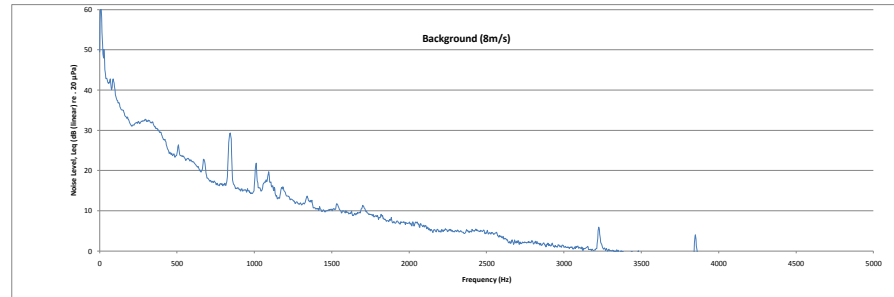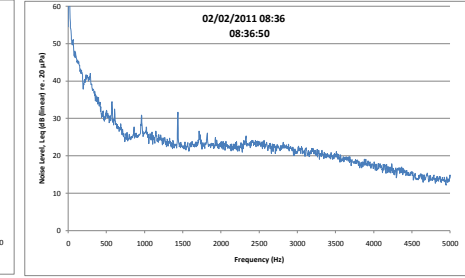
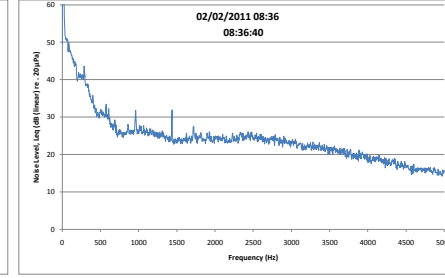
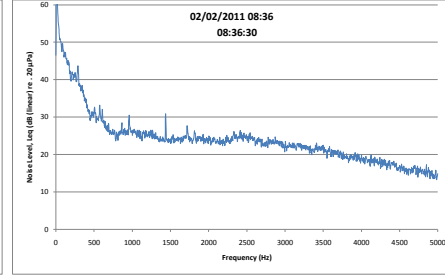
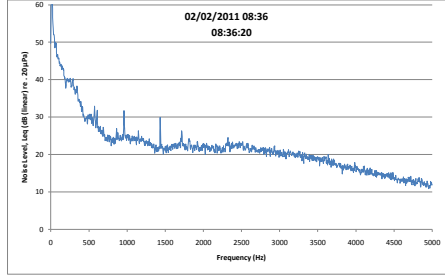
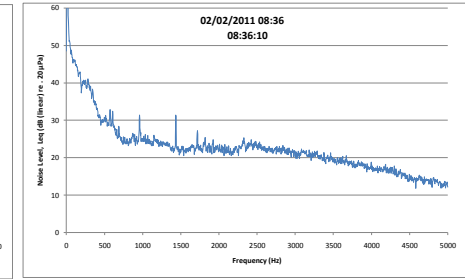
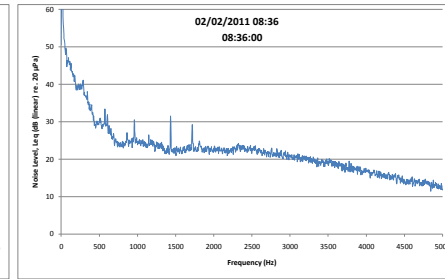
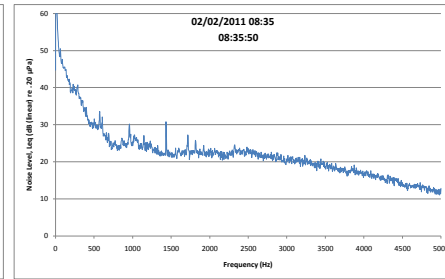
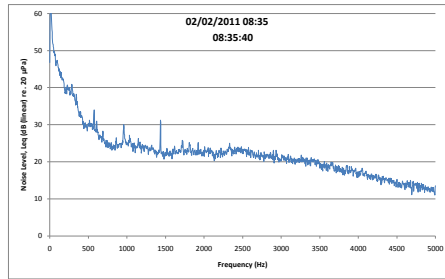
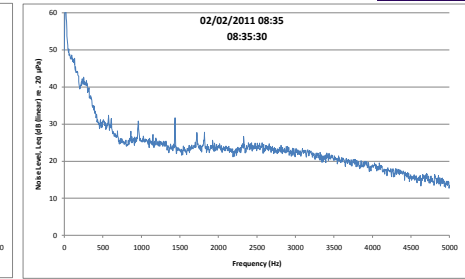
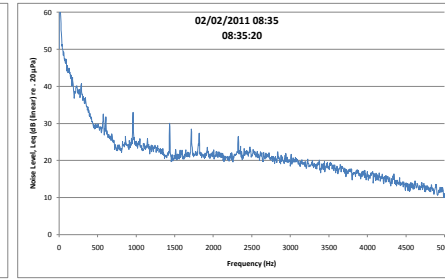
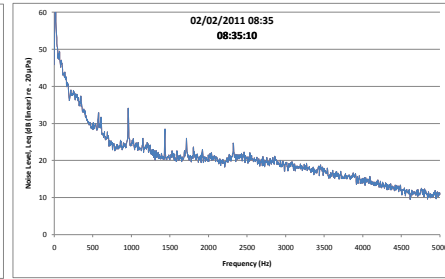
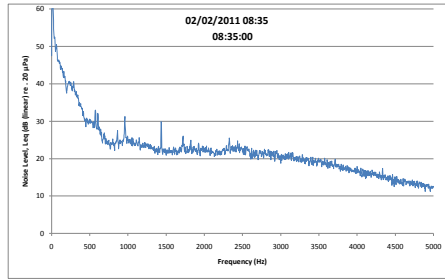


| Results of tonal assessment | |
|-----------------------------|-----------------------|
| Frequency (Hz) | Tonal Audibility (dB) |
| No tones identified | |

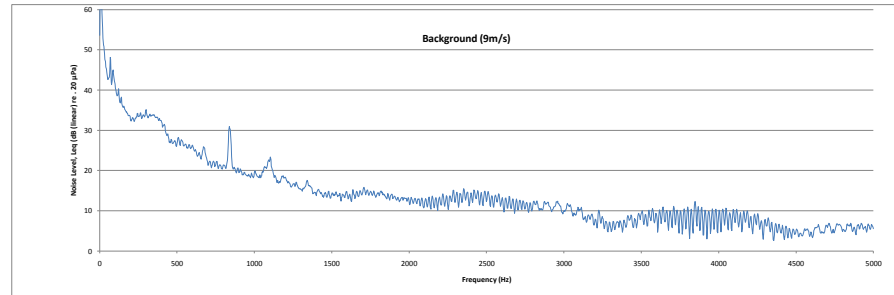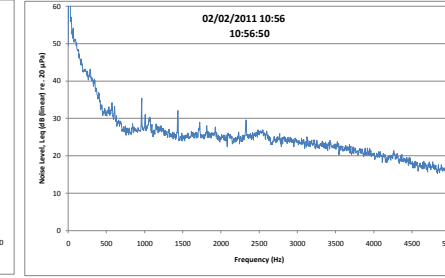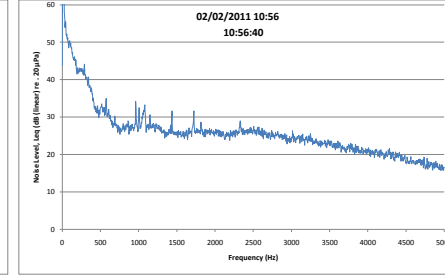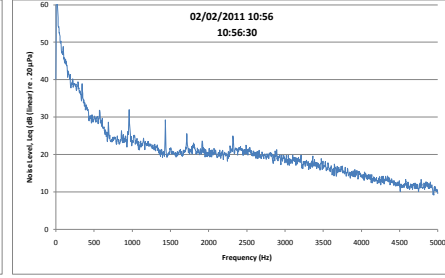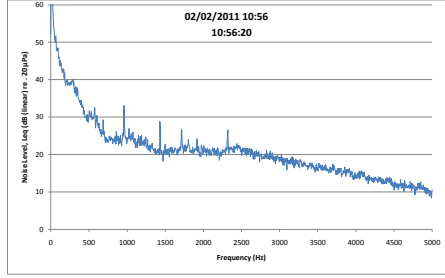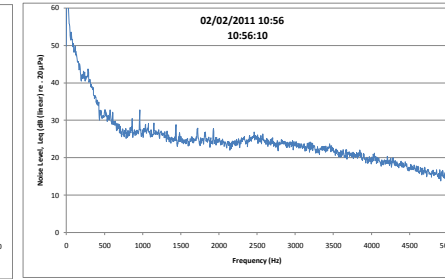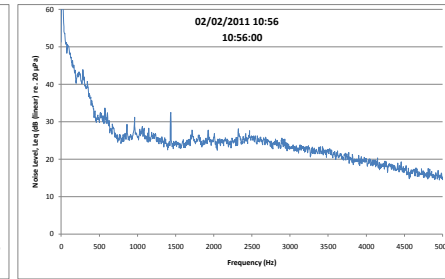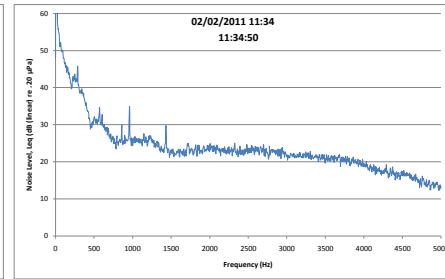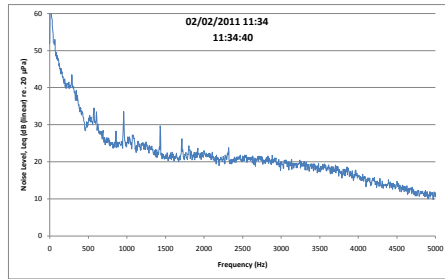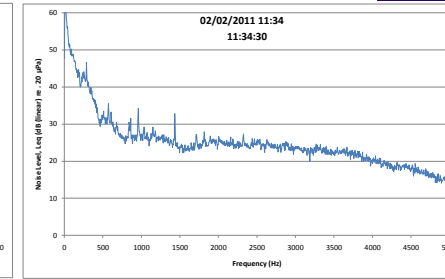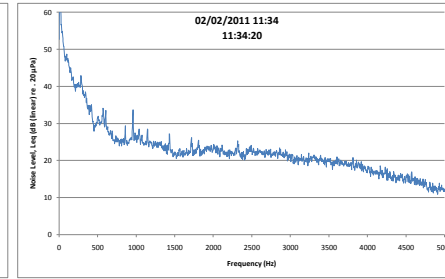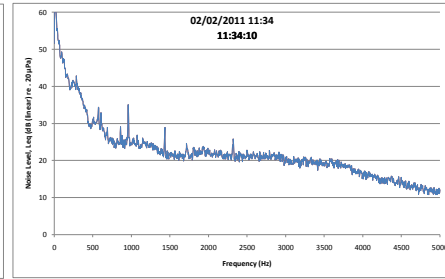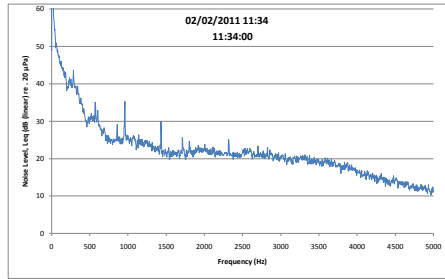

Results of tonal assessment

| Frequency (Hz) | Tonal Audibility (dB) |
|---------------------|-----------------------|
| No tones identified | |

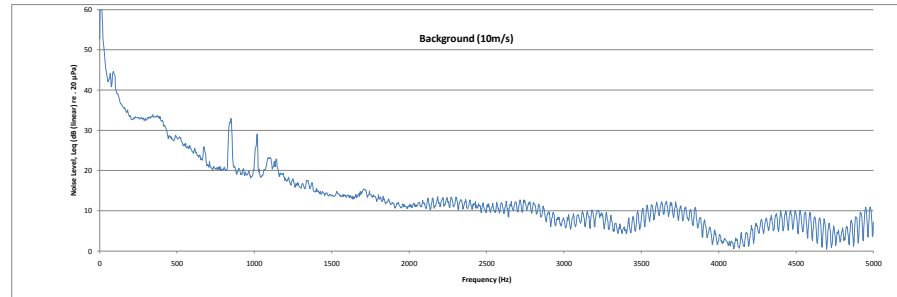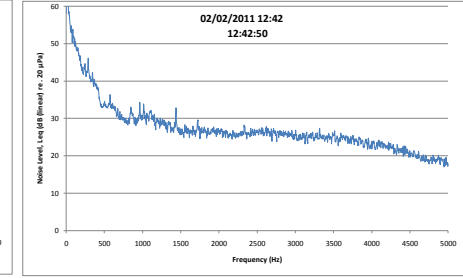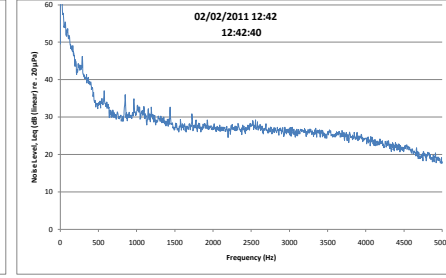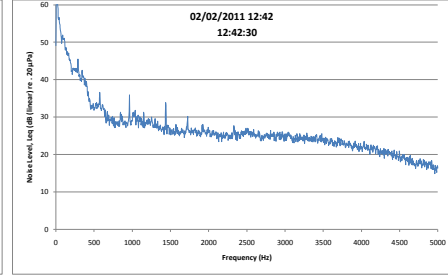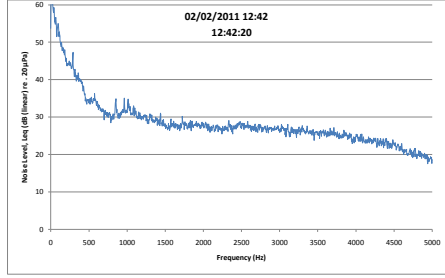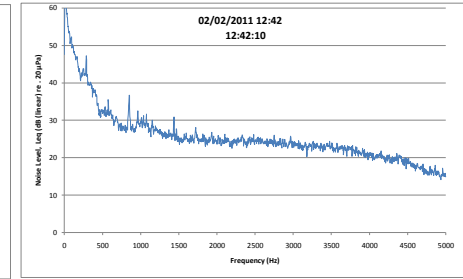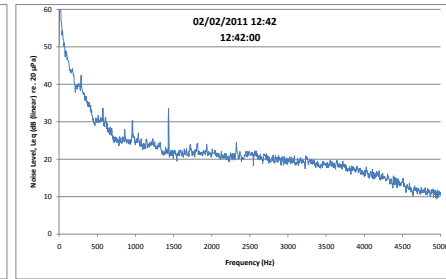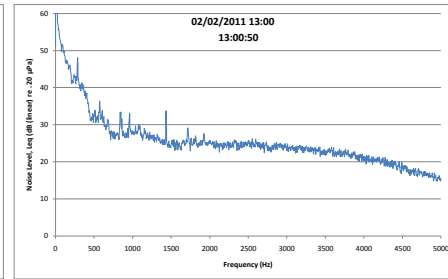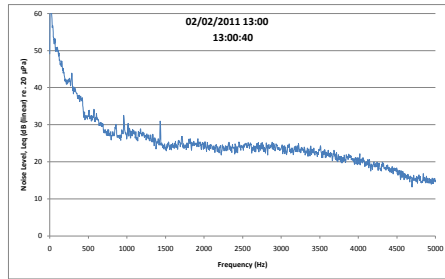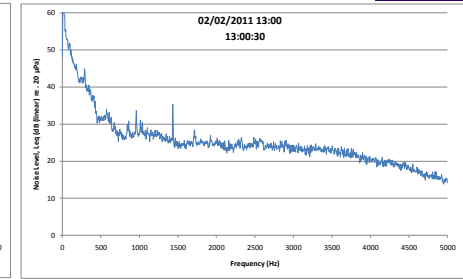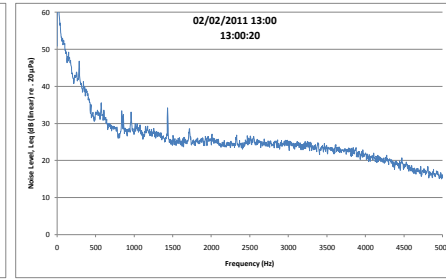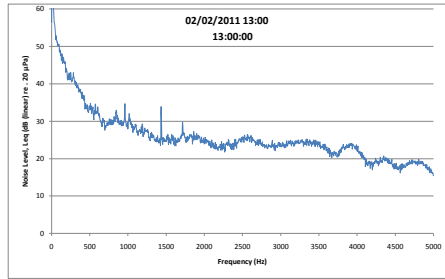

Results of tonal assessment

| Frequency (Hz) | Tonal Audibility (dB) |
|---------------------|-----------------------|
| No tones identified | |