nottssport®

Synthetic Surfacing / Cricket

Notts Sport® Information and Quotation Options for The Construction of Non-Turf Cricket Facilities

Hoylandswaine Cricket Club

HCC

South Yorkshire

nottssport®

Synthetic Surfacing / Cricket

Hoylandswaine Cricket Club

Brief Project Summary - A Twin Lane Notts Sport® practice facility.

The facility comprises of practice pitches, incorporating Notts Sport® ***ECB Approved*** cricket systems and highest grade superior playing surfaces and underlays to extend facility lifespan.

In order to ***cater for players of all ages and abilities,*** the ECB Approved Notts Sport® cricket systems specified require ***minimum maintenance*** and will provide ***consistent performance.***

A 96' heavy duty cage structure, clad with oil based knotless netting has also been specified.

The immediate surrounds of the facility are to be fully synthetic (no grass within area), including a 0.50m mowing margin around the cage structure. This will ***significantly reduce maintenance*** requirements within the facility.

The club will be provided with a ***12 month construction guarantee*** upon facility completion.

All Notts Sport® ECB Approved new build cricket systems come with a ***unique 5 year performance guarantee*** in line with ECB approval for peace of mind and health and safety.

All Notts Sport® surface materials come with a ***5 year warranty*** against degradation or manufacturing fault. Any underlays and shock pads will not need to ever be replaced.

All steel and fencing comes with a **7 year warranty** against corrosion.

Quotation to be provided by Dura Sport Ltd, who are authorised to supply and install Notts Sport® ECB Approved Cricket systems under license.

No deposit is required prior to construction, *subject to a successful credit check.*

Price provided is for the supply and FULL installation of the requested facility, with ***absolutely no hidden extra costs.***

Most importantly, the summary above describes the bespoke facility which you have designed for the Cricket Club in terms of the end user, lifespan, performance and maintenance requirements.

nottssport®

Synthetic Surfacing / Cricket

SUMMARY OF PROPOSALS:

Summary:

Hoylandswaine Cricket Club is looking at the feasibility of having a twin lane non-turf cricket facility constructed at their ground. The facility is to incorporate ECB approved Notts Sport® cricket systems following ECB guidelines & TS6 requirements.

Site Preparation and Grading and Facility Requirements:

See Design Foot Print and Sales Lead Sheet for information.

Approximate Project Location: (NOT to Scale)



Roy Chapman of Hoylandswaine Cricket Club has been made aware that normal practice would be for a facility to run in a North South direction to avoid issues with the low summer sun. However, during discussions it came to light that the club are going to undertake a massive rebuilding programme regarding levelling the outfield. The proposed area is the only area of the ground which does not slope considerably and requires little or no remedial work. It is also free draining Greenfield area and access to this area is very good for plant and machinery

Approximate cost per lane:

nottssport
Synthetic Surfacing / Cricket

T Bay Facility: Popular Cricket Practice Area Layouts (per lane)

The layouts opposite illustrate the options available to the client in terms of dimensions, size, facility type and ECB Approved systems.

Following discussions it would appear that the client wishes for the practice area specification to be constructed at this time that is denoted by an*

The enclosed information pack and subsequent quotation has been completed based on this information. However, please note that a facility featuring any of the options opposite can be priced upon request.

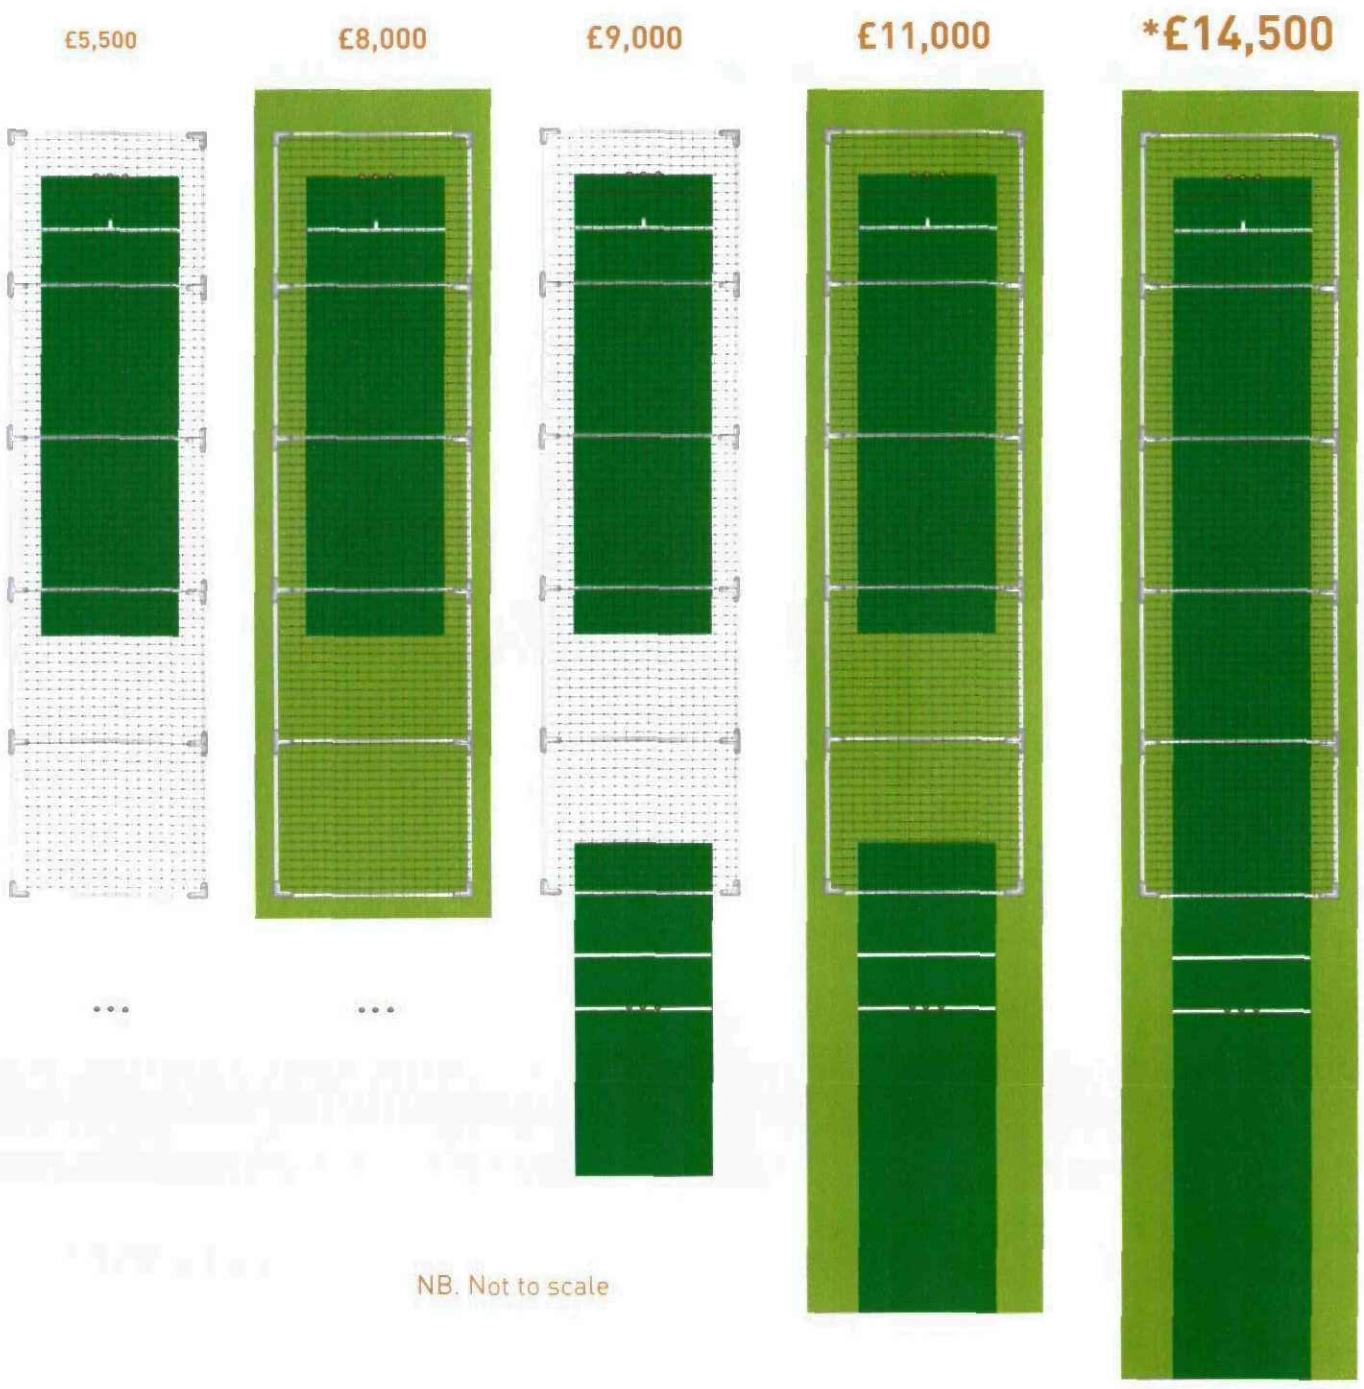

NB. Not to scale

nottssport®

Synthetic Surfacing / Cricket

CRICKET SALES LEAD

Client:

Hoylandswaine Sports & Social Club
Haigh Lane, Hoylandswaine, Barnsley, South Yorkshire. S70 1QA

Quotation Requirements:

Base Preparation:

Define the proposed area 29.10m x 8.12m. Set falls in line with ECB requirements and strip turf to a minimum 100mm consistent depth and deposit spoil as agreed with client. Fit 100mm x 50mm tanalised pressure treated timber boards to perimeter of area and define the two batting ends and two bowling ends.

Import, screed level and consolidate 10-4mm clean graded stone to the practice pitches to reduce the depth of excavation to 50mm. Import, screed level and consolidate 10-6mm clean graded stone to the surrounding area in preparation for the installation of VHAF® NottsSward® surround material.

Performance System, Surrounds and Cage Construction:

Then supply and fully install the agreed Notts Sport® ECB Approved twin bay non-turf practice facility, incorporating:

Batting Ends

2no. ECB Approved Notts Sport® Envelope system® batting end, measuring 11.00m x 2.74m

Lay NottsFilm® geo textile membrane sized 11.00m x 2.90m over the 10-6mm clean graded stone and up the sides of the excavation. This will leave an overlap until the laying of the hard porous is complete and prevent migration of particles between the two stone types. The NottsFilm® also provides load bearing properties to avoid sinking.

Import, screed and consolidate selected approved hard porous performance aggregate to a consolidated depth of 50mm. Consolidate fully by treading and using a compactor plate or roller.
Fold the overlap from the NottsFilm® over the prepared base.

Install a NottsPad® performance underlay measuring 11.00m x 2.50m over the performance aggregate. The pad will prevent any undulations occurring within the batting ends, particularly in areas of high traffic. The pad is fixed to the stone by the use of 150mm galvanised nails every 100mm around the outskirts of the pad.

The batting ends are to be surfaced with a Notts Sport® playing surface, which is to be installed under tension and secured using galvanised nails at 150mm centres. The surface is then to be marked out as per rules of the game towards the back of the batting end.

Bowling Ends

2no. Notts Sport® bowling ends measuring 11.00m x 2.74m.

Import, screed and consolidate selected aggregate to a consolidated depth of 50mm. Consolidate fully by treading and using a compactor plate or roller.

Install a NottsPad® performance underlay measuring 8.00m x 2.50m over the aggregate. The pad will prevent any undulations occurring within the bowling ends, particularly in the run up areas. The pad is fixed to the stone by the use of 150mm galvanised nails every 100mm around the outskirts of the pad.

The bowling ends are to be surfaced with a Notts Sport® playing surface, which is to be installed under tension and secured using galvanised nails at 150mm centres. The surface is then to be marked out as per rules of the game.

Cage Structure

A Twin bay cricket cage sized 25.62m x 7.32m x 3.66m. Cage constructed from fully galvanised tubular steel poles and ground sockets using 42.40mm tubular steel poles and key clamp fittings. Cage to be clad with heavy duty 2.50mm green heavy duty oil based knotless netting to full roof, sides, back and intermediates.

VHAF® NottsSward® low maintenance cricket surround (CS) material. To be laid over a prepared stone foundation of 10-4mm non-frost susceptible aggregate. The carpet is to be sand filled at the applicable rate and secured to the tanalised pressure treated timber perimeter boards.

Upon completion of the installation, re-grade the immediate surrounding ground to flush level with VHAF® NottsSward® material in line with ECB / TS6 requirements.

Site Information:

Access to the site is very good
Access to the location is very good
Drainage of the site is described as fine
Material storage is unavailable but welfare facilities are available
Water point and hoses are available
Any spoil can remain on site

Further Quotation Requests:

Provide a quotation to supply and install full length pitches within the foot print as opposed to bat and bowl configuration.

Contact Details:

Please submit your quotations to: leej@nottssport.com to be forwarded to:

Mr Roy Chapman, 51, Park Grove, Barnsley, South Yorkshire. S70 1QA.

telephone: 07912 116596

nottssport®

Synthetic Surfacing / Cricket

Practice Pitch Cross Section:

The ECB Approved Notts Sport® Envelope system®



KEY DETAILS:

Carpet Thickness: 10mm.

Performance Underlay: 6mm.

De – Contamination Geo Textile.

Performance Aggregate (50mm)

Drainage Raft (minimum 50mm)

Number of Synthetic Components: 3

The ECB Approved Notts Sport® Envelope system® offers outstanding value for money and is suitable for players who need a realistic alternative to natural turf for matches, practice and coaching.

The system will imitate the best characteristics of a well maintained grass pitch. In fact, this system will provide similar range of pace and bounce to natural turf.

This is possible because the playing characteristics are controlled by the hard porous base and NottsPad® which will adjust subject to moisture and compaction.

Unlike old fashioned pitch designs, this system utilises special synthetic components to help *protect and safeguard* pitch playing characteristics in the future.

These proven features will help minimise any future pitch refurbishment work and will also help reduce maintenance requirements, resulting in less work for your ground staff.

Maintenance Guide: Very Low

Playing Characteristics: Natural / Medium Pace

Performance Guarantee: 5 years

Surface Material Warranty: 5 years

Typical lifespan of currently chosen playing surface: 10 years +

System Type: Designed to cater for players of all ages and abilities

nottssport®

Synthetic Surfacing / Cricket

Surround Material

Cross Section:

VHAF® NottsSward® Synthetic Surround



KEY DETAILS:

Carpet Thickness: 12mm
Sand filled at the applicable rate.

Number of Synthetic Components: 1

Aggregate Depth: MINIMUM 100mm.

The VHAF® NottsSward® material is installed in and around the non-turf cricket facility to aid with levels and drainage of the site.

More importantly, the material is installed to significantly reduce maintenance. The VHAF® NottsSward® helps to provide an **entirely synthetic footprint**. This means that there is no need for the use of strimmers, mowers or similar to be used within the facility.

The VHAF® NottsSward® is sand filled in order to protect the pile height of the carpet and aid with drainage, and is installed flush level with the surrounding ground to avoid trip hazards and provide a smooth transition from the facility to the natural turf.

The Summer Green colour of the VHAF® NottsSward® is aesthetically pleasing and helps to blend the facility into the natural environment.

Maintenance Guide: Very Low

Material Warranty: 5 years

nottssport®

Synthetic Surfacing / Cricket

Cage Structure Cross Section:

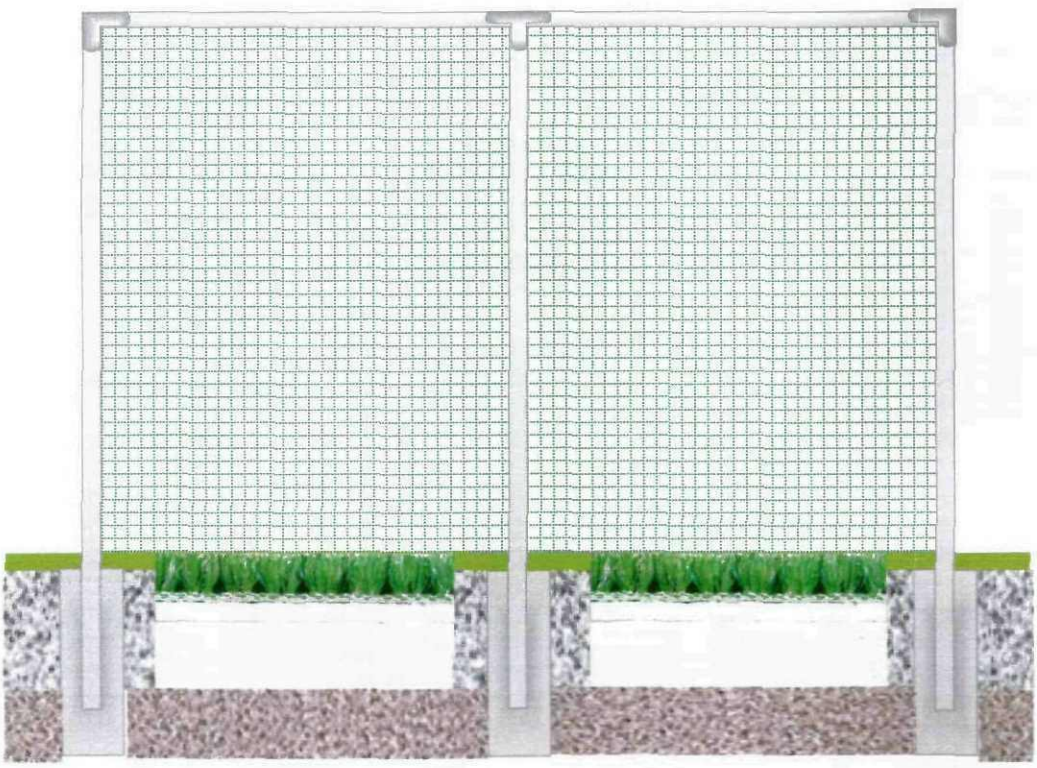

The structure complies with the sizes set out and approved by
The England and Wales Cricket Board (ECB).

The cage itself is of a heavy duty make up, meaning that the tubular galvanised steel used has a **minimum** diameter of 42.40mm and a **minimum** thickness of 3.20mm.
Cage sockets are set in concrete into the ground and form the permanent part of the semi-permanent structure.
The cage poles are then erected and fixed using a key clamp system. Heavy duty netting is then attached to the cage and supplied dark green in colour.

Structure Dimensions: Full length x 24' width x 12' height

Structure Make Up: Heavy Duty / Semi Permanent / Galvanised Steel

Netting: Heavy Duty / Green / Oil Based / Knotless

Ant - Corrosion Warranty: 7 years

nottssport®

Synthetic Surfacing / Cricket

ECB APPROVED PITCH SYSTEM SUPPLIER notts sport

Official Cricket Licensee Quotation (to be submitted for funding)

Hoylandswaine Cricket Club

HCC

South Yorkshire

Quotation Ref: RJK/DS1004780

Mr Roy Chapman
Hoylandswaine Cricket Club
c/o 51 Park Grove,
Barnsley,
South Yorkshire,
S70 1QA.

DURA-SPORT
synthetic sport & play surfaces

Notts Sport Non Turf Cricket Pitches

Preparation

Define area sized 32.5m x 8.12m. Set proposed falls and strip turf to a consistent depth of 150mm. Re-model surrounding ground in linto ensure a smooth transition onto the facility all in line with ECB technical specifications. Deposit all resultant spoil at pre-arranged point on site.

Synthetic Surfaces

Supply & Installation of 2no. 30m x 2.74m Notts Sport ECB Approved 'Envelope' System Practice Pitche, laid onto graded stone foundations, defined with 100mm x 50mm tannalised timber edge boards and surfaced with NottsWeave wilton woven carpet.
Supply & Install NottsSward CS900 surround carpet to the remaining area. CS900 laid onto clean graded stone foundation, defined with 100mm x 50mm tannalised timber boards and sand dressed at the applicable rate.

Cricket Cage

Supply & Installation of 1no. Twin bay cricket cage sized 25.62m long x 7.32m wide x 3.66m high. Cage constructed from fully galvanised tubular steel poles, ground sockets and key clamp fittings. Clad with 2.5mm Green Polyethylene Cord Netting to full roof and surrounds.

TOTAL: £28,500.00 + VAT

Dura-Sport Ltd, Unit C2, Chartwell Point, Chartwell Drive, Wigston, Leicestershire LE18 2FT.
Tel: 0116 2813 200 • Fax: 0116 2813 202 • E-mail: sales@dura-sport.co.uk • www.dura-sport.co.uk

DURA-SPORT

synthetic sport & play surfaces

Terms and Conditions of Sale:

30.00% deposit required with order. Accounts to be settled strictly within 28 days of invoice.
All prices are subject to VAT at applicable rate
Based upon one site visit only, additional visits will incur a surcharge
Client to provide site security for contract duration
Dura-Sport 'standard terms & conditions of sale' apply in all cases.
Quotation valid until 03 March 2011
Suitable works vehicle access required
Welfare and storage facilities to be provided by client
Assumes access is available directly onto the area
Excess aggregates and spoil to be deposited on site
Price assumes excavations in natural grass ground conditions
Quotation based on works being carried out during standard working week (Monday-Friday)

Quotation prepared by Richard Key on 23 December 2010

Signed Richard Key Digitally signed by Richard Key DN: cn=Richard Key, o=Dura-Sport Ltd, ou, email=rich@dura-sport.co.uk, c=GB Date: 2010.12.23 11:18:03 Z

Dura-Sport Ltd, Unit C2, Chartwell Point, Chartwell Drive, Wigston, Leicestershire LE18 2FT.
Tel: 0116 2813 200 • Fax: 0116 2813 202 • E-mail: sales@dura-sport.co.uk • www.dura-sport.co.uk

nottssport®
Synthetic Surfacing / Cricket

Notts Sport® Contact:

Primary Contact: Mr Lee Jacques
Notts Sport® Regional Sales Manager for Cricket

telephone: (01455) 883730
mobile: 07966 858008
e-mail: leej@nottssport.com

Lee has over 6 years experience within the industry and been a dedicated cricket manager for over 5 years, managing, designing, advising and specifying non-turf cricket projects on a varied scale through numerous market places, including Schools, Colleges, Universities, Cricket Clubs, Councils and private clients.

Notts Sport® is a family run business and the World's leading non-turf pitch supplier. The company was formed in 1984 and has delivered thousands of ECB Approved cricket pitches, facilities, systems and surfaces in that time.

Official Notts Sport® Cricket Licensee:

Dura – Sport Ltd

Unit C2
Chartwell Point,
Chartwell Drive,
Wigston,
Leicester,
LE18 2FT.

Primary Contact: Mr. Richard Key
Dura Sport Ltd - Commercial Director

Telephone: (0116) 2578013
e-mail: rich@dura-sport.co.uk
web site: www.dura-sport.co.uk

Richard has over 15 years experience in the industry. Both Richard and Dura Sport as a company have managed the construction of individual synthetic turf projects in excess of £400,000.

Dura Sport have worked exclusively with Notts Sport® and constructed thousands of Notts Sport® ECB Approved non-turf cricket facilities since 1994.

The company are principal SAPCA contractors, Construction Line members and CHAS accredited to provide additional peace of mind that your project is in safe hands.

nottssport®
Synthetic Surfacing / Cricket

Guarantees & Warranties:

Notts Sport® and their chosen Cricket Licensee will offer the Cricket Club the following warranties for the designed and agreed cricket facility and its components:

- 12 month constructional guarantee.
- 5 year material warranty.

Unique 5 Year Performance Guarantee:

Notts Sport® offer the following guarantee for a period of five years with respect to cricket pitch systems. Provided the specification and materials used are in line with Notts Sport® recommendations, the pitch will not permanently fall outside the parameters acceptable for cricket.

This warranty excludes failure due to changes in the sub-structure, caused by circumstances beyond the control of the company, including, but not limited to, changes in the moisture content of the sub-structure.

Material Warranty:

When used as a surface for cricket, the NottsWeave® superior wilton woven cricket playing surface is warranted for a period of five years, against:

- U.V. degradation
- fault due to manufacture of the fabric
- that the pile loss will not render the surface unsuitable as a cricket surface

This warranty is offered subject to maintenance of the pitch being carried out in line with Notts Sport® recommendations, and that the pitch and surface is not abused or maliciously damaged in any manner.

Any claim on this warranty is limited to the provision of replacement materials to enable the rectification of the fault, and is limited to the affected areas.

In addition to this...

all seams and joints are guaranteed for five years, and all cricket cages and perimeter fences carry an 7 year "anti-corrosion" warranty.

After Care Service

After one season of the facility being constructed, Notts Sport and Dura Sport will return to the club and carry out a full maintenance service on the facility, including cleaning, moss treatment, and a re screed and re tensioning of the surfaces if required.

This is carried out free of charge on our first visit and we actively encourage club members to view this work so that they can carry out their own after care following our visit.

A full completion pack will also be provided free of charge to the club detailing facility construction depths, costs, completion date, installer details, the names of the employees involved with the project as well as all maintenance documents and a project summary detailing before, during and completed facility photograph's.

nottssport®

Synthetic Surfacing / Cricket

General Overview of Installation:

The facility will be installed to the very latest TS6 Requirements and ECB guidelines.

All synthetic surfaces on view will be aesthetically pleasing and blend in with the surrounding environment.

The installed synthetic materials on view will be a shade of green and be installed flat within the proposed area with the use of laser levels.

The heavy duty cage structure specified is semi-permanent. The only permanent items of the structure are the ground sockets, which are concreted in below ground level. The cage structure is then installed and fixed using a key klamp system, which means it can be easily removed and stored away from the area during the close season, which aids planning permission.

The cage structure is clad with heavy duty polypropylene netting, which is oil based and will be dark green in colour. This will mean that the structure will blend into its surroundings and be aesthetically pleasing, which appeases planners. Again, the netting can easily be lifted and removed from the cage structure when not in use. Tensioned line wire is installed as standard along the bottom of the netting to prevent balls escaping between lanes.

