
Lightwood Cycle Shelter

BXMW/LIG



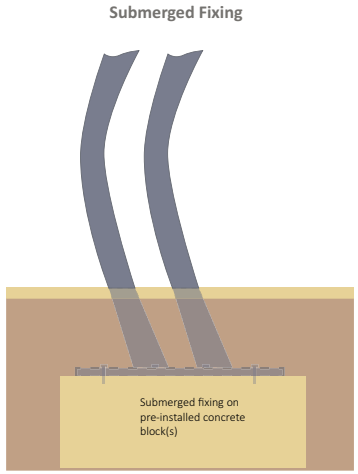

Standard Unit Dimensions
Width: 2500mm
Height: 2500mm

Length with Capacities

3600mm	8 cycles
4100mm	10 cycles
5000mm	12 cycles

Features
Robust modular construction
Load bearing purlins
Welded end frames
Made from heavy-duty mild steel box section
Assembled with anti-tamper high strength bolts
Anti-climb end frames
Adjustable baseplates
Hot dip galvanized to BS EN ISO 1461:2009
Weather resistant cladding

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire ST5 6BD
Tel: 01782 571660 • Email: shelters@broxap.com • Web: www.broxap.com

Specification Sheet

Lightwood Cycle Shelter
BXMW/LIG

Materials Used
Framework - Mild Steel
Cladding - 4 mm PETG uv
Fasteners - Zinc Plated
Cover Strips - Pre-galvanized steel flat


Finish Options
Hot-Dip Galvanized to BS EN ISO 1461:2009
Hot-Dip Galvanized & Polyester Powder Coated 60mm-120mm dft
Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance
Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance
Cladding is fire tested to '1Y' for BS 476

Design-Life, Guarantees & Warranties (terms apply)
25 year structural guarantee
34 year (min) life expectancy for Hot Dip Galvanizing
8-10 year life expectancy on standard powder coatings
10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
10 years manufacturers guarantee on cladding material
10 year warranty on product materials
12 year warranty on parts & labour

Installation

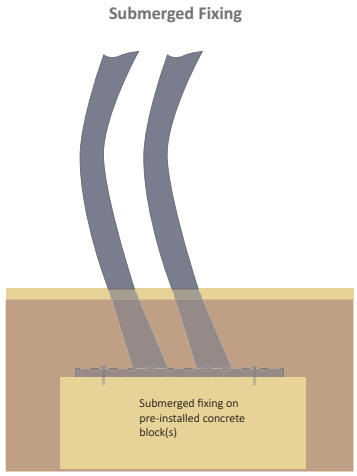

Options
Steel Profile, Trapezoidal roof cladding
Opal Cladding to Roof
Powder Coating to a wide range of colours
LED or solar lighting
Full Installation Service
Varied Range of Cycle Racks
Varied Range of Cycle Stands

Colours/Finishes



THE COLOURS SHOWN ARE A GUIDE ONLY. PLEASE CHECK A COLOUR CHART TO SEE THE ACTUAL COLOUR.

Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information)

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire ST5 6BD
Tel: 01782 571660 • Email: shelters@broxap.com • Web: www.broxap.com