







Key

- **Tree retention category A**
High quality with an estimated life expectancy of at least 40 years
- **Tree retention category B**
Moderate quality with an estimated life expectancy of at least 20 years
- **Tree retention category C**
Low quality with an estimated life expectancy of at least 10 years,
OR young tree with a stem diameter below 150mm
- **Group retention category C**
Low quality with an estimated life expectancy of at least 10 years,
OR young tree with a stem diameter below 150mm
- **Tree category U**
Poor condition with an estimated life expectancy of less than 10 years
- **RPA**
minimum Root Protection Area
- **Proposed Tree Removal**
Trees in the edge of groups G5 and G7 will need to be removed or cut back as required to facilitate development
- **Tree protection fencing**
see Detail 1 and method statement

Trees have been surveyed and categorized as per the recommendations and guidance in BS 5837:2012 Trees in relation to design, demolition and construction.

This drawing is to be read in conjunction with the Arboricultural Survey report.

This drawing is to be reproduced in colour.

ARBORICULTURAL METHOD STATEMENT


TREE PROTECTION FENCING

Tree protection fencing must be installed in the position as shown on the Tree Protection Plan before any other works on site can be undertaken.

Tree Protection Fencing should be set out as per Section 6.2 of BS5837: 2012 and will comprise a scaffold framework, consisting of vertical and horizontal scaffolds with vertical tubes spaced at a maximum of 3m intervals and driven securely into the ground. Weld mesh (Heras or similar) panels will be securely fixed on to this framework with scaffold clamps. Tubes will be firmed into holes in the ground made with post hole boring equipment. Bracing poles will be fixed to the inside of the barrier to ensure maximum rigidity, and should be located to avoid contact with structural roots.

See Detail 1 for details of the protective fencing to be employed in all circumstances, where existing site conditions allow. Fencing is to be erected as shown on the drawing. All fencing must be fixed in position with driven scaffold poles so that they cannot be moved during the construction period.

All-weather notices, A4 size, shall be attached to the tree protection fencing every 10m at 1.5m high with the words: 'Tree Protection Fence—strictly no access'.

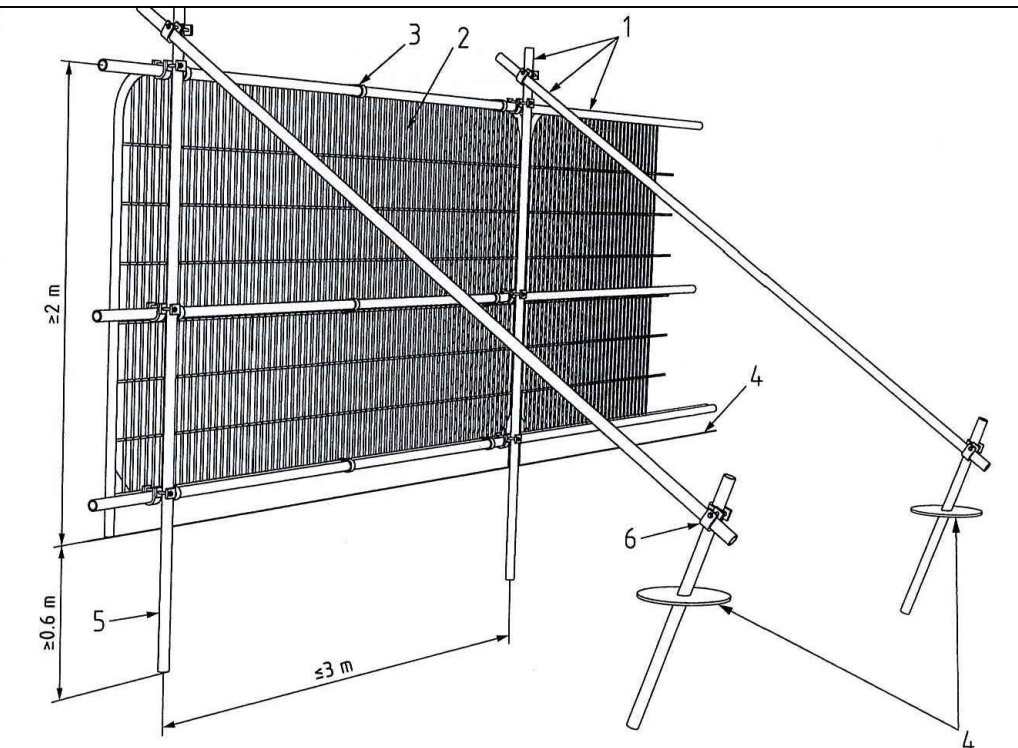

- Key
- Standard scaffold poles
 - Heavy gauge 2 m tall galvanized tube and welded mesh infill panels
 - Panels secured to uprights and cross-members with wire ties
 - Ground level
 - Uprights driven into the ground until secure (minimum depth 0.6 m)
 - Standard scaffold clamps

Detail 1 - Tree Protection Fencing (NTS)

FOR INFORMATION

-	-	-	-
Rev.	Date	Comments	Drawn Chkd

SMEEDEN FOREMAN
Landscape Architecture • Ecology • Arboriculture

Somerset House, Low Moor Lane, Scotton, Knaresborough, North Yorkshire, HG5 9JB
www.smeedenforeman.co.uk tel: 01423 863 369

Project			Ashroyd Business Park, Plot 3
Title			Tree Protection Plan
Project No. SF 3476	Drawing No. TPP01	Rev.	-
Scale 1:500 @ A1		Date 08.01.24	
Drawn by DR		Checked by MS	

The details shown on this drawing are confidential and the drawing is the exclusive property of Smeeden Foreman Limited. Copyright reserved. No use, copy or disclosure of the drawing may be made without our permission and it is to be returned to Smeeden Foreman Limited when required.

Smeeden Foreman Limited take no responsibility for the use of this drawing for any purpose other than for that which it was intended.

All dimensions are in millimeters unless stated otherwise.

All dimensions should be verified on site prior to commencement of works.

Do not scale from this drawing.

All works must be in accordance with British Standards, EC Standards, Health & Safety at work act & all other relevant regulations & Bye Laws.

Any discrepancies should be brought to the attention of Smeeden Foreman Limited.