

**TREE PROTECTION MEASURES  
PROPOSED EXTENSION WORKS**

**2 THE RIDINGS , MONKBRETTON,  
BARNSELEY, S71-2EZ**

**NYP REF. 2025-40-TP01**

**OCT 2025**

## **TREE ROOT PROTECTION AREAS**

**Sequencing:** Before the commencement of any works on site (other than those set out in the schedule of tree works contained in this document), protective fencing shall be erected in the positions shown on drawing 2025-40-TP01. Once the fencing is in place it shall be inspected and signed off by the site agent.

The Tree Protection Plan shows the alignment of **Tree Protection Fencing (TPF)**. This fencing comprises a single type as TPF 3 as attached detail.

### **All TPF shall be installed prior to any of the following taking place:**

- **Plant and materials delivery**
- **Demolition**
- **Soil stripping**
- **Construction works**
- **Utility installation**
- **Landscaping**

Hereafter, the above listed operations are collectively referred to as '**development**'. Once installed, permanent TPF Types 1 shall not be taken down or relocated at any time.

## TREE PROTECTION FENCING

**Type 1 Tree Protection Fencing (TPF1)** as attached detail, which is suitable for areas of high intensity development, shall comprise interlocked Heras panels, well-braced to resist impacts by attachment to a scaffold framework that has been set firmly driven into the ground and braced as appropriate. The scaffold framework shall comprise top and bottom horizontal bars with uprights set into the ground at no less interval than one per panel. Sloping bars as braces, perpendicular to the line of the fence, shall be fixed to the top rail and set into the ground; these shall be spaced at no less an interval than one brace per two panels. Where conditions prevent post being driven the TPF will be a solid style hording supported on concrete posts cast into the ground; the holes will be lined with an impermeable / plastic layer to prevent leachate.

- **Type 3 Tree Protection Fencing (TPF3)**, which is only suitable for areas of low-intensity development, shall comprise 1.2m high cleft chestnut paling, securely mounted onto firmly driven wooden posts.

All fencing shall be maintained in good, robust and effective condition until all development has been completed, and shall then only be removed once all plant, materials and site compounds have been removed, i.e. when the site is ready for hand-over to the end user.

All fencing shall be wired together to prevent dismantling or aid easy access. The fencing shall remain in place until completion of the main construction phase.

**Signage:** To inform site personnel of the purpose of the fencing, information notices shall be fixed to the fencing at approximately 5m intervals on all TPF. These notices shall be of all- weather construction and shall be in the form of the specimen attached for copying.

## **PROHIBITIONS ADJACENT TO TREES**

**General:** No works including storage or dumping of materials shall take place within the exclusion zones defined by the protective fencing.

In addition to the above, further precautions are necessary adjacent to trees:

- A 10m separation distance shall be observed between any tree and substances injurious to tree health, including fuels, oil, bitumen, cement (including cement washings), builders' sand, concrete mixing and other chemicals.

## **AVOIDING DAMAGE TO STEMS AND BRANCHES**

**General:** Care shall be taken when planning site operations in proximity to trees to ensure that wide or tall loads or plant with booms, jibs and counterweights can operate without coming into contact with retained trees. Such contact can result in serious injury to them and might make their safe retention impossible.

Consequently, any transit or traverse of plant in proximity to trees shall be conducted under the supervision of a banksman; to ensure that adequate clearance from trees is at all times maintained. In some

circumstances, it may be impossible to achieve this, necessitating tree pruning. This is known as 'access facilitation pruning'.


## **SUPERVISION AND MONITORING**

The site agent shall inspect the protective fencing daily.

**Reporting damage to trees and tree protection fencing.** Shall any damage occur to trees this shall be reported to the site agent immediately.

The site agent shall report up the chain of responsibility to the client, to allow any remedial measures to be implemented as necessary.

If fences become damaged so as to impair their function in protecting trees, all work shall cease in the vicinity of the damage until the fence has been returned to standard.

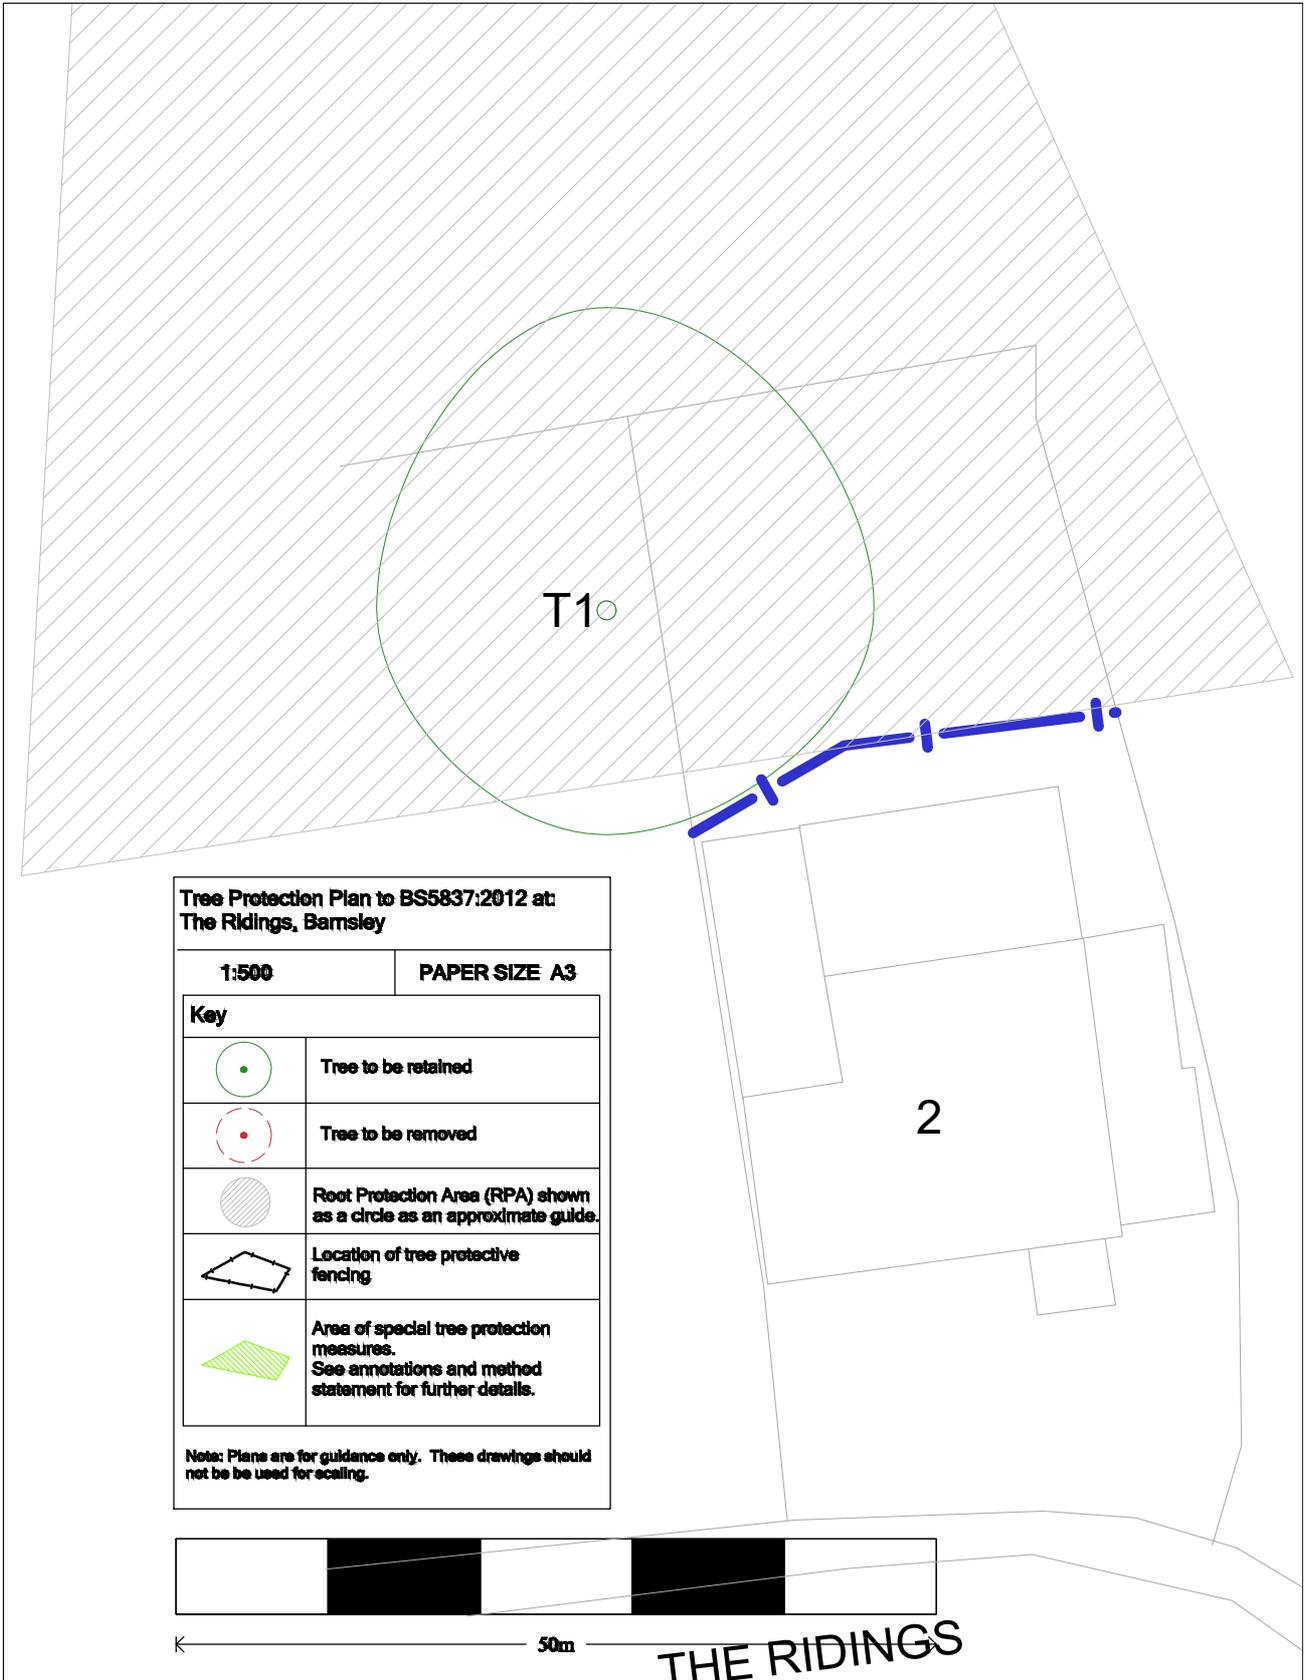

**Tree Protection Plan to BS5837:2012 at  
The Ridings, Barnsley**

<b>1:500</b>	<b>PAPER SIZE A3</b>
<b>Key</b>	
	Tree to be retained
	Tree to be removed
	Root Protection Area (RPA) shown as a circle as an approximate guide.
	Location of tree protective fencing
	Area of special tree protection measures. See annotations and method statement for further details.
<p><b>Note:</b> Plans are for guidance only. These drawings should not be used for scaling.</p>	

THE RIDINGS

**NYP**  
ARCHITECTURAL  
LTD

Project.  
**2 THE RIDINGS  
MONKBRETTON  
BARNSELY  
S71-2EZ**

Drawing Title.  
**TREE PROTECTION**

Client.  
Date. **OCTOBER 2025**  
Scale. **1:500**

Ref. **2025-40**  
Dwg. No. **TP01**

Rev.

BBIC, INNOVATION WAY, BARNSELY, S75 1JL.  
Tel: 01226 200989. E: scott@nypas.co.uk

## TREE PROTECTION FENCING TPF 1


### 9.2 Barriers

**9.2.1** Barriers should be fit for the purpose of excluding construction activity and appropriate to the degree and proximity of work taking place around the retained tree(s). On all sites, special attention should be paid to ensuring that barriers remain rigid and complete.

**9.2.2** In most cases, barriers should consist of a scaffold framework in accordance with Figure 2 comprising a vertical and horizontal framework, well braced to resist impacts, with vertical tubes spaced at a maximum interval of 3 m. Onto this, weldmesh panels should be securely fixed with wire or scaffold clamps. Weldmesh panels on rubber or concrete feet are not resistant to impact and should not be used.

*NOTE* the above is preferred because it is readily available, resistant to impact, can be re-used and enables inspection of the protected area.

**9.2.3** It may be appropriate on some sites to use temporary site office buildings as components of the tree protection barriers.

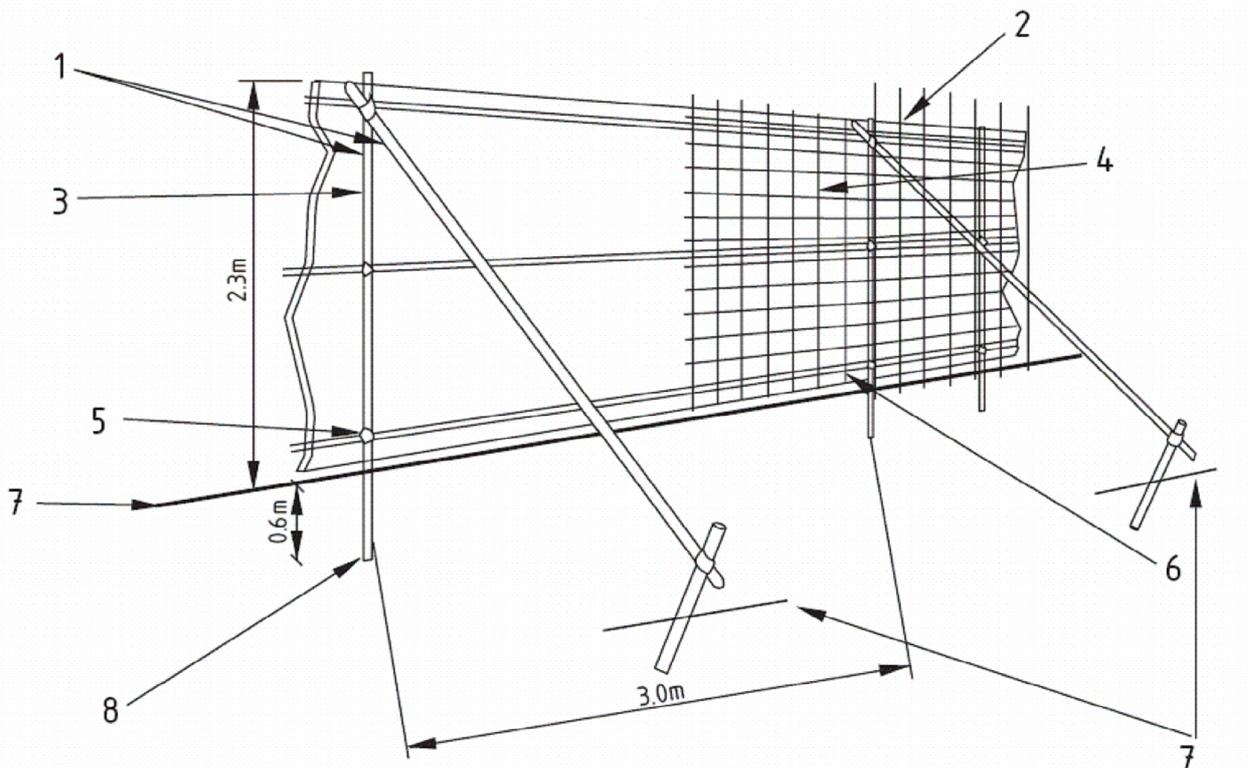


- |  |  |
|--|--|
| 1 Standard scaffold poles  | 5 Standard clamps  |
| 2 Uprights to be driven into the ground  | 6 Wire twisted and secured on inside face of fencing to avoid easy dismantling |
| 3 Panels secured to uprights with wire ties and where necessary standard scaffold clamps | 7 Ground level   |
| 4 Weldmesh wired to the uprights and horizontals   | 8 Approx. 0.6 m driven into the ground   |

**Figure 2 — Protective barrier**


TREE PROTECTION FENCING TPF 3

TPF 3 - in low importance areas a reduced level of fencing can be used to control access, an example is shown below.

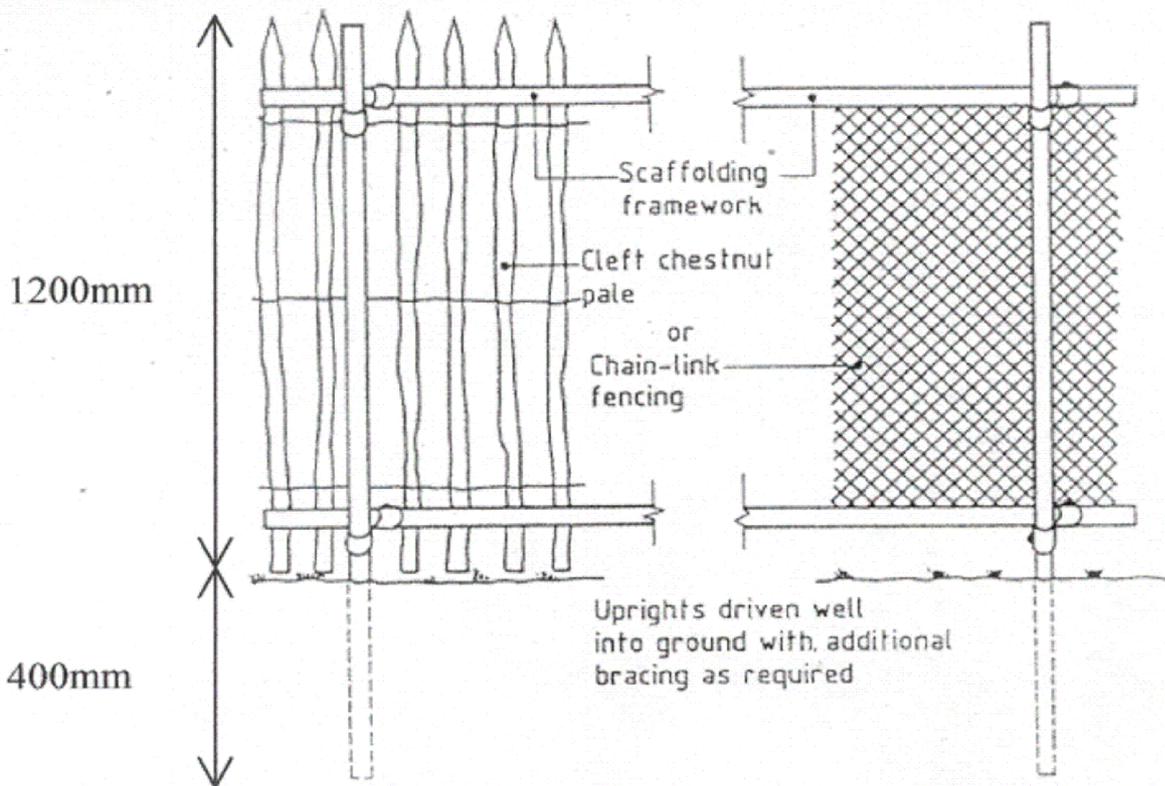

The fencing should be at least 1.2 metres in height, comprising a vertical and horizontal framework of scaffolding, well braced to resist impact, supporting Cleft Chestnut or Chain Link netting or similar as shown above. The fence should display warning signs with the wording "Root Protection Area – Strictly No Entry" a suggested sign is included below. Refer to tree schedule minimum distance of protective fencing

**Tree Protection Signage**

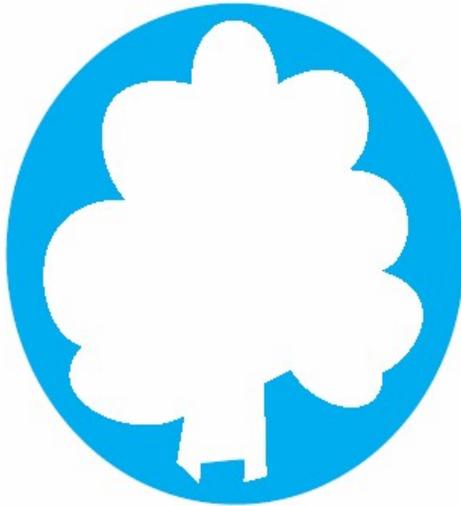

**PROTECTIVE FENCING. THIS  
FENCING MUST BE  
MAINTAINED IN ACCORDANCE  
WITH THE APPROVED PLANS  
AND DRAWINGS FOR THIS  
DEVELOPMENT.**



**TREE PROTECTION AREA  
KEEP OUT !**

**(TOWN & COUNTRY PLANNING ACT 1990)  
TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY  
PLANNING CONDITIONS AND/OR ARE THE SUBJECTS OF A  
TREE PRESERVATION ORDER.  
CONTRAVENTION OF A TREE PRESERVATION ORDER MAY  
LEAD TO CRIMINAL PROSECUTION**

**ANY INCURSION INTO THE PROTECTED AREA MUST BE  
WITH THE WRITTEN PERMISSION OF THE LOCAL  
PLANNING AUTHORITY**

**TREE PROTECTION ZONE:**

**KEEP OUT!**

**NO DIGGING OR TRENCHING  
NO STORAGE OF PLANT OR MATERIALS  
NO VEHICLE ACCESS  
NO FIRE LIGHTING  
NO CHEMICAL HANDLING  
AVOID PLANT CONTACT WITH TREE CANOPY  
REPORT ANY DAMAGE  
TO TREES OR FENCING IMMEDIATELY**