

Arboricultural Impact Assessment (AIA) Version 2

Barnsley
Prepared for: Exemplar

Prepared by Simon Brain *Chartered arboriculturist*

Contents

1.0 Introduction (Instruction, Scope, Methodology, Mitigation & Limitations)	3-4
2.0 Arboricultural Impact Assessment.....	5-8
3.0 Tree Preservation Orders	8
4.0 Trees to be removed and retained	8-9
5.0 Root Protection Areas (RPA)-modifications	9-10
6.0 Post construction considerations	10
7.0 Tree pruning to facilitate development and future pruning	9
8.0 New surfacing and ground level modifications	9
9.0 Construction Exclusion Zones and Special Measure Areas	9
10.0 Site supervision and monitoring	9-10
11.0 Installation of below ground infrastructure (utilities)	10
12.0 Design changes	11
13.0 Amenity Value	12
14.0 Concluding statement	12

Appendix

- 1 Tree Protection Plan
- 2 Survey sheets (updated as a result of AIA)

1.0 Introduction

1.1 Instruction, Scope, Methodology, Mitigation & Limitations

- 1.2 My name is Simon Brain, I am a chartered arboriculturist, with 25 years' experience holding the LANTRA Professional Tree Inspection certificate. I have been instructed by the client to prepare the following Arboricultural Impact Assessment for the site at Barnsley.
- 1.3 This Arboricultural Implications Assessment (AIA) is based on the proposed developments as shown on the Proposed Site plans and incorporated into the Tree Protection Plans (TPP) in Appendix 1 of this report.
- 1.4 The assessment will be carried out in line with the recommendations in BS 5837:2012 *Trees in relation to design, demolition and construction – Recommendations* and will evaluate the direct and indirect impacts of the proposed design and where necessary recommend mitigation.
- 1.5 The AIA considers constraints posed above and below ground and where appropriate makes recommendations to mitigate impacts associated with development sites and retained trees.
- 1.6 Where specialist design, construction techniques or in areas where supervision of the works is required a Special Measure Area (SMA) has been shown on the TPP for the study areas.
- 1.7 Below ground constraints are influenced by the root protection area and are determined in line with the recommendations set out in BS 5837:2012. These recommendations quantify the root protection area based on a measured stem diameter in accordance with Annex C, and the root protection area determined from Annex D.
- 1.8 It is important to understand that when considering the Root Protection Area (RPA) with regards to the circular plot as delineated on the TPP

that a number of site factors can influence root morphology and disposition of tree roots.

- 1.9 Above ground constraints are considered above and below ground and in line with the recommendations in BS 5837:2012 to include; shade, dominance, current and future crown spread as well as the ultimate height of those retained trees.
- 1.10 Impacts associated with development sites and retained trees can be associated with single or multiple site operations that can subject trees to multiple impacts (*root severance, compaction, loss of photosynthetic material*), where this is applicable it will be highlighted in the AIA.
- 1.11 The mitigation measures proposed in this report are essential to ensure that trees marked for retention are adequately protected during the period of post/preconstruction.

2.0 Arboricultural Impact Assessment

2.1 Area for proposed development

2.2 The proposed development has been embedded within the Tree Constraints Plan which indicates the following developments associated with this site to have an arboricultural impact:

- Installation of proposed development infrastructure requiring tree removal

2.3 The arboricultural impacts of these items have been identified below.

2.3.1 Installation of proposed development access requires the removal of the following tree references:

- G1

3.0 Tree Preservation Orders

3.1 We have not checked with Council over Conservation Area or Tree Preservation Order and if they apply to this site.

4.0 Trees to be removed and retained

4.1 The following trees have been identified for removal due to their condition (Category U): None

4.2 A total of one tree group are identified to be removed for the direct impact of development as listed in section 2.3.2.

4.3 The remaining trees are due to be retained and protected as outlined on the TPP by methodology needed in an AMS.

5.0 Root Protection Areas (RPA)-modifications

5.1 Root Protection Areas have been plotted in line with the guidance given in BS 5837: 2012 where ground constraints have had or are likely to effect the root morphology of trees e.g. where underground utilities or

building foundations have obstructed root growth this shall require formal confirmation by excavation to establish presence or absence of significant rooting material. No RPA modifications have been shown for this scheme.

6.0 Post construction considerations

6.1 Not applicable

7.0 Tree pruning to facilitate development and future pruning

7.1 There are requirements for minor levels of tree pruning to facilitate the proposed development.

8.0 New surfacing and ground level modifications

8.1 No new surfacing is required in RPA of retained trees.

9.0 Construction Exclusion Zones and Special Measure Areas

9.1 The Construction Exclusion Zone has been shown as a black fenced polyline on the TPP in Appendix 1 and shall be constructed using heras panels and rubber feet securely staked to the ground.

9.2 The CEZ is purposefully located within proposed new surfacing near TPO trees in order to prompt site supervision and wider protective measures when new surfacing is installed.

9.3 The CEZ must be installed as signed off as fit for purpose before any other works commence on site.

10.0 Site supervision and monitoring

10.1 Where a tree has been delineated on the TPP as requiring retention there will be a requirement to oversee construction operations in these areas in order to ensure that no damage occurs to the retained tree.

10.2 To ensure that there is an auditable system of site monitoring, reports will be compiled by an appointed arborist and following site visits they issued to the site manager and design team, copies of which will be available on site at all times for inspection by a Council planning/Tree officer.

11.0 Installation of below ground infrastructure

11.1 No detailed plans have been provided specifying the location of site utilities

11.2 Specialist advice with regards to the position of utilities will need to be sought from engineers and must be reviewed by the consulting arboriculturist prior to commencement on site.

11.3 The usual construction techniques for installing site utilities within an RPA will be unacceptable due to the level of root severance that would occur. The impact of root severance will have a detrimental effect on tree health as trees require a healthy root system in order to maintain water and mineral uptake from the soil. Trees need to maintain a balance between shoot and root growth to ensure that the resources supplied by each can meet the demand of the other. Severance of tree roots caused by trenching can lead to reduced water uptake which in turn impacts on the trees ability to supply water to the canopy, resulting in desiccation. A further complication associated with root severance can be problems associated with tree stability. The tree relies on an intact root system in order to maintain stability; this stability will be compromised by root severance.

11.4 The use of trenchless techniques can be acceptable provided the depth of service run that is excavated is below the anticipated root depth.

12.0 Design change requirements

12.1 Design change requirements have not been necessary.


13.0 Amenity Value

It is considered that the successful establishment of replacement trees shall mean an improvement in the long term wider visual public amenity associated with the trees on this sites.


14.0 Concluding statement

- 14.1 The proposed scheme was assessed in line with guidance provided in BS 5837:2012 *Trees in relation to design demolition and construction – Recommendations* with the aim to achieve a harmonious relationship between trees and structures that can be sustained in the long term.
- 14.2 It is my professional opinion as an arboriculturist that no trees are worthy of retaining and that greenspace planning is best achieved by the provision of a robust tree planting scheme.

Appendix 1 Tree Protection (removal) Plan

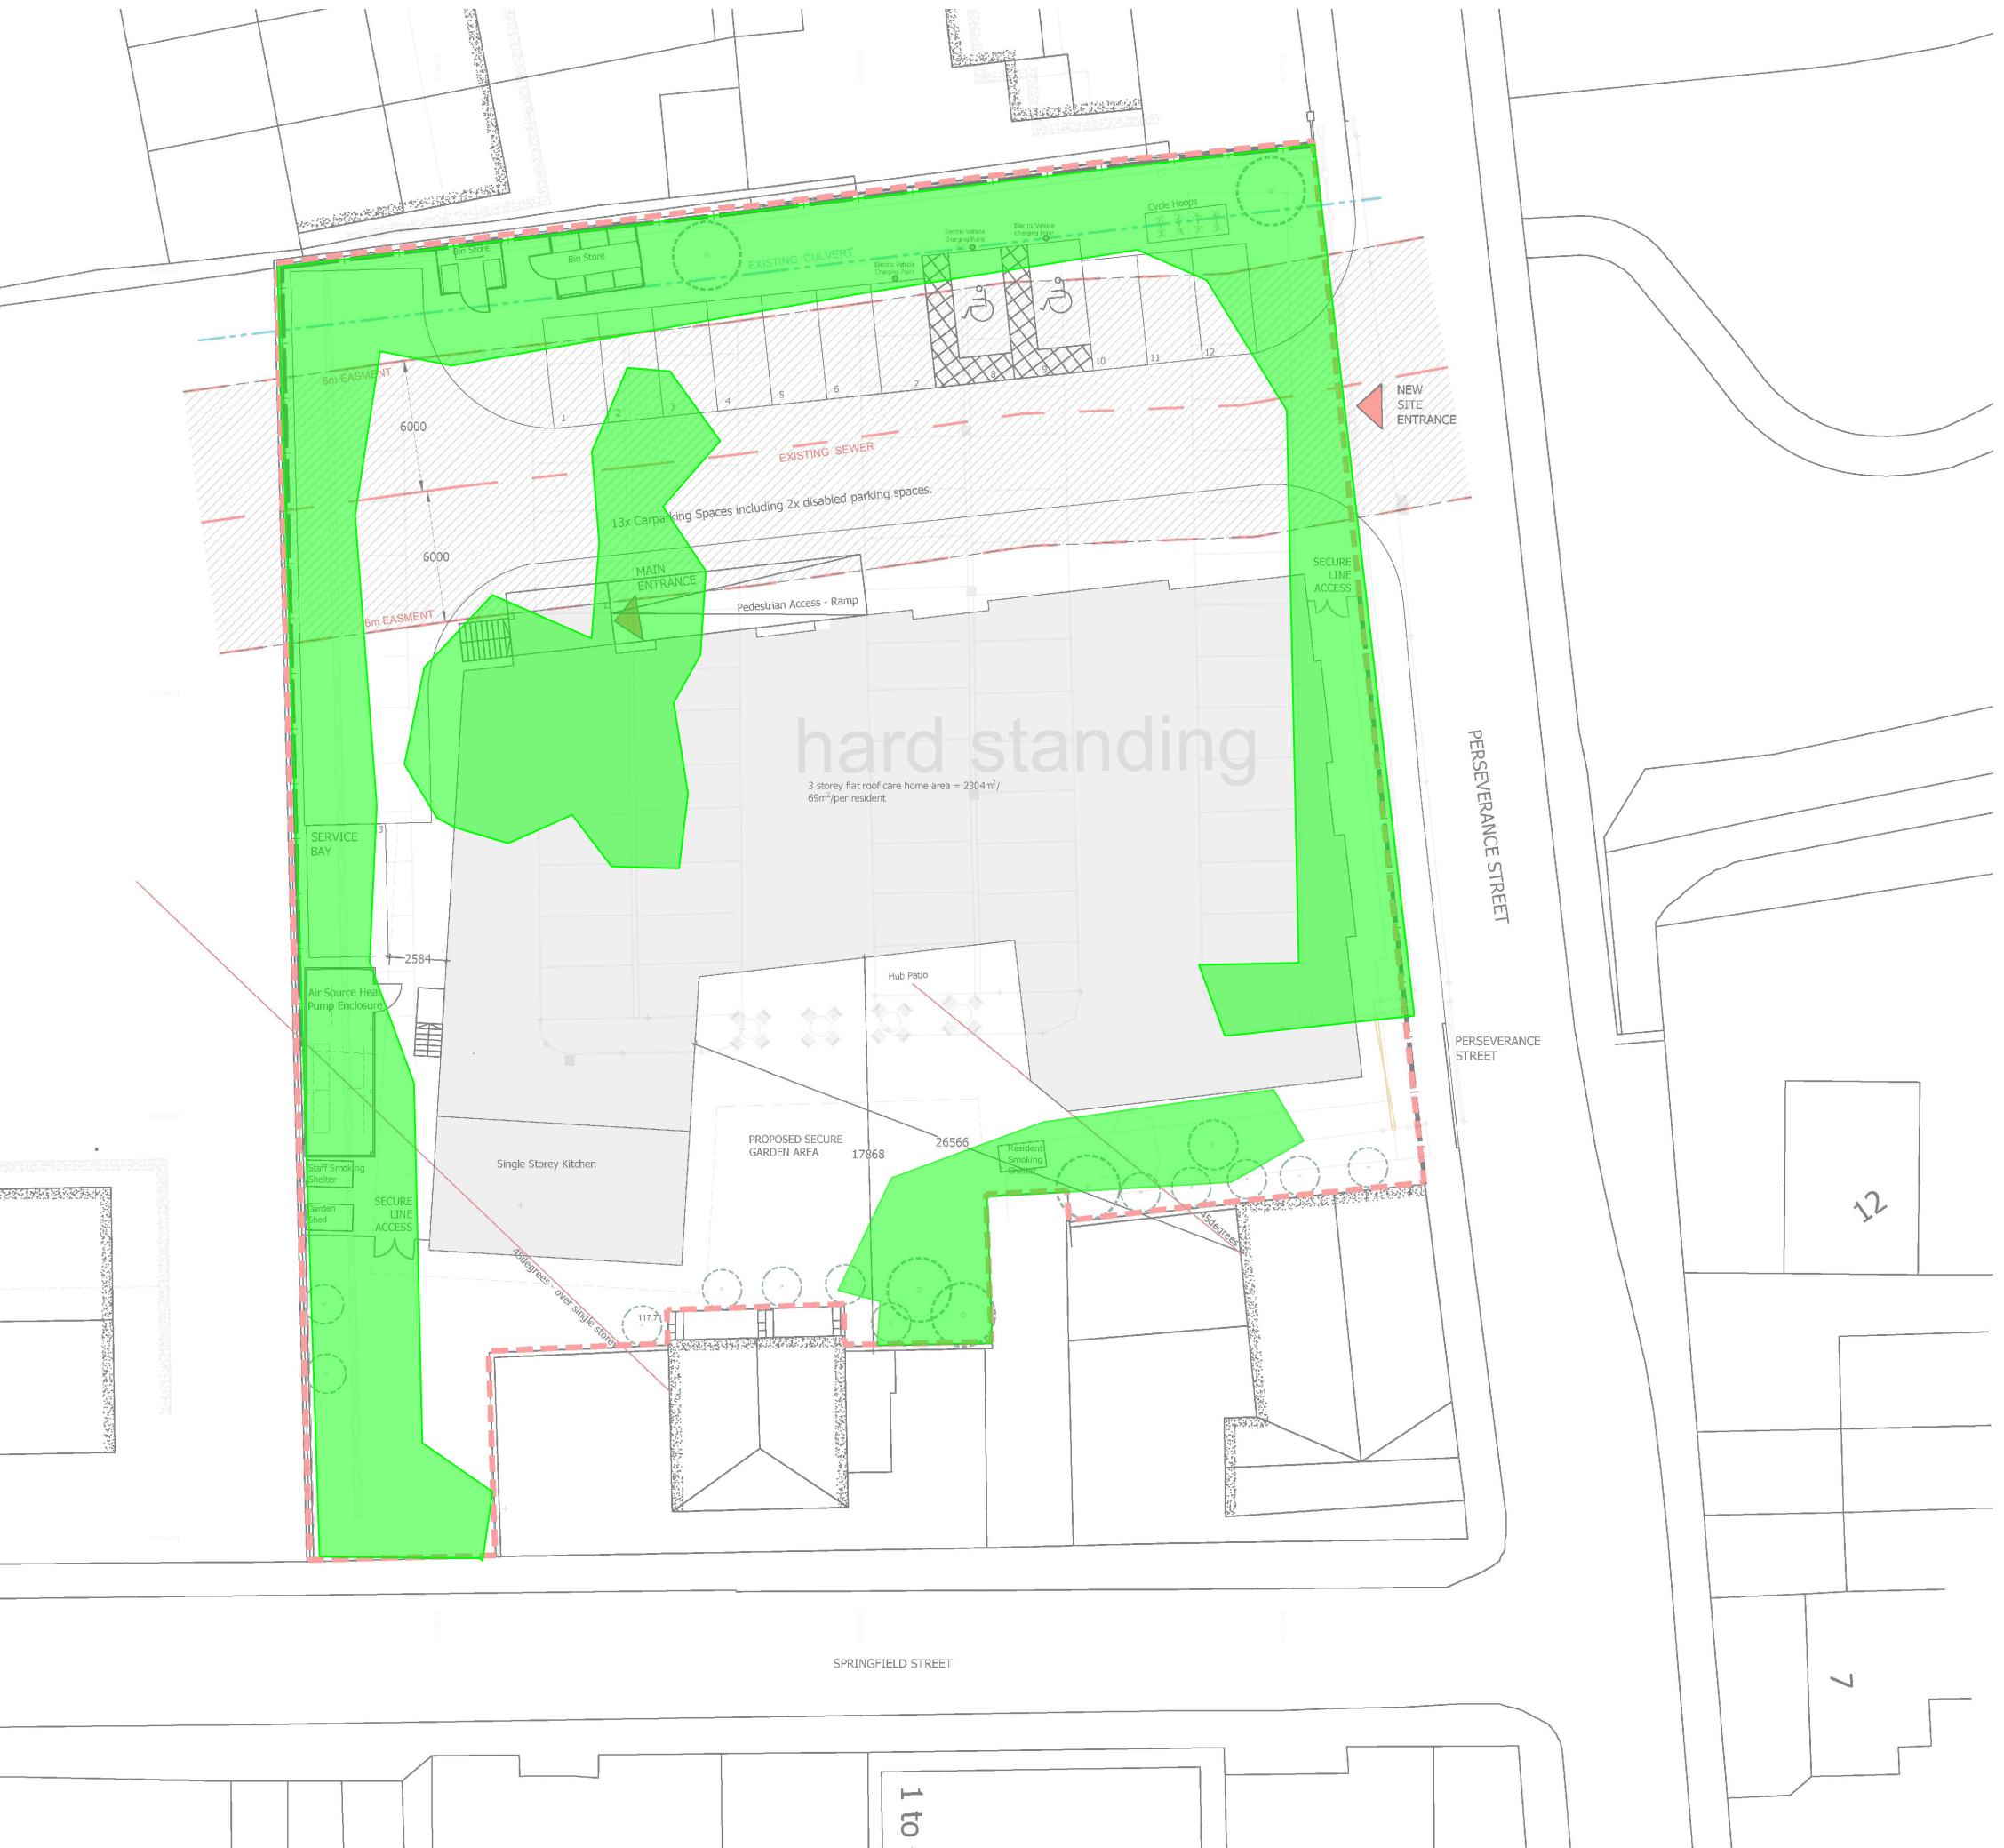

TREE PROTECTION / REMOVAL PLAN

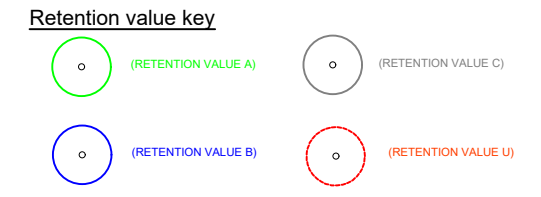

Root Protection Areas (RPA) & Construction Exclusion Zones (CEZ)

Root Protection Areas (RPA's) have been identified and are based on BS5837:2012. RPA's and Construction Exclusion Zones (CEZ) have been shown as detailed below. The CEZ shall act as the protective barrier for retained trees.

Removed trees shown dashed



Client:		
Exemplar Healthcare		
Project:		
Barnsley		
Detail:		
Tree removals		
Drawn By:	Date:	Scale:
SB	11.04.2024	NTS
Drg No:	Revision:	
TR-01	V1	

Tree No.	Common Name	Life Stage	Diameter(mm)	Stems	Height(m)	Crown Height(m)	North(m)	South(m)	East(m)	West(m)	Category	Estimated Remaining Life Expectancy (yrs)	Comments	Recommendations following AIA	RPR(m)
G1	Ash, Goat Willow,	Y	50	1	4	2	1	1	1	1	C1	40+	Regeneration of low value	Remove and replace	0.6