
NOTES:

1. New Ø770mm internally illuminated projecting sign
2. New 400mm high individual internally illuminated letters
3. New dome type CCTV camera 2.5m above GL
4. Back panel fascia of champagne colour coated aluminium
5. Surrounds to new ATMs
6. Make good & clean landlords tiled finish to pilasters*
7. Security glazing with Black Blue film applied internally
8. Internal through-the-glass letterbox with vertical face plate mounted externally
9. Internally applied vinyl 'nameplate' & window manifestation
10. Stainless steel clad stallriser to accommodate floor level

ALL DRAWINGS MUST BE READ IN CONJUNCTION WITH THE MAIN CONTRACTORS SCOPE NOTES FOR FULL DETAILS

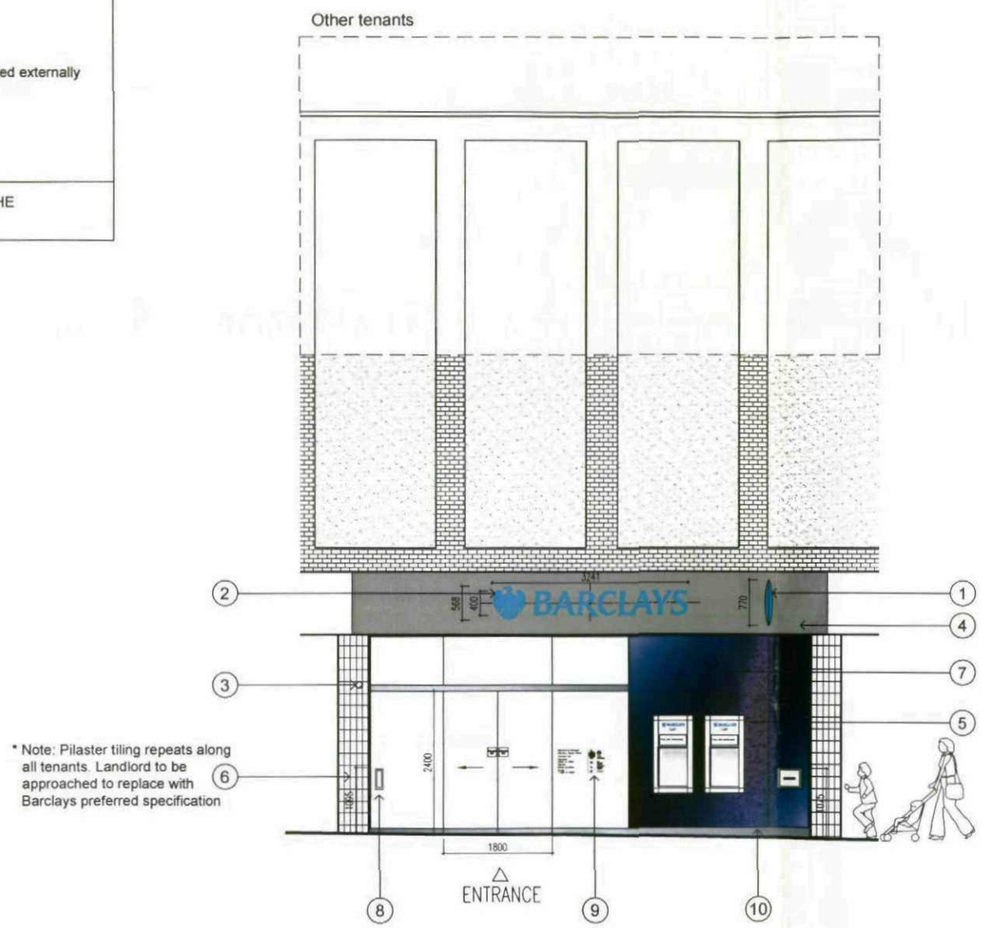

* Note: Pilaster tiling repeats along all tenants. Landlord to be approached to replace with Barclays preferred specification

This elevation has not been created from a scaled CAD drawing.
A full measured survey is recommended before works commence.

SCALE
0 1m 5m 10m

REDLINE

NOTE
This drawing has been prepared from historical information that cannot be guaranteed accurate
Responsibility is not accepted for errors made by others in scaling from this drawing. All construction information should be taken from figured dimensions only.
All dimensions should be checked on site prior to the manufacture of any components

HATCHING

- New Secure partition wall
- New Fire Resistant Secure Partition wall
- New Partition wall
- New Fire Resistant Partition wall
- Book Room Secure wall
- Existing Partition wall
- Solid wall
- Dry Lining
- Amtico Stone Effect Flooring
- Amtico Steamed Ash Flooring
- Barrier matting
- 2008 Hard Flooring 1200x600
- 2008 Hard Flooring 600x300
- Area not in scope

NOTE: No services should pass through or over the Boxes & Parcels room

NOTE: No sprinklers to be located in the Comms room

DATE:	REV	DRAWN	CHECKED	NOTES.


S&W Design
4th Floor
99 Charterhouse Street
London EC1M 6HR
t: +44 0 20 7014 0400
f: +44 0 20 7014 0401
www.stylesandwood.co.uk

Project
BARNSLEY
UNIT 2 10/18 QUEEN STREET
BARNSLEY
SOUTH YORKS S70 1RJ
PIM No.

BARCLAYS


Drawing Title
FRONT ELEVATION
PROPOSED
ACQUISITION REMODEL 2012

Branch Sort Code	Branch ID	Supplier Project No	
		D9680	
Scale	Drawn	Checked	Date
1:100@A3	KMT	SN	18/04/12
Drg.No D9680 400			Revision -
Barclays FM Project No.			

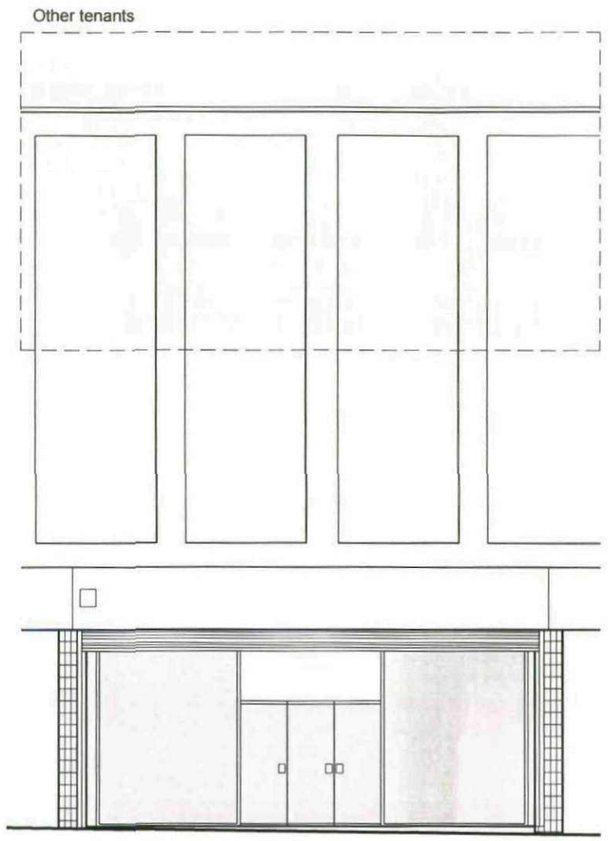

This elevation has not been created from a scaled CAD drawing.
A full measured survey is recommended before works commence.

SCALE



NOTE
This drawing has been prepared from historical information that cannot be guaranteed accurate
Responsibility is not accepted for errors made by others in scaling from this drawing. All construction information should be taken from figured dimensions only.
All dimensions should be checked on site prior to the manufacture of any components

HATCHING

- New Secure partition wall
- New Fire Resistant Secure Partition wall
- New Partition wall
- New Fire Resistant Partition wall
- Book Room Secure wall
- Existing Partition wall
- Solid wall
- Dry Lining
- Amtico Stone Effect Flooring
- Amtico Steamed Ash Flooring
- Barrier matting
- 2008 Hard Flooring 1200x600
- 2008 Hard Flooring 600x300
- Area not in scope

NOTE: No services should pass through or over the Boxes & Parcels room

NOTE: No sprinklers to be located in the Comms room

DATE:	REV	DRAWN	CHECKED	NOTES:

S&W Design
4th Floor
99 Charterhouse Street
London EC1M 6HR
t: +44 0 20 7014 0400
f: +44 0 20 7014 0401
www.stylesandwood.co.uk

Project

BARNSLEY

UNIT 2 10/18 QUEEN STREET
BARNSLEY
SOUTH YORKS S70 1RJ
PIM No.

BARCLAYS

Drawing Title

FRONT ELEVATION
EXISTING
ACQUISITION REMODEL 2012

Branch Sort Code	Branch ID	Supplier Project No
		D9680

Scale	Drawn	Checked	Date
1:100@A3	IR	SN	17.04.2012

Drg.No	Revision
D9680 300	-

Barclays FM Project No.