



ARMITAGE (UK) LTD
TREE SURVEY
LAND OFF INBIRCHWORTH RD/
WORK BANK LANE
THURLSTONE

CONTENTS

Page 1.	Introduction
1.a	Consultant
1.b	Purpose of Report
1.c	Terms of Reference
Page 2.	The Site and the Inspection
2.a	Background
2.b	Tree Status
2.c	Method of Inspection
Page 3.	Explanation of Terms and Abbreviations
Page 4.	Colour Coded Key
Page 5-7	Tree Survey
Page 8.	
8.a	Tree Removal and Surgery
8.b	Site Inspections
Page 9.	
9.a	Protective Fencing around Trees
9.b	Additional precautions outside fenced areas
Page 10.	Precautions in Respect of Temporary Work
Page 11.	
11.a	Tree Root System
11.b	Prevention of Damage to Roots
Page 12.	
12.a	Services
12.b	No Dig Construction
Page 13.	General Site Organisation
13.a	Working Area
13.b	Phasing of Construction
Page 14.	
14.a	Removal of Protective Fencing
14.b	Post Construction Remedial Work to Trees
14.c	Completion Meeting
Page 15.	General Guidelines
Page 16.	Contact Numbers

**TREE SURVEY
LANE OFF
INBIRCHWORTH RD/
WORK BANK LANE
THURLSTONE**

Our Ref: AA/JEA/500
14 September 2007

1.

INTRODUCTION

1.a CONSULTANT

My name is Adrian Armitage and I have the National Diploma in Horticulture/Arboriculture and the Arboricultural Associations Technical Certificate in Arboriculture. I also have the Royal Forestry Society Certificate in Arboriculture and the National Certificate in Horticulture.

I have worked in the arboricultural industry since 1978 and have wide range of experience. I have dealt with trees with Tree Preservation Orders, Building Society and Insurance work, Subsidence claims, Planning Appeals and Public Inquires.

1.b PURPOSE OF REPORT

A report is needed at the above location to give detailed arboricultural advice on the trees present and to give specific recommendations on necessary arboricultural work.

1.c TERMS OF REFERENCE

I was instructed by Mr & Mrs Walker to visit the site and prepare my findings in a report.

2. THE SITE AND THE INSPECTION

2.a BACKGROUND

The site is an area of land at the corner of Ingbirchworth Road and Work Bank Lane and is currently part of the garden of Springfield House. The trees are situated mainly around the site boundaries.

Mr Walker has requested an accurate tree survey be provided to act as a supporting document for a planning application to be considered by Barnsley M.B.C. The tree survey will be carried out in accordance with British Standard Recommendations 5837, clause 5.1 and 5.2, "trees in relation to construction".

The site plan attached shows the location of the trees surveyed.

2.b TREES STATUS

The trees on this site are subject to conservation area restrictions so are protected by the Local Authority. No work can be carried out without prior permission from the Planning Department, tree section.

2.c METHOD OF INSPECTION

The inspection of the trees was carried out at ground level using visual assessment of the trees canopy, stem and rooting area.

3.

Explanation of Terms and Abbreviations

- Age Class:** Y = Young
S/M = Semi-Mature
M = Mature
O/M = Over-Mature
- Height:** This is measured approximately in metres.
- D.B.H.:** This is Diameter at Breast Height and is measures in metres.
- Spread:** This is measured at the crowns widest point in metres.
- Cond:** The trees condition. G = Good, F = Fair and P = Poor.
- Vigour:** The trees rate of growth. Vig = Vigourous, Ave = Average and L = Low.
- Form:** Relates to the trees shape and appearance. G = Good, F = Fair and P = Poor
- Life Exp:** Details expected life of the tree.
1 = 0 to 10 years life expectancy
2 = 10 to 25 years life expectancy
3 = 25 to 50 years life expectancy
4 = 50+ years life expectancy
- Amenity:** The amenity value of the tree. High, Average or Low
- Epicormic Shoots:** These are small branches which grow in clusters around the base or stem of the tree, usually the result of bad pruning or some other stress factor.
- Crown thin:** The removal of some of the density of a trees crown, usually 5% to 25%.
- Crown clean:** The removal of weak, crossing and dangerous branches from within the trees crown.
- Crown lift:** The removal of the lowest branches, usually to a given height.
- Deadwood:** The removal of all dead, dying and diseased branches from the tree.

4.

COLOUR CODED KEY



Trees whose retention is most desirable: High Category

1. Vigorous healthy trees, of good form, and in harmony with proposed space and structures.
2. Healthy young trees of good form, potentially in harmony with proposed development.
3. Tree for screening or softening the effect of existing structures in the near vicinity, or of particular visual importance to the locality.
4. Trees of particular historical, commemorative or other value, or good specimens of rare or unusual species.



Trees where retention is desirable: Moderate Category

1. Trees that might be included in the high category, but because of their numbers or slightly impaired condition, are downgraded in favour of the best individuals.
2. Immature trees, with potential to develop into the high category.



Trees, which could be retained: Low Category

1. Trees in adequate condition, or which can be retained with minimal tree surgery, but are not worthy for inclusion in the high or moderate categories.
2. Immature trees, or trees of no particular merit.



Trees for removal: Fell Category

1. Dead or structurally dangerous trees.
2. Trees with insecure roothold.
3. Trees with significant fungal decay at base or on main bole.
4. Trees with a cavity or cavities of significance to safety.
5. Trees that will become dangerous after removal of other trees for the reasons given in items 1 to 4.



Line of protective fencing around trees



Line of protective fencing (where minimum distance as been reduced by one third on one-side only to allow for access)

Tree No.	Species	Age	H'gt	Cr/Spr	DBH	Cond	Vigour	Form	Amenity	Life Exp.	Comments	Action
1849	Sycamore	M	17m	6m	0.4m	Poor	Low	Poor	Ave	1	Over lifted tree, showing signs of stress with dieback in crown.	Fell
1850	Horse Chestnut	M	17m	8m	0.6m	Fair	Ave	Fair	High	2	Large limbs removed in past. Reasonable specimen	Retain/ crown clean
1851	Sycamore	S/M	8m	5m	0.3m	Fair	Ave	Poor	Ave	3	Misshapen specimen due to shade.	Retain/ crown clean
1852	Horse Chestnut	S/M	9m	6m	0.3m	Poor	Ave	Poor	Ave	2	Large wound on main stem showing early signs of decay	Fell
1853	Elm	S/M	7m	5m	0.3m	Poor	Ave	Fair	Ave	1	Suppressed with dieback in crown. Typical signs of Dutch Elm disease.	Retain/monitor crown Clean
1854	Sycamore	M	18m	7m	0.5m	Fair	Ave	Poor	High	3	Reasonable specimen. Some minor wounds	Retain/ crown clean
1855	Elm	S/M	8m	4m	0.2m	Poor	Low	Poor	Ave	1	Dieback in crown, large wound on trunk where branch removed. Signs of Dutch Elm disease.	Fell
1856	Sycamore	M	16m	5m	0.3m	Fair	Ave	Fair	Ave	3	Tall drawn specimen Heavily crown lifted	Retain/ crown clean

Tree No.	Species	Age	H'gt	Cr/Spr	DBH	Cond	Vigour	Form	Amenity	Life Exp.	Comments	Action
1857	Sycamore	M	16m	6m	0.4m	Fair	Ave	Fair	Ave	3	Heavily lifted to clear telephone wire	Retain/ crown clean
1858	Sycamore	S/M	16m	6m	0.3m	Fair	Ave	Poor	Ave	2	One-sided crown Heavily lifted to clear telephone wire	Retain/ crown clean
1859	Lime	S/M	16m	6m	0.4m	Fair	Ave	Fair	Ave	3	Reasonable specimen growing well	Retain/ crown clean
1861	Sycamore	M	16m	6m	0.4m	Poor	Low	Poor	Ave	1	Tall drawn specimen Dieback in crown	Fell
1862	Sycamore	M	18m	7m	0.4m	Poor	Ave	Fair	Ave	1	Tall drawn specimen Cavities showing early signs of decay.	Retain/ crown clean
1863	Sycamore	M	18m	8m	0.5m	Fair	Ave	Fair	Ave	3	Heavily lifted. Slight lean on main stem.	Retain/ crown clean
1864	Sycamore	S/M	16m	5m	0.3m	Fair	Ave	Fair	Ave	3	Tall drawn specimen	Retain/ crown clean
1865	Beech	S/M	12m	6m	0.2m	Good	Ave	Fair	Ave	4	Reasonable specimen	Retain/ crown clean
1866	Elm	S/M	15m	5m	0.4m	Fair	Ave	Fair	Ave	2	Reasonable specimen	Retain/ crown clean

Tree No.	Species	Age	H'gt	Cr/Spr	DBH	Cond	Vigour	Form	Amenity	Life Exp.	Comments	Action
1867	Sycamore	M	18m	8m	0.7m	Fair	Ave	Fair	Ave	3	Heavily lifted. Large wound on trunk showing early signs of decay.	Retain/ crown clean
1868	Sycamore	M	18m	7m	0.7m	Fair	Ave	Fair	Ave	2	Heavily lifted. Minor wounds on trunk.	Retain/ crown clean

8.a

TREE REMOVAL AND SURGERY

Prior to the erection of the protective fencing any tree felling or pruning works should be carried out.

This will involve the removal of 4 trees.

All the remaining trees on site will be crown-cleaned to help promote health and vigour.

All works should be carried out to British Standard 3998:1989. by qualified arborists.

8.b

SITE INSPECTIONS

After the tree surgery works have been completed and the protective fencing erected, the developers Arboricultural Consultant will visit the site. This will be to ensure that all works are being carried out correctly. This would also be a good opportunity to invite the Local Authorities Tree Officer to carry out a site inspection. Any changes discussed at this time can then be implemented to the satisfaction of all parties.

During development the Arboricultural consultant should visit the site on a weekly basis to ensure that all works are being carried out in line with British Standard 5837:91, trees in relation to construction.

9.a

Protective fencing around trees

All the trees that are to be retained should be protected by stout fencing to avoid damage to their root systems by severance or asphyxiation. The fencing should run in a continuous line, which runs along the position of the working zone as depicted on the site plan. Such fencing should be erected before any materials or machinery are brought on site and before development commences. Once erected it should not be removed without prior consultation with a specialist in arboriculture.

The fencing should be at least 1.2m high and comprise of a vertical and horizontal framework of scaffolding, well braced to resist impacts. It should be strong and appropriate for the degree of construction activity taking place on site.

9.b

Additional precautions outside fenced areas

Once the area has been fenced off, any works on the remainder of the site can be carried out providing such works do not impinge on the protected areas.

To prevent injury to the trees, oil or cement should not be stacked or discharged within 10m of the bole. Materials generally should not be stacked or discharged within 5m of the bole.

Concrete mixing should not be carried out within 10m of the tree.

Fires should not be lit beneath or in close proximity to the trees canopy.

Trees to be conserved should not be used as anchorage for equipment used for removing stumps, roots or other trees, or any other purposes.

Care should be exercised when using cranes or similar equipment near the spread of the canopy of the tree.


Allowances should be made for the slope of ground so that damaging materials such as concrete washing; mortar or diesel oil cannot run towards the tree.

Trees to be felled that are adjacent to, or that lie within a continuous canopy of, trees to be retained should be removed with care. In some cases a tree may have to be removed in sections to avoid damage.

10. Precautions in Respect of Temporary Work

If temporary vehicle access is required through the protected area, a reinforced concrete slab should be laid over the existing soil surface, with appropriate protection along the road edge.

If it is essential for scaffolding to be erected within a protected area, fencing in accordance with 8.2.2 or 8.2.3. should be erected to provide just sufficient space for the scaffolding. The ground between this fencing and the building should be protected by boarding e.g. scaffold boards, as shown in figure 6. A single thickness of boarding laid on the soil surface will provide sufficient protection for pedestrian loads, but more substantial boarding sufficient to spread the load should be used for heavier traffic. The ground beneath the boarding should be left undisturbed and should be protected with a porous geotextile fabric. If necessary, sand should be laid on the fabric to level the ground. When required, the building scaffolding should be erected. The boarding should be left in place until the building works are finished.

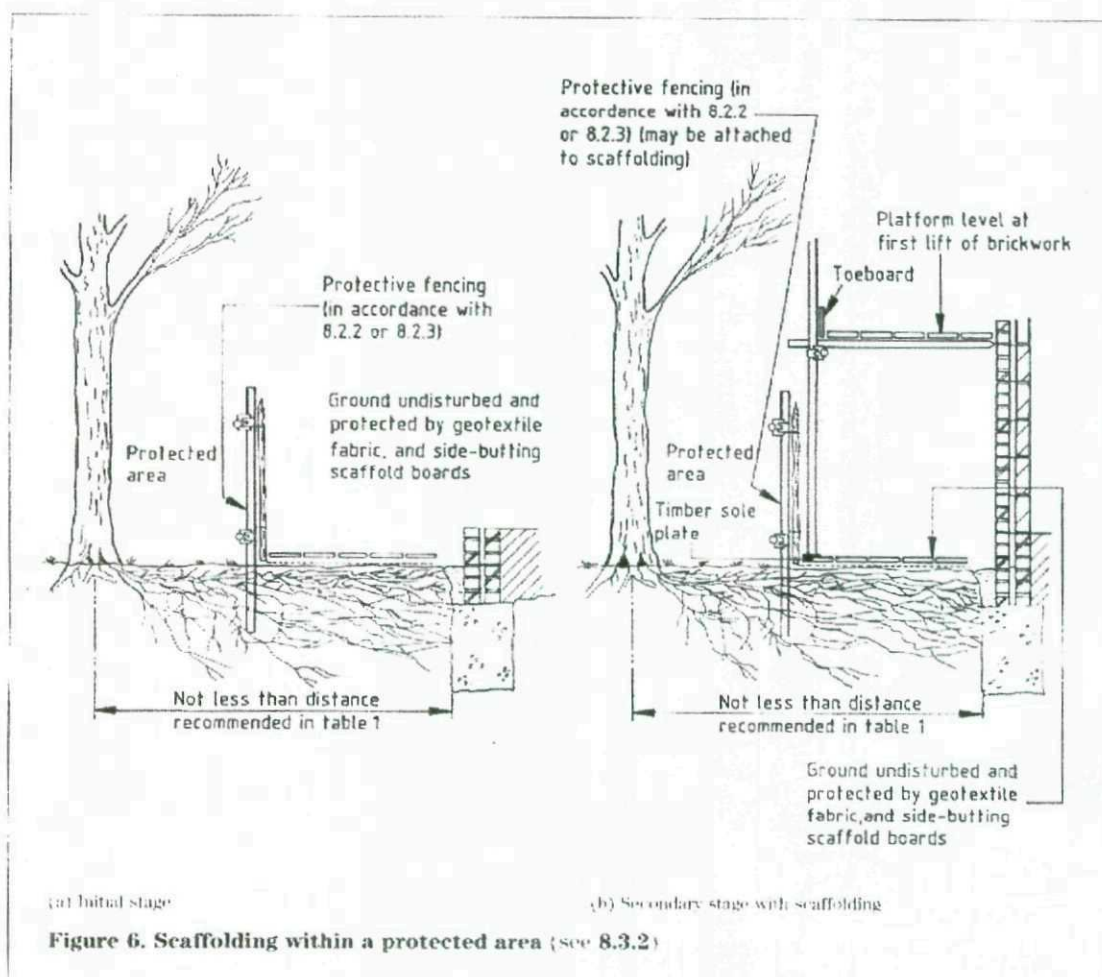

11.a **Trees root system**

Most trees have been growing undisturbed on a site for many years and will have developed an extensive root system. There is a balance between the trees crown (which demands water) and the roots (which supply it). Any change in the soil conditions will upset this balance. During construction machinery can squeeze the soil causing compaction, this reduces the amount of oxygen available to roots preventing them growing through the soil. Any material placed over the roots of a tree will reduce air movement into and out of the soil resulting in the reduction of oxygen to the roots. This results in progressive shoot and branch dieback until a new balance can be reached. However, if damage is severe and a new balanced cannot be reached the tree will ultimately die.

11.b **Prevention of damage to roots**

The majority of feeder roots occur in the uppermost 600mm of soil; changes in level should be minimised.

Kill ground vegetation using an appropriate herbicide such as glyphosate. Herbicide products containing sodium chlorate should not be used. All dead organic material should then be gathered up, this would prevent the build up of anaerobic conditions beneath the construction, which may otherwise occur if vegetation is allowed to decompose.

Construction should ideally be undertaken between May and October when the ground is driest and least prone to compaction.

All major protrusions such as tree or shrub stumps should be removed. Stumps should be ground out rather than excavated to minimise soil disturbance.

If excavation is so close to the tree that roots larger than 50 mm in diameter are encountered, extra care should be taken to avoid damage. Excavations should be undertaken by hand, avoiding damage to bark. The roots should then be surrounded with sharp sand before soil is replaced.

For roots to be retained undamaged no excavation, soil stripping or site grading should be carried out within the protected zone.

If it is necessary for a service trench to be taken closer to the tree than recommended, boring a hole for the service is acceptable. Provided the borehole is small root damage should be minimal. Boreholes should be kept as deep as possible. Alternatively a narrow trench can be excavated passing directly towards the tree along a radius no closer than 1 m from the trunk. Tunnel straight beneath the tree to a depth of no less than 750 mm. Provided the trench is kept as narrow as possible, root severance will be minimal.

12.a Services

The drainage and services will need to be placed in a trench that is set well outside the crown spread and rooting zone of the trees to be retained. Should it be necessary to dig within the protected area at any time, the developers arboricultural consultant should be present to ensure only hand digging is undertaken.

All services work on site will follow the National Joint Utilities Group's Guidelines for Planning, Installation and Maintenance of Utility services in Proximity to trees.

12.b No Dig Construction

Successful retention of trees even when adopting a no dig method, particularly within the protected zone, depends upon the condition of the trees, which should be assessed by a qualified arboriculturist, and on adherence to three simple rules.

- ❖ Roots must not be severed
- ❖ Soil must not be compacted
- ❖ Oxygen must be able to diffuse into the soil beneath the engineered surface

Damage to trees can only be avoided if the construction embraces the above principles and (within the protected zone) is no more than 4m wide.

Construction should incorporate two main components: a geogrid and an aggregate sub-base. Geogrid are high tensile strength synthetic grids designed to support roads on soft ground. When placed on the geogrid, appropriate granular sub-base material penetrates the mesh, but is unable to pass through it, forming positive interlock. This interlock between aggregate and geogrid provides a reinforced platform and efficient load spread into the underlying ground. A suitable geogrid/aggregate combination will prevent rutting of the ground beneath the construction.

Granular sub-base material Type 1. As specified by the Department of Transport (Department of Transport, 1991: clause 803) is the recommended aggregate. This has a relatively low fines content, which means that even when it is compacted it should be freely draining and will allow oxygen to diffuse into the soil.

For site-specific prescriptions and materials specifications advice may be sought from a qualified geotechnical or civil engineer.

Tensar SS30 Geogrid is manufactured by Netlon Ltd, New Wellington Street, Blackburn, BB2 4PJ.

13.

General Site Organisation

13.a

Working Area

The working area of the site will need to allow sufficient space to permit all the building operations to be carried out. This may include access for long or wide loads, or heavy materials; temporary site roads for these will not necessarily conform in size or position to the final road layout.

Adequate height clearance often poses problems, cranes, tipping lorries, piling rigs or other tall vehicles will all need adequate space for working.

Space will also be needed for storage of building materials, and for site cabins. It is essential that materials which are potentially toxic or damaging to trees not be stored in their vicinity. Nothing should be stored within the crown spread or rooting zone of the trees on site.

All deliveries to the site must be monitored, and their unloading supervised, to eliminate the risk of loads being placed outside the designated storage areas.

13.b

Phasing of Construction

Where possible the building of the units should be phased to keep the maximum working and storage areas available for as long as possible. Phasing of construction may help to reduce the amount of materials being stored on site at any one time.

In certain situations, where development is very close to the minimum protection zone, it may be necessary to dig and install the foundations from within the buildings footprint.

Alternatively the use of piling may be considered to reduce the amount of ground disturbance in these very sensitive areas.

14.a Removal of protective fencing

When construction works have been completed, and the site machinery has been removed the protective fencing can be taken down. This should be undertaken with care ensuring heavy machinery is not used.

When works have been completed it may be necessary to carry out de-compaction around some trees. This should be carried out with a manually operated machine to avoid further disturbance.

14.b Post construction remedial work to trees

Even though trees to be retained have been protected as recommended, direct damage can still occur. Alternatively it may not have been possible to detect the weakened condition of a tree prior to development and the change in the environment could cause indirect damage and accelerate decline of the tree.

The development of any site should not be considered complete until all the trees have been re-examined by a specialist with experience in the detection of early signs of declining tree health. Any remedial work necessary to ensure the health of the tree should be implemented before work is completed

At this late stage in the development, the safety of people and property in the vicinity of trees should be paramount when making decisions about retention and treatment of trees.

14.c Completion meeting

On completion of all the works, a site meeting should be arranged with the developer's Arboricultural Consultant and the Local Authority Tree Officer to discuss any further works that may be required.

15.

General Guidelines

- ❖ All work must be carried out to British Standard 3998 1989 by a competent Tree Surgeon with adequate Public Liability Insurance.
- ❖ This report has been prepared by Adrian Armitage and based on a visual inspection. It was submitted with good intent, drawing on 20 years experience. The consultant will not be responsible for events that happen after this time, which were not apparent at the time.
- ❖ Any defects seen by a contractor or the employer that were not apparent at the time should be brought to the consultants attention immediately.
- ❖ The consultant in respect of the trees can accept no liability unless the recommendations of this report are carried out under his supervision and within his time scale.
- ❖ Terms and conditions: payment is due within 28 days unless previously agreed.
- ❖ The client means the person or the company who gave instructions.
- ❖ Payment should be made to Armitage (UK) Ltd

We trust this information meets your requirements, but should you require any further assistance please do not hesitate to contact the undersigned.

Signed

A Armitage 14 September 2007
Adrian Armitage N.C. Hort.N.D.Ht/Arb
Arboricultural Consultant

4 Laithes Drive
Alverthorpe
Wakefield
WF2 9TE

Tel: 01924 386973
Fax: 01924 290125
Mobile: 07889 339252

