ELEVATION REFERENCE PLAN - NTS



PROPOSED EXTERNAL DOORS, WINDOWS, FRAMES, INFILL PANELS AND BARRIERS

1. The highlighted existing window units are to be removed and replaced with new external access doors, glazed side panels and rendered blockwork infill panels as illustrated.

2. Proposed door units are to be Kawneer 190 / 350 aluminium welded Manual Swing Door Sets with:
a. Overhead Concealed Closer
b. Anti finger trap stiles
c. Standard 'L' handles
d. Euro hook lock fitted with panic furniture internally and keyed externally
e. Powder coated white finish
f. Laminated and toughened glazing upper panels
g. GRP crinkle finish low level panels in green to match existing

3. Proposed door frames are to be Kawneer 451PT aluminium with:
a. Powder coated white finish


4. Proposed glazed upper and side panels are to be Kawneer 451PT Thermally Broken Aluminium Framing with:
a. Powder coated white finish
b. Laminated and toughened glazing upper panels
c. GRP crinkle finish low level panels in green to match existing
d. All glazing panels are to be fixed lights

5. Proposed blockwork infill panels are to be installed adjacent to Doors D017 and D018 to incorporate:
a. Cavity construction blockwork to both inner and outer leafs.
b. Plaster finish internally
c. Smooth render finish externally
d. Purple paint finish to render externally


6. Proposed door barriers:
a. 42mm diameter galvanised and powder coated (white) steel door barrier hoops to be installed adjacent to Doors D08, D011, D012, D015, D017, D018, D019 and D023

7. Proposed External Decorations
a. All existing CLASP concrete cladding panels and proposed render panels are to be prepared and decorated with Purple masonry paint


ELEVATION A - DOOR 008 - 1/20

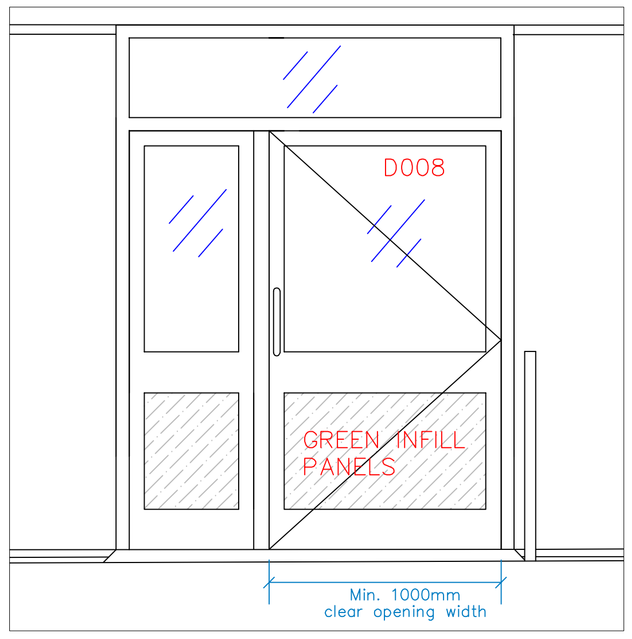

ELEVATION A - DOOR 015 - 1/20

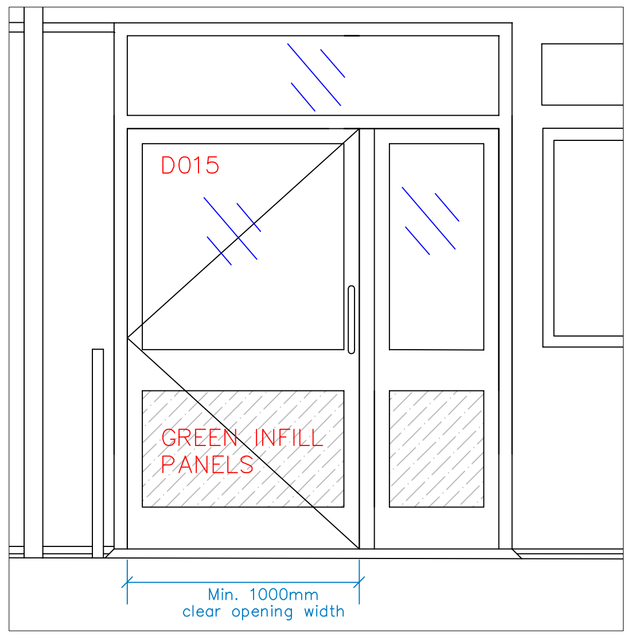


ELEVATION A - DOOR 017 - 1/20

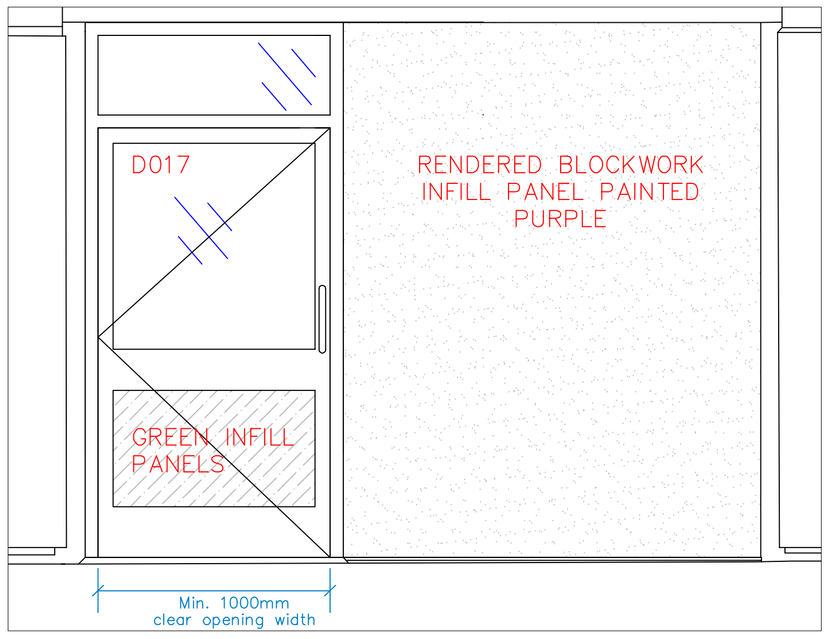


ELEVATION A - DOOR 023 - 1/20




ELEVATION B - DOOR 011 - 1/20

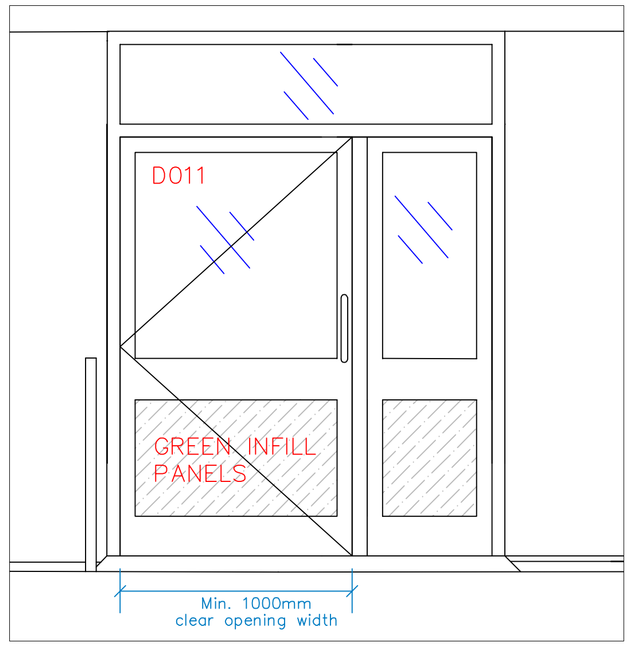


ELEVATION B - DOOR 012 - 1/20

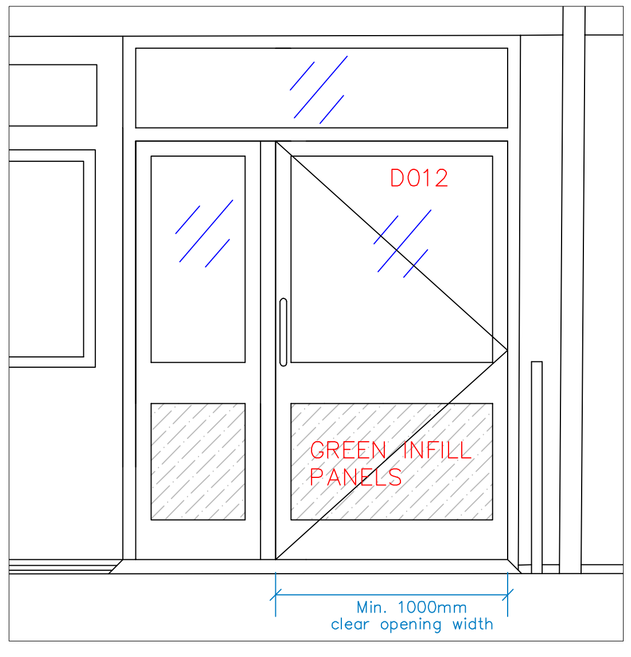

ELEVATION B - DOOR 018 - 1/20

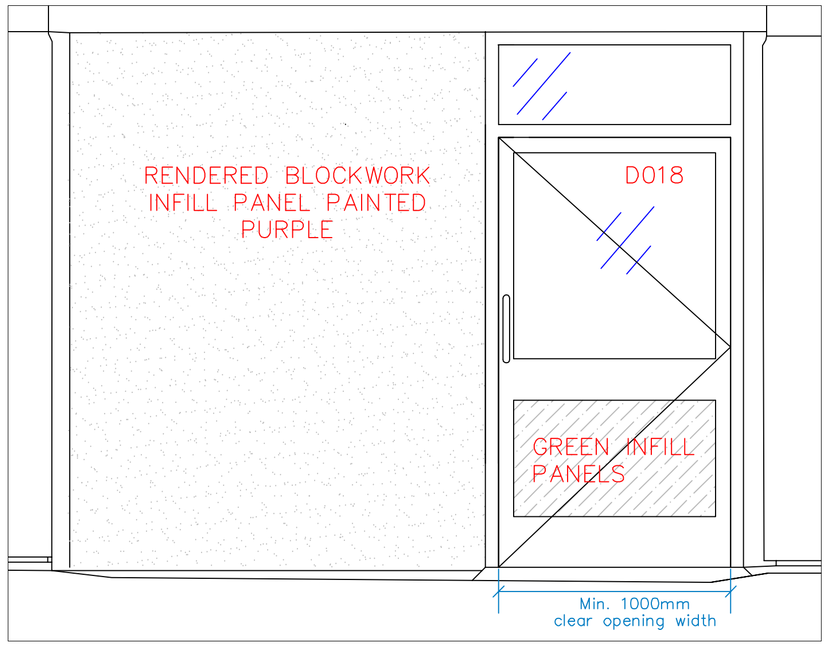

ELEVATION B - DOOR 019 - 1/20

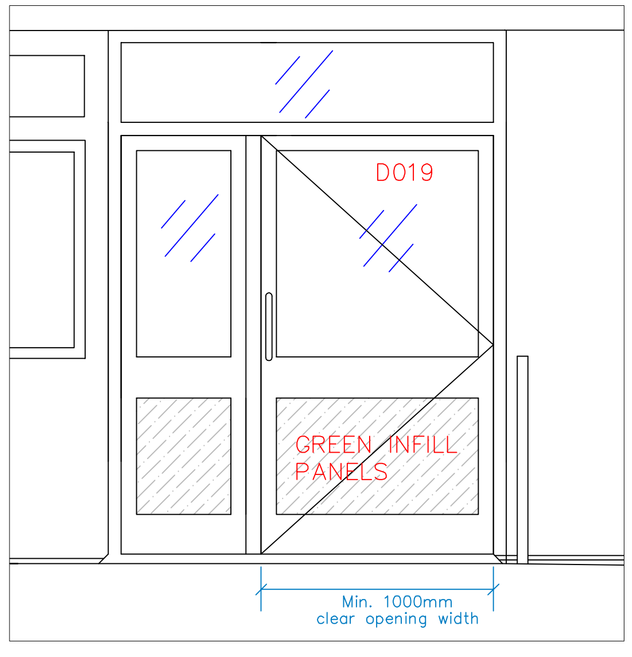

Do Not Scale

Use only written dimensions. All dimensions must be verified prior to the works being put into hand and any discrepancies reported to the originator.

Health And Safety Information

	Details	Initials	Date
Asbestos Survey			
Structural Check/Lifting & Handling			
Site Survey			
Access and Egress/Site Compund			
Hazards Identified			

Location Plan
N.T.S

General Notes

Rev.	Details of Revision	Date	Sign

Client:

Academies Enterprise Trust
To make our best better

FAITHFUL + GOULD
CONSTRUCTIVE EXPERTISE
3100 CENTURY WAY THORPE PARK LEEDS
Tel. +44(0)113 306 6600
Fax. +44(0)113 306 6601

Project:
AET
MEADSTEAD PRIMARY ACADEMY

Ref:
5159873

Drawing No:
5159873/T/015

Title:
PROPOSED EXTERNAL DOOR DETAILS

Scale:	Drawn:	Checked:	Co-ord chk:
1/20	PA	NB	
Original Size:	**Date:**	**Date:**	**Date:**
A1	01.02.2018	21.02.2018	

Status: TENDER

© FAITHFUL + GOULD COPYRIGHT: REPRODUCTION IN WHOLE OR PART BY ANY MEANS IS PROHIBITED WITHOUT THE PRIOR WRITTEN PERMISSION OF FAITHFUL + GOULD