




ELDON STREET
MIDLAND STREET
35
ELDON ST.
CINEMA
NORTH

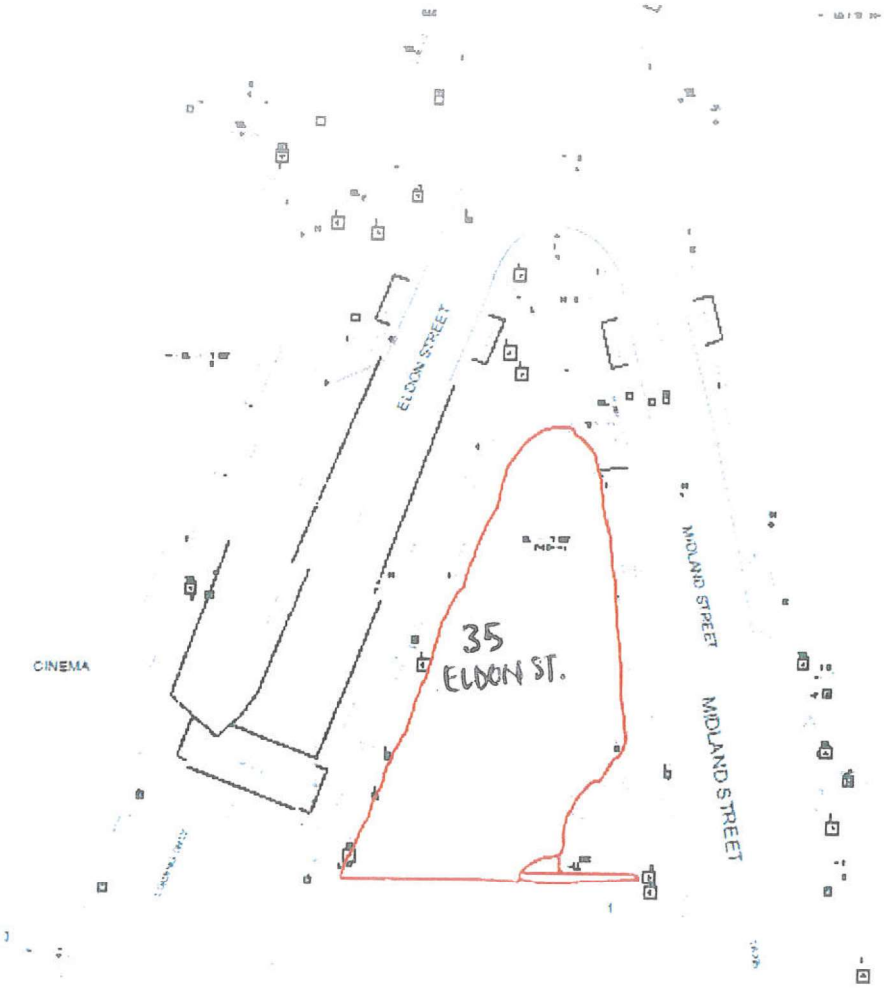


Licensed Family
Restaurant & Takeaway


01226 776820
5m
Eldon St

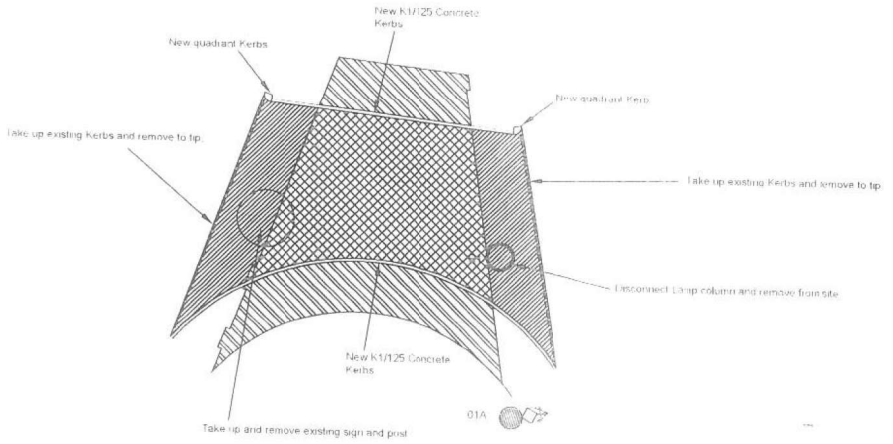

N

Temporary Carriageway construction
150mm Type 1 sub base
200mm AC 32 HDM Base 40/60
60mm AC 20 HDM Binder 40/60
40mm SMA Surface

Reduce footway levels by approx. 100mm
Concrete protect any exposed services and resurface with carriageway construction as above

New footway construction to tie in to existing.
100mm Type 1 sub base
40mm AC 20 Dense binder 100/50
20mm AC 6 Dense surface 100/15

R1 Remove existing column

'xx'A New column location on route of main
10m Galvanised steel column with Philips City Soul Gen2 20Klm Led lantern complete with electronic PEC

All material to comply fully with current BMBC Street lighting specification.

All lighting columns are to be provided with an inmetered single phase electrical supply via the REC cable network
It is expected that the contractor will coordinate with the REC regarding the installation of any cable ducts they may require.

This material is protected by copyright and must not be reproduced without the permission of the author. For unauthorised reproduction rights please contact the author. All rights reserved. Ordnance Survey data © Crown copyright and database rights 2020. Ordnance Survey 0100031673.

Rev.	By	Amendments	Date

BARNSLEY
Metropolitan Borough Council

Project
35 Eldon Street
Demolition

Drawing title
Temporary Highway works
Proposed Layout

Scale	Drawn	Checked	Date
1:500 @A1	NL		Jul 2020

Drawing No. BGW2_BMB_35ES_XX_PN_C_0100_0001 Rev

Paul Castle Service Director, Place Directorate
Environment & Transportation (Business Unit B)
P.O. Box 601, Westgate Plaza One, Westgate
Barnsley S70 9FA
Tel (01226) 770770 Fax (01226) 772220