

SCALE 1:20

ELEVATION AS EXISTING & AS PROPOSED

It is proposed to regularize the fencing arrangements forming the site boundaries by

1 Retaining the existing palisade square topped green coated steel fencing and gates on Carr Head Lane


2 Retaining the existing palisade square topped green coated steel fencing on the north and west boundaries

3 Retaining the existing palisade square topped green coated steel fencing at the pedestrian access at the north east corner adjacent to Thurnscoe Road


4 Between points A & B take down existing wire mesh type fencing and replace with palisade to match existing. At corner area take out seating and litter bin grub up paved area and restore to grass

5 Between points C & D provide and fix new palisade fencing to match existing. Retain undamaged existing wood fence to No. 9 Farcroft

6 Back edge of footpath kerbing and footpath to be retained undamaged and made good where necessary

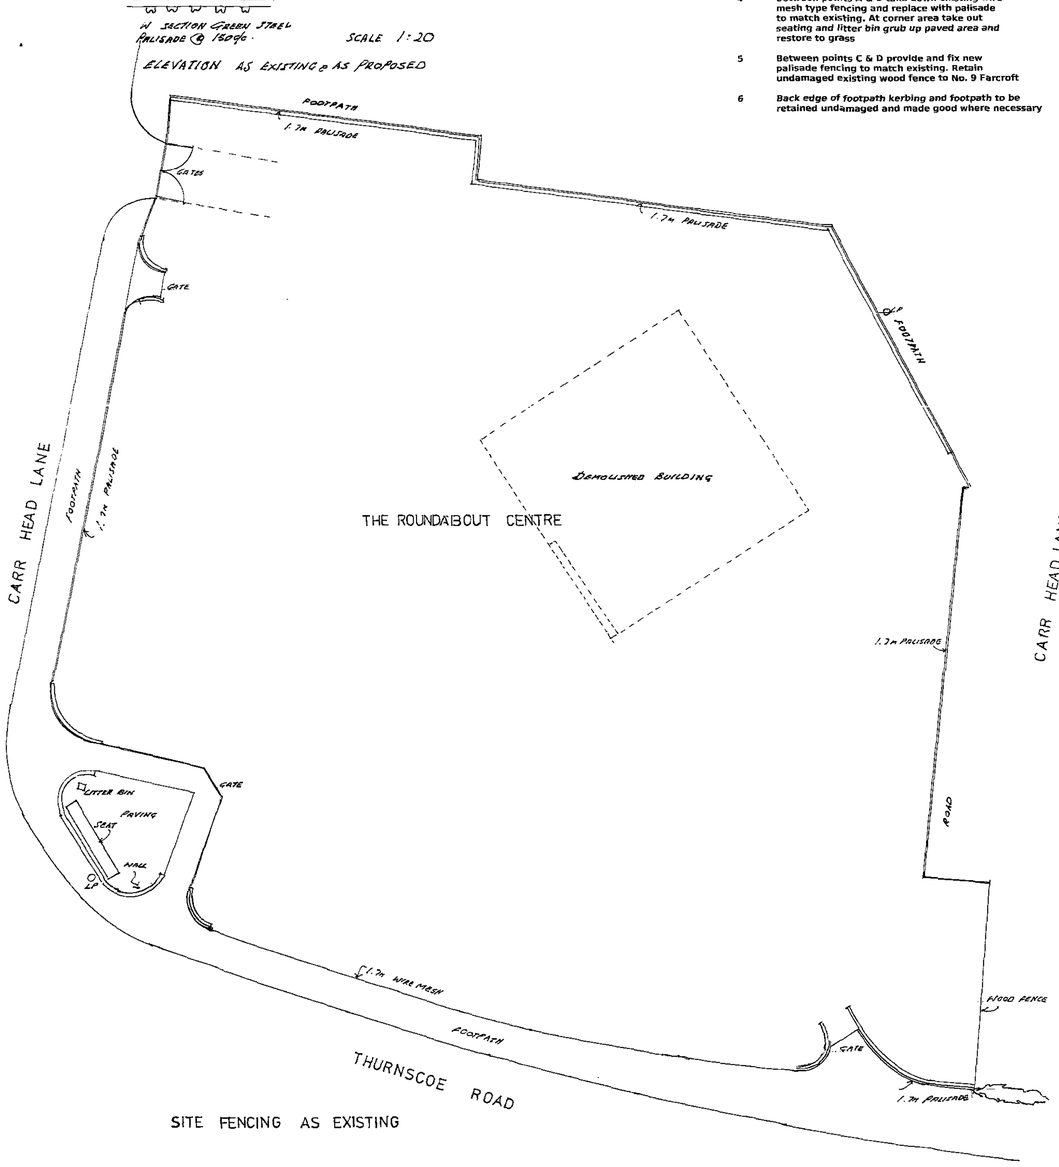

SITE FENCING AS EXISTING

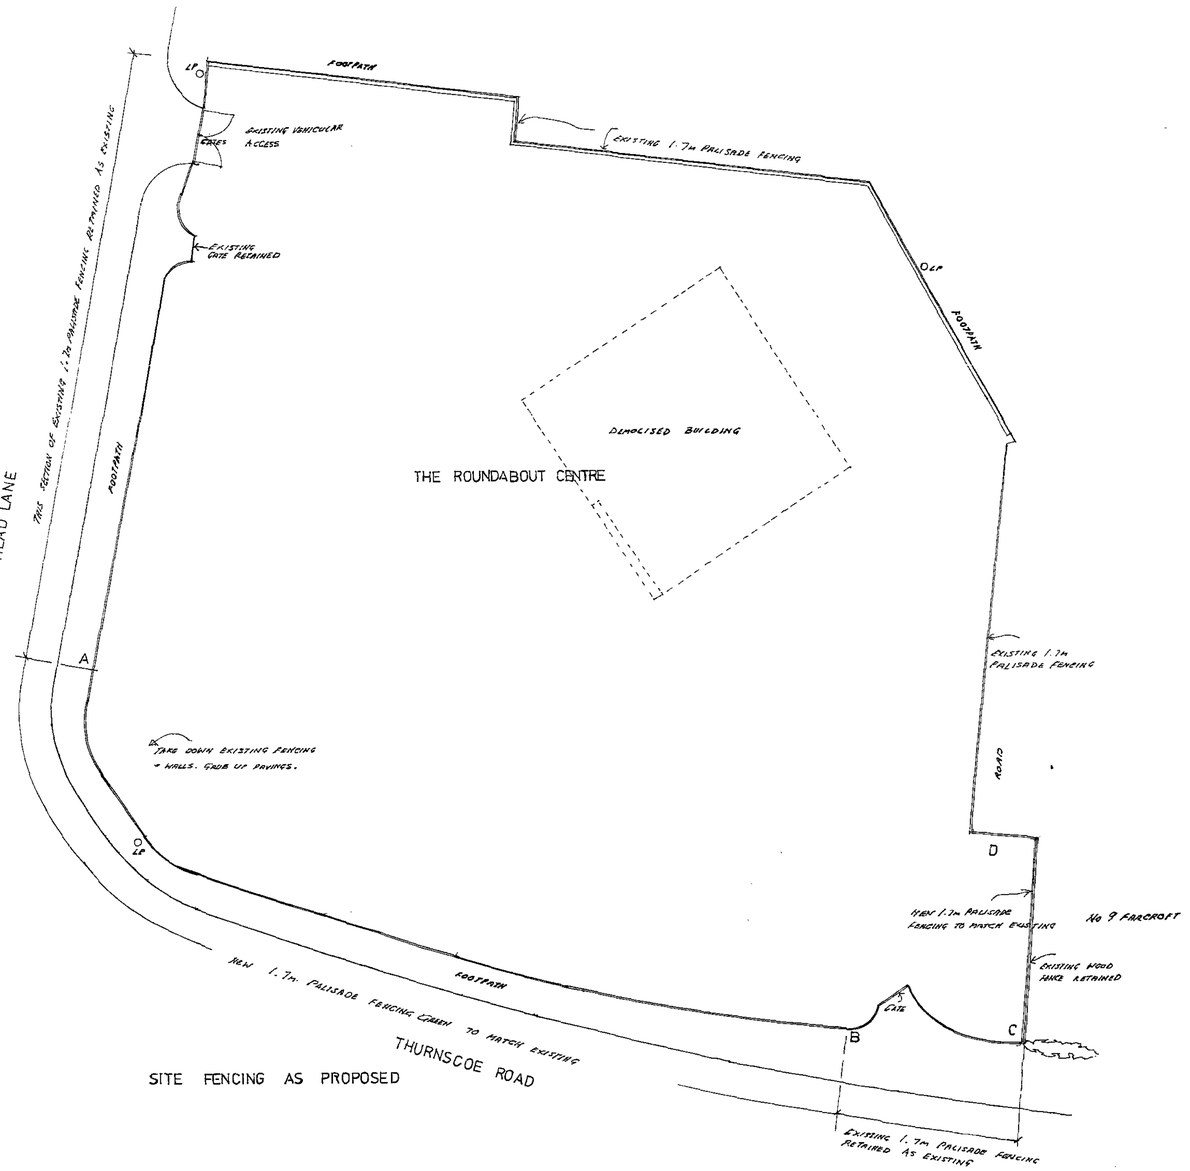

SITE FENCING AS PROPOSED

RECEIVED
17 AUG 2012
CORPORATE MAIL ROOM

PROPOSED FENCING at THE ROUNDABOUT CENTRE
Thurnscoe Road, Bolton on Dearne, Rotherham S63 8DB
For K Buck Building Contractor

DRWG. NO. 740/1 **SITE FENCING** **Scale !: 200**

Gordon Stephenson, Chartered Architect, R.I.B.A.
10 Parkwood Rise, Barnby Dun, Doncaster DN3 1LY

email stevenson_g3@sky.com **Tel 01302 891411**