


Tree Constraints Plan (Existing Layout)

Areas Shaded Orange:
Building in these areas has low arboricultural impact
and only requires the removal of very low quality trees.
However, these trees are protected by the TPO.

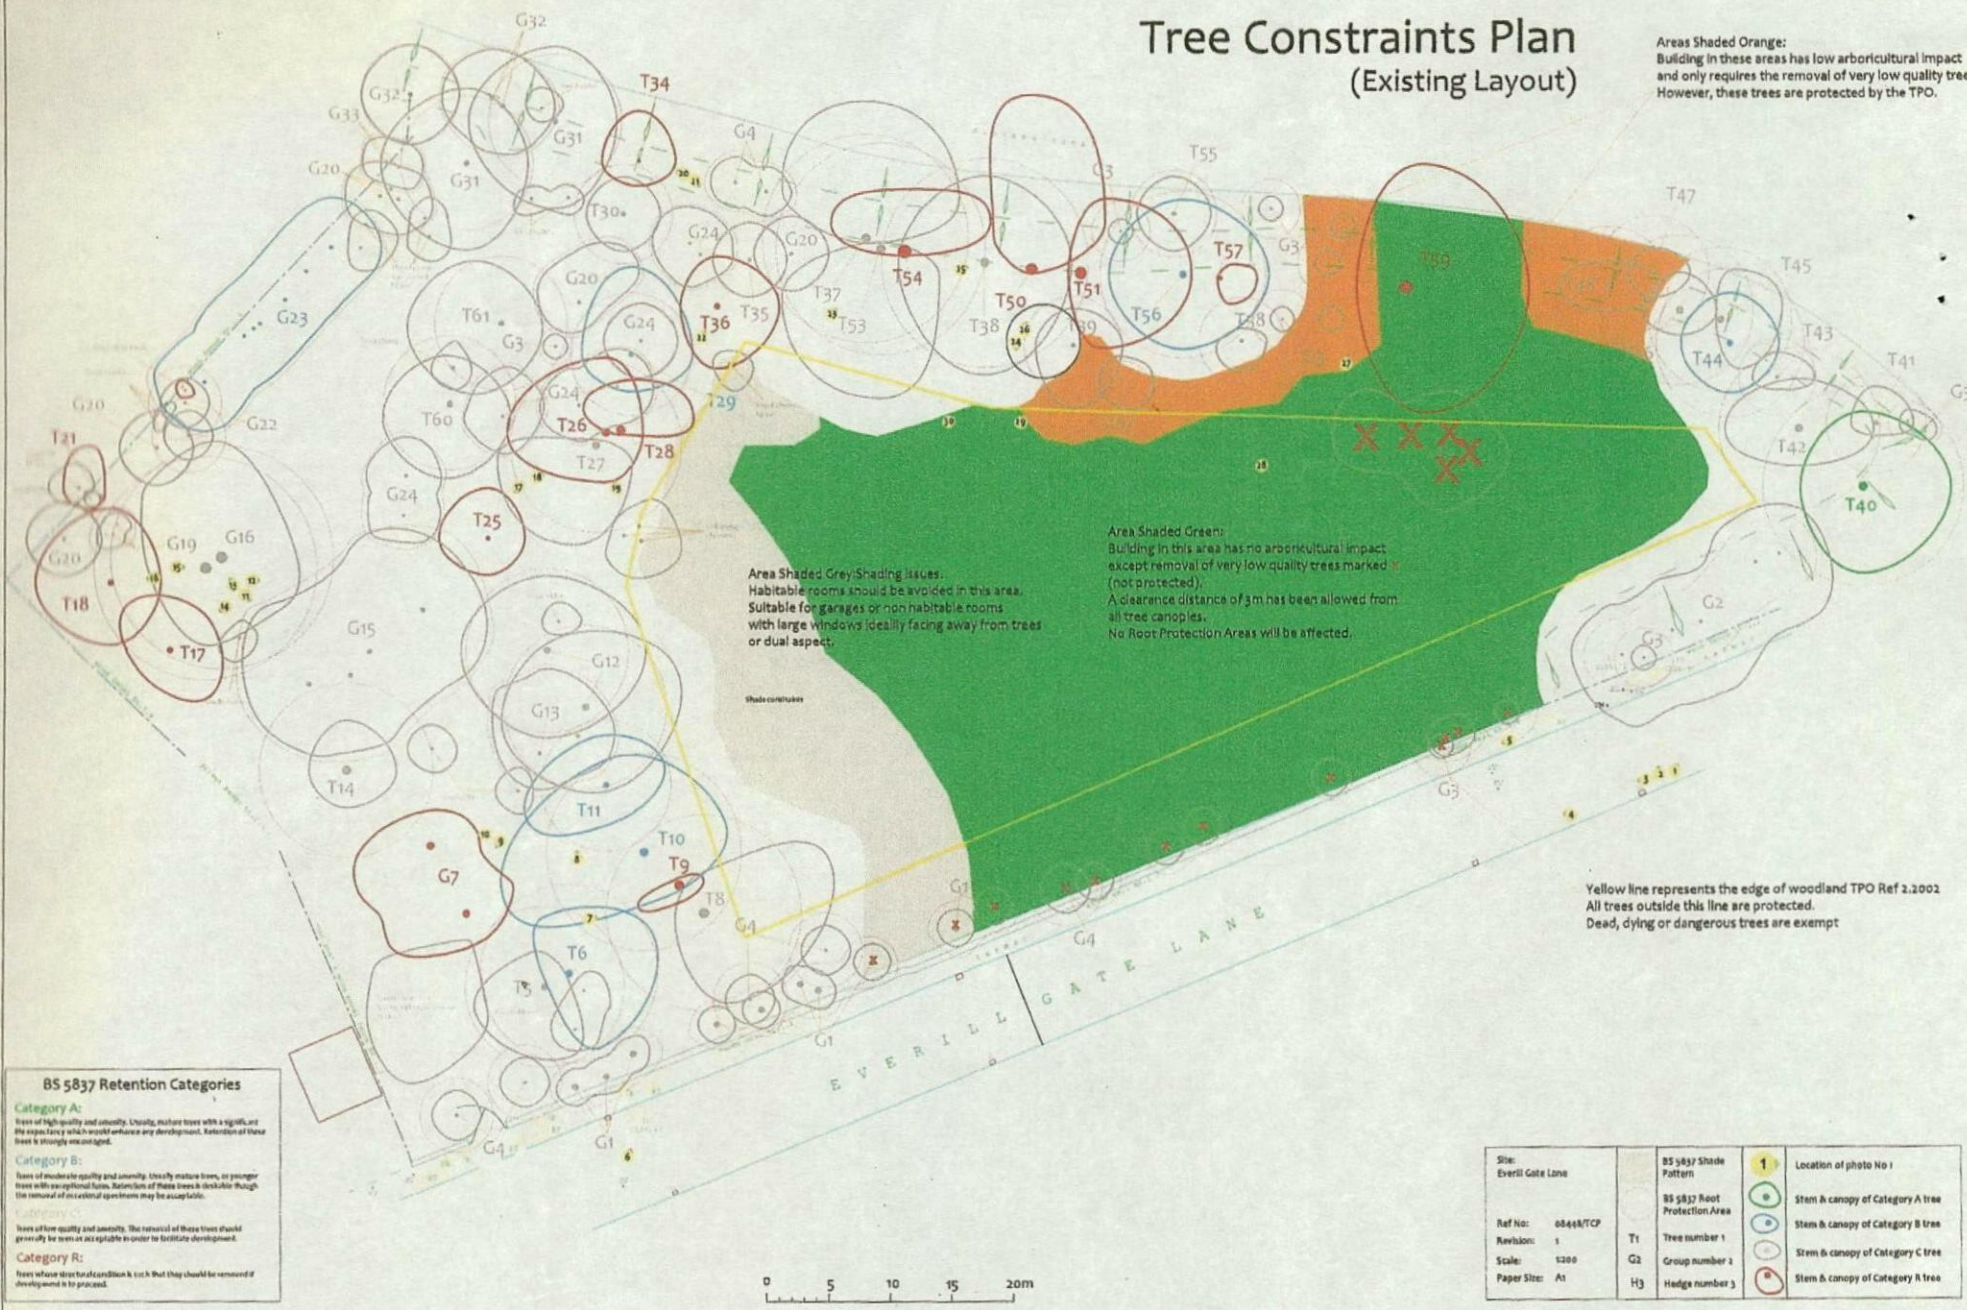

	Age & Species	H	C	D	Spread (m)		Diagram (m)	Notes	Recommendations		Vigour	Anomaly Value	Life Expectancy (yrs)	Retention Category	
					W	N			Priority	Inspect Freq (yrs)					
					S	E			Physiological Condition	Structural Condition					
G1	Mature Poplar	av	av	av	av	1.5	25	Form: Heavily topped stumps with epicormic growth only. Defects: Branch stubs, cavities and bark wounds throughout. Other: Fungal growth on several specimens.	Monitor.		Low		Moderate		
	Populus sp.	5	3	50	1.5	1.5	0		Low	1		Poor	<10	C -	
G2	Semi-Mature Ash	av	av	av	av	4	25	Position: Crown overhangs the footpath. Form: Single and multiple stemmed with slight leans and balanced crowns. History: Occasional pruning wounds due to crown lifting (healing well). Defects: Minor deadwood and broken branches to lower crown. Other: Occasional bark wounds.	No action required.		Moderate		High		
	Fraxinus excelsior.	12	3	25	4	4	0		n/a	3		Fair	40+	C +	
G3	Semi-Mature Hawthorn	av	av	av	av	1	25	Form: Single and multiple stemmed, vertical with typically shrubby canopies. History: No evidence of significant pruning. Defects: No defects observed. Other: Predominantly poor specimens.	No action required.		Moderate		Low		
	Crataegus monogyna.	3	2	20	1	1	0		n/a	3		Fair	10-20	C -	
G4	Semi-Mature Sycamore	av	av	av	av	2	25	Form: Single and multiple stemmed group. History: No evidence of significant pruning. Defects: No defects observed. Other: Insignificant specimens.	No action required.		Moderate		Low		
	Acer pseudoplatanus.	5	2	25	2	2	0		n/a	3		Fair	20-40	C	
T5	Mature Sycamore	19	4	54	6	3	25	Form: Single stemmed and vertical with an unbalanced crown. History: Occasional pruning wounds (healing slowly). Defects: Significant bark wounds to lower stem.	Monitor.		Low		Moderate		
	Acer pseudoplatanus.				6	6	0		Moderate	1		Poor	10-20	C	
T6	Mature Sycamore	19	4.5	60	2	5	25	Form: Twin-stemmed at 2m with an unbalanced crown. History: No evidence of significant pruning. Defects: Included bark at stem junction, minor bark wounds to lower stem.	No action required.		High		Moderate		
	Acer pseudoplatanus.				6.5	7.5	0		n/a	3		Good	20-40	B	
G7	Over-Mature Poplar	av	av	60	av	3	25	Form: Multi-stemmed at 1m with poorly formed crowns. History: No evidence of significant pruning observed. Defects: Major cavities to lower stem, major broken limbs. Other: Potential hazard.	Remove.		Low		Low		
	Populus sp.	14	4	@ Base	7	4	0		High	N/A		Poor	<10	R	