


GROUND FLOOR PLAN
GENERAL ARRANGEMENT

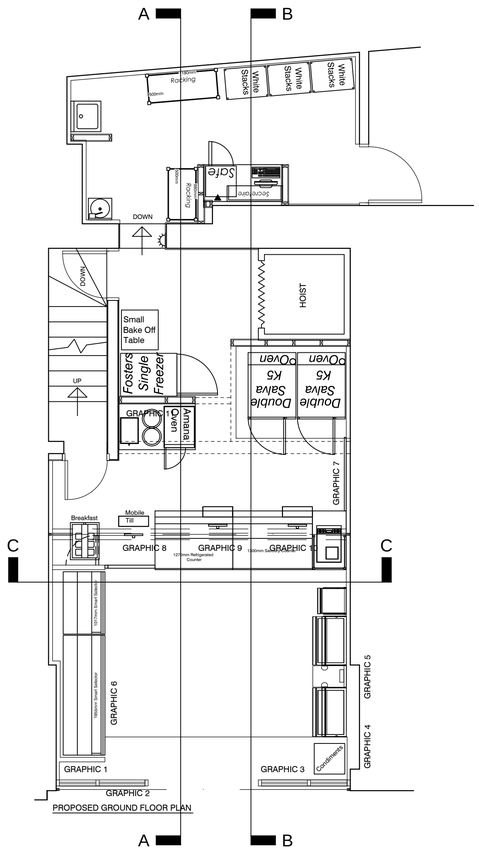


GRAPHIC NUMBER	GRAPHIC DISCRETION	WIDTH MM	HEIGHT MM	ORDERED BY
GRAPHIC 1	PET G GRAPHIC	600	1200	GREGGS
GRAPHIC 3	PETG WINDOW GRAPHIC	600	1200	GREGGS
GRAPHIC 2	DDA SIGNAGE STATUTORY SIGN	STANDARD	STANDARD	GREGGS
GRAPHIC 4	DDA COMPLIANT STATUTORY PANEL, ALL IN ONE CUSTOMER CARE INFO BOARD	560	460	GREGGS
GRAPHIC 7	FIXED TO NOVOGRAF FERROGRAF FRAME POS GRAPHIC (LANDSCAPE)	1200	800	GREGGS
GRAPHIC 9	COFFEE MENU GRAPHIC	900	600	GREGGS
GRAPHIC 10	FRESHLY BAKED SAVOURIES	1300	500	GREGGS
GRAPHIC 8	FRESHLY GROUND COFFEE	1300	500	GREGGS
NOVOGRAPH GRAPHICS				
GRAPHIC 6	'FRESH SANDWICHES MADE HERE TODAY' GRAPHIC	TBC ON SITE	TBC ON SITE	SHOPFITTER
GRAPHIC 5	FEATURE BREAD GRAPHIC	2000 TBC ON SITE	2650 TBC ON SITE	SHOPFITTER
GRAPHIC 11	FEATURE COFFEE GRAPHIC	1250 TBC ON SITE	1500 TBC ON SITE	SHOPFITTER
N.B. ALL NOVOGRAF GRAPHICS TO BE OVERSIZED BY 100MM TO ALLOW FOR SITE TRIMMING				

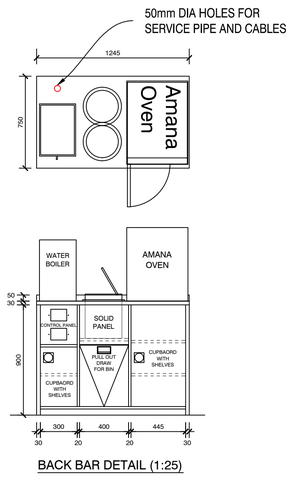


BACK BAR DETAIL (1:25)

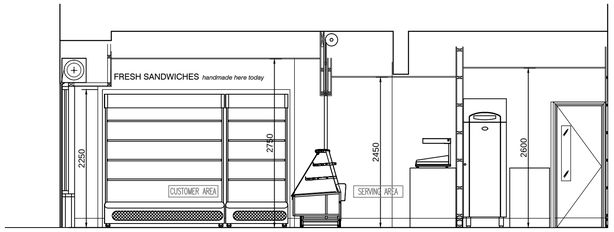


ELEVATION ON WALL A - A

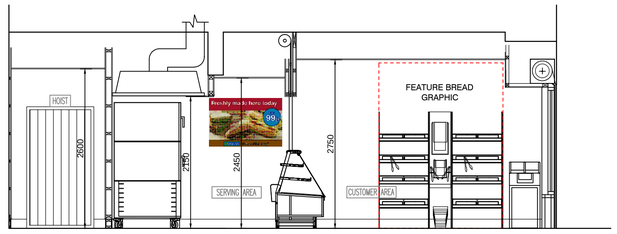


ELEVATION ON WALL B - B

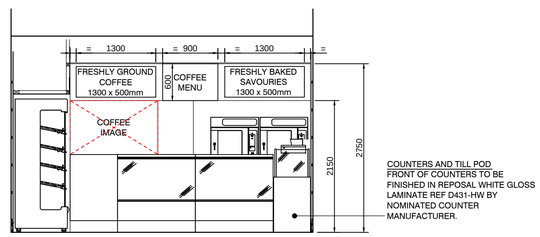

ELEVATION ON WALL C - C

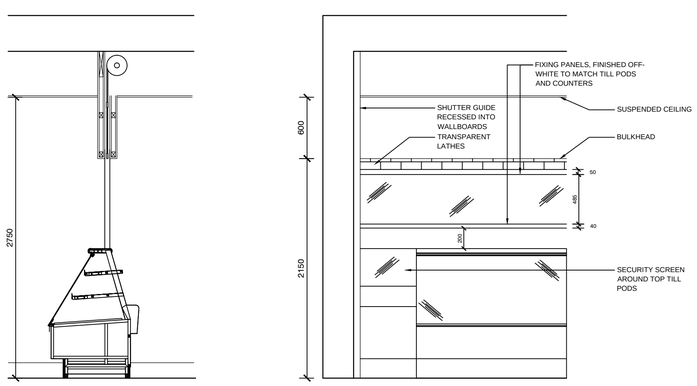

TYPICAL NIGHT SHUTTER DETAIL:
CENTRAL SHUTTERS
(CONTACT CLIVE: 07970943319)

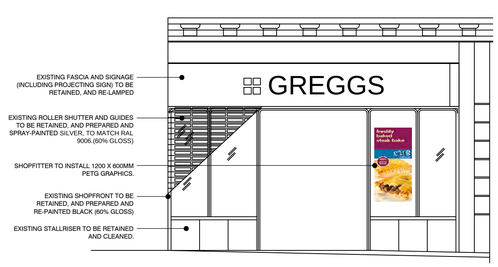

PROPOSED FRONT ELEVATION

SURVEY INFORMATION.
The reader of this drawing is advised that it provides basic information relating to the general size and arrangement of the existing facility.
The existing layout does not provide in-depth details of services, equipment, and/or structure.
Those undertaking works on behalf of Greggs Plc shall in the first instance, inspect the areas of works prior to commencement and prepare any necessary survey information and make safe prior to works commencing.
Pipe/Cable detectors should be used to establish existing services which may be concealed from view.
Contractor to consult with local Gas, Electricity, Water, Drainage and Telephone authorities as necessary.

DESIGN INFORMATION.
This drawing shows the design requirements in principle for the refurbished premises, and is supported by Greggs / Bakers Oven Contractors Guide.
If in any doubt you must contact the relevant Shopfitting Manager.
Where the nature of the works requires detailed design the Contractor will provide all such information necessary for the works to be carried out in a safe and workmanlike manner.
All information established during detailed design, including risk assessments, method statements etc. shall be provided to the Principal Contractor for inclusion in the Construction Phase Health & Safety Plan, which must be altered accordingly.

HEALTH & SAFETY NOTES.
These notes are to read in accordance with the Pre-tender Health & Safety Plan.
Contractor to inspect Asbestos register for the property prior to commencing works and satisfy themselves as to the extent of any hazardous materials.
The works involve various hazardous activities which could cause injury to those undertaking the works, Greggs plc staff and the general public.
Typical risks are listed in the pre-tender plan, however the Contractor must highlight any additional risks which he feels have not been identified.
Risk Assessments and/or Method Statements must be provided for each of these tasks prior to works commencing.
Works should not be undertaken if this information is unavailable and/or works should be delayed if circumstances on site require the risk assessment/ method statement to be modified.
All works must comply with current legislation, Health & Safety at Work Acts and guidelines, CDM Regulations and Management of Health & Safety at Work Act.
All supplies/services/equipment/components shall be tested and commissioned before Handover and left in perfect working order.

WORKMANSHIP.
The site is to be kept clean and free from all waste, debris, rubbish and obstructions at all times and it should be removed from site at regular intervals. All waste to be disposed of at authorised sites. Contractor to allow for all fees and costs incurred, and documentation of correct disposal should be made available to Greggs if requested.
Contractor to take all due care and attention when undertaking demolition, removal or stripping out. If suspect materials are encountered the works in the area to be stopped immediately, sealed off and immediately reported.
The Contractor is to ensure that all works and workmanship complied with the relevant code of practice within BS 8000, including all amendments.

ATTENDANCES.
Contractor to allow for attendance's on any nominated sub contractors and include these costs in the tender price.
Nominated Subcontractors are to be allowed full use of site facilities and services.
Contractor to allow for attendance on nominated suppliers of equipment and to administer their safe unloading, storage and positioning.

REV	DESCRIPTION	DATE	NAME

GREGGS

GREGGS Plc (CENTRAL)
MAINSTREAM WAY
SALTLEY
BIRMINGHAM
B7 4SN
tel.: (0121) 605 1122

Project Title
PEEL SQ, RE-FIT

Drawing Title
EXTERNAL AND INTERNAL ELEVATIONS

Site Address
3 PEEL SQUARE BARNSLEY S70 2QT

Gross Building Area	Gross Customer Area
1,875 Sq Ft	180 Sq Ft

Drawing No.	Rev.
RCEN-S0620-06	

Date	Scale	
14.11.11	1:50	@ A1

Issued	Drawn by
21-Nov-11	