



DWBC
CORPORATE MAIL ROOM
29 MAY 2015
Received by:
ORIGINAL COPY

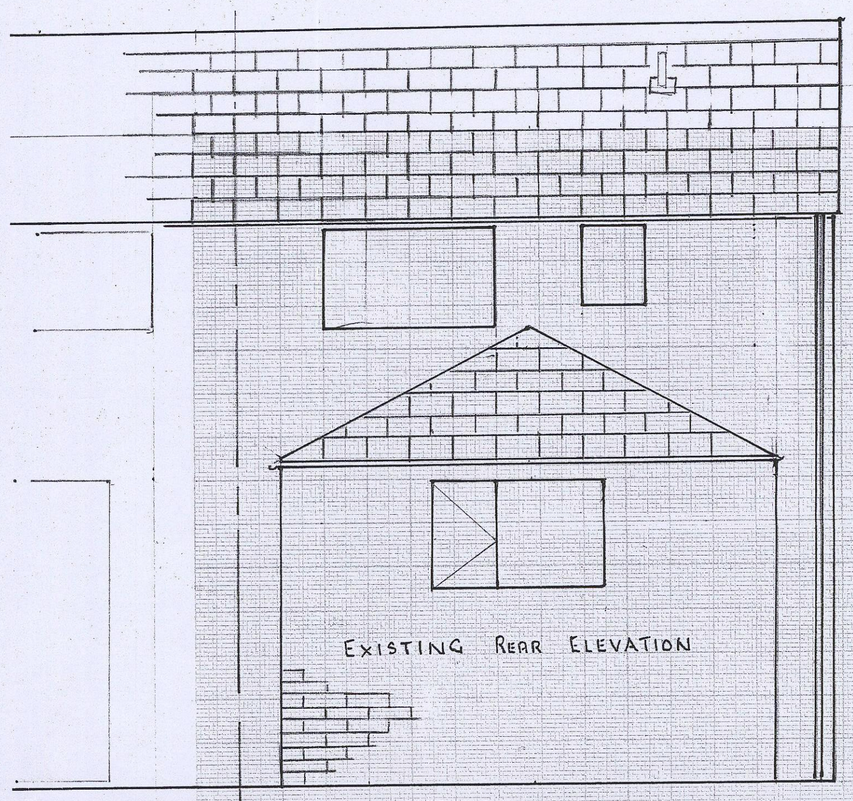


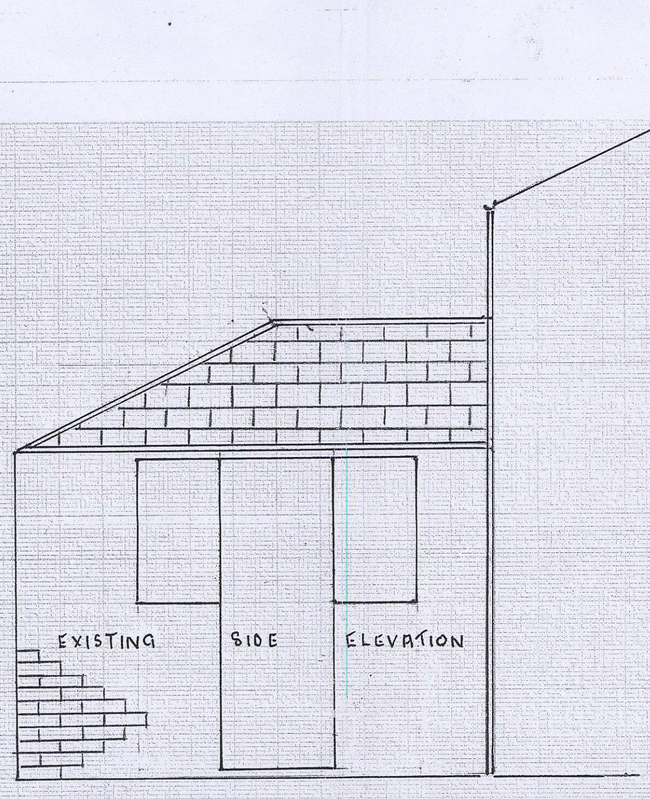


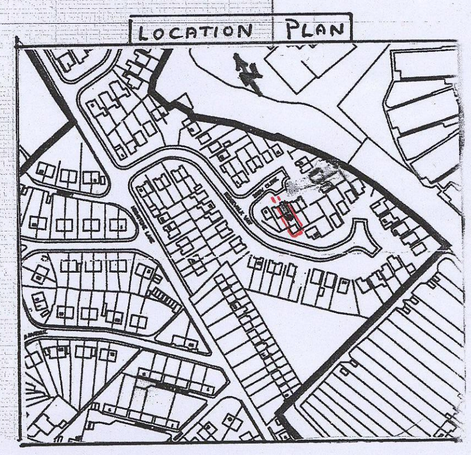



SITE PLAN

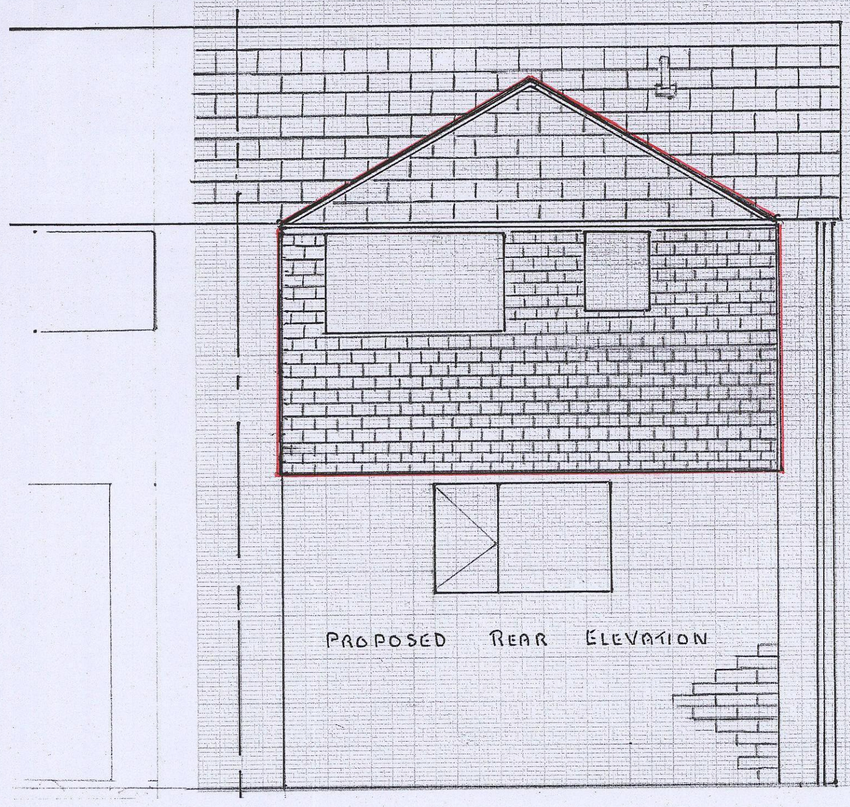


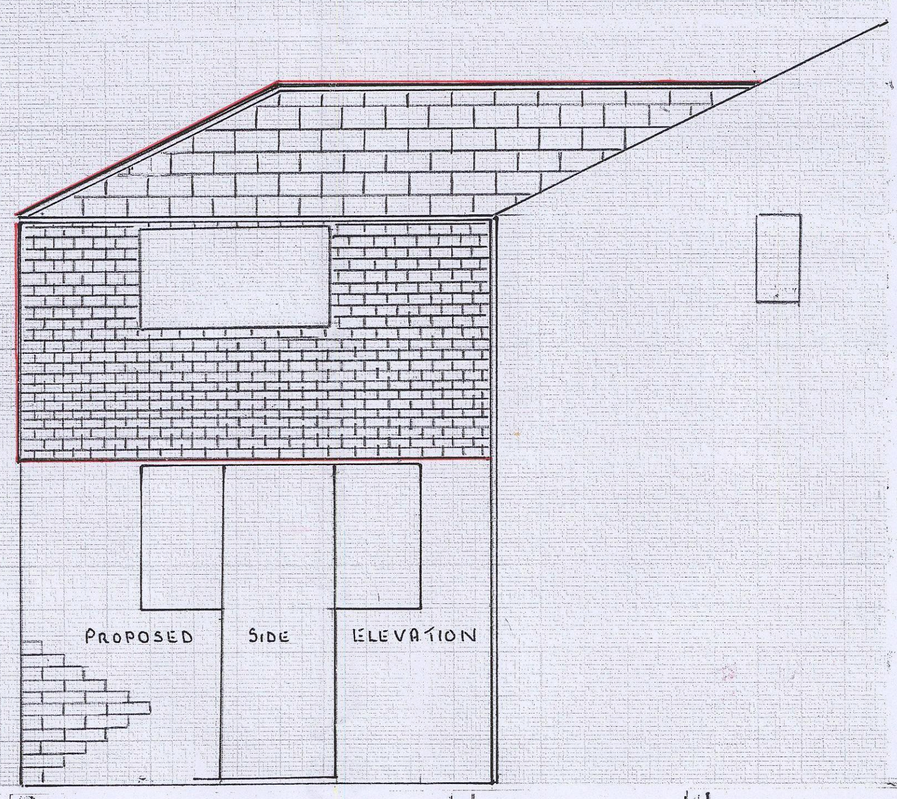

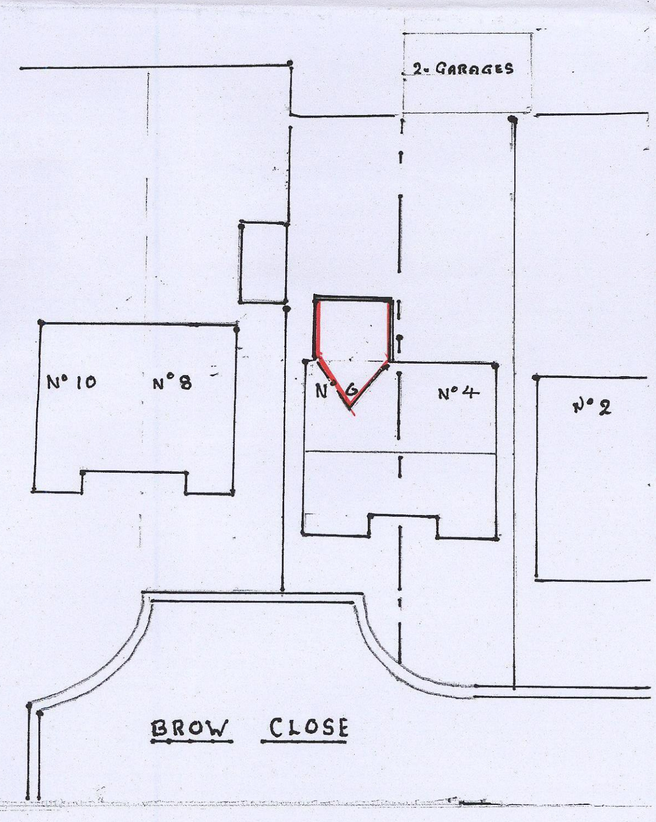

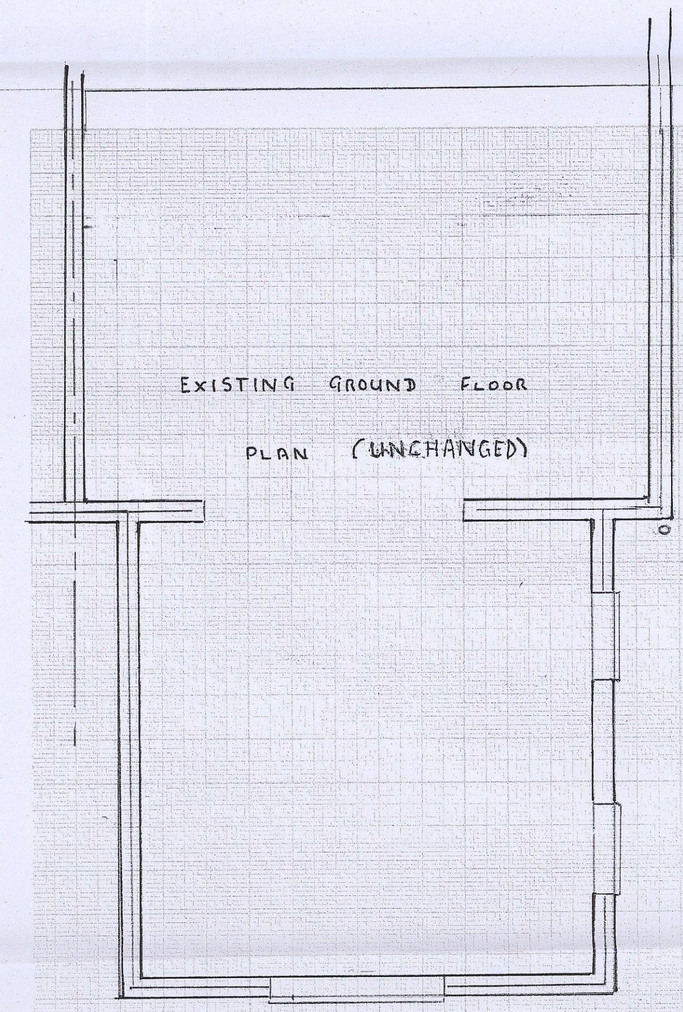

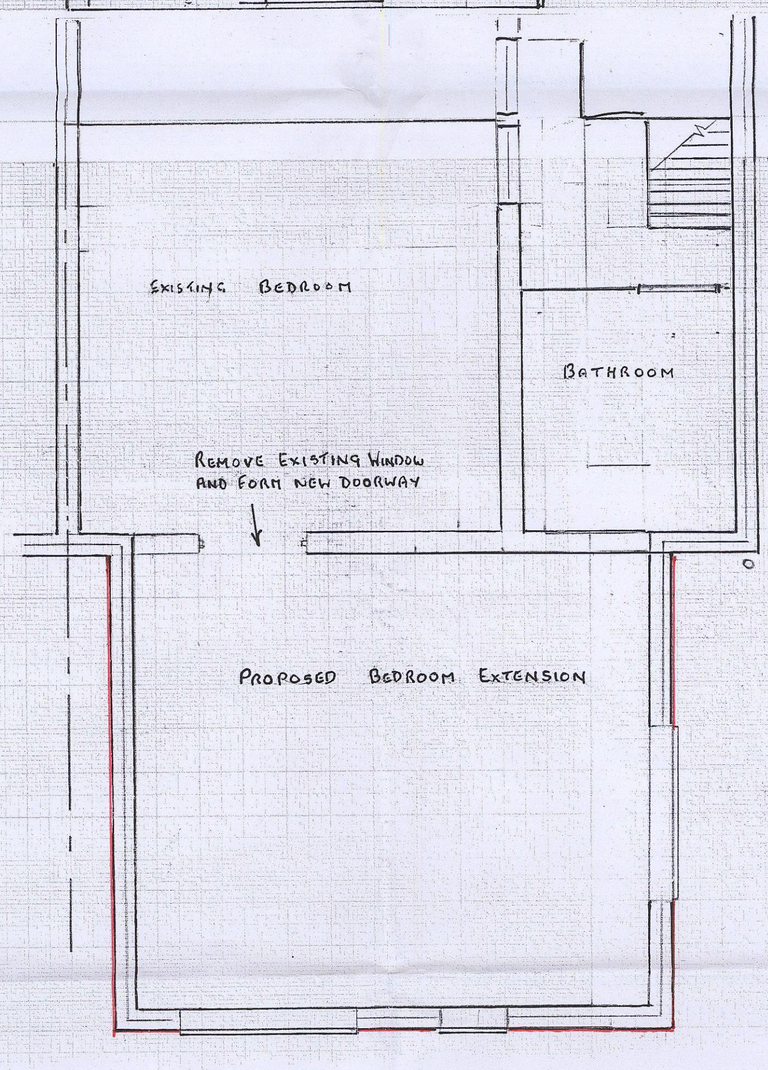

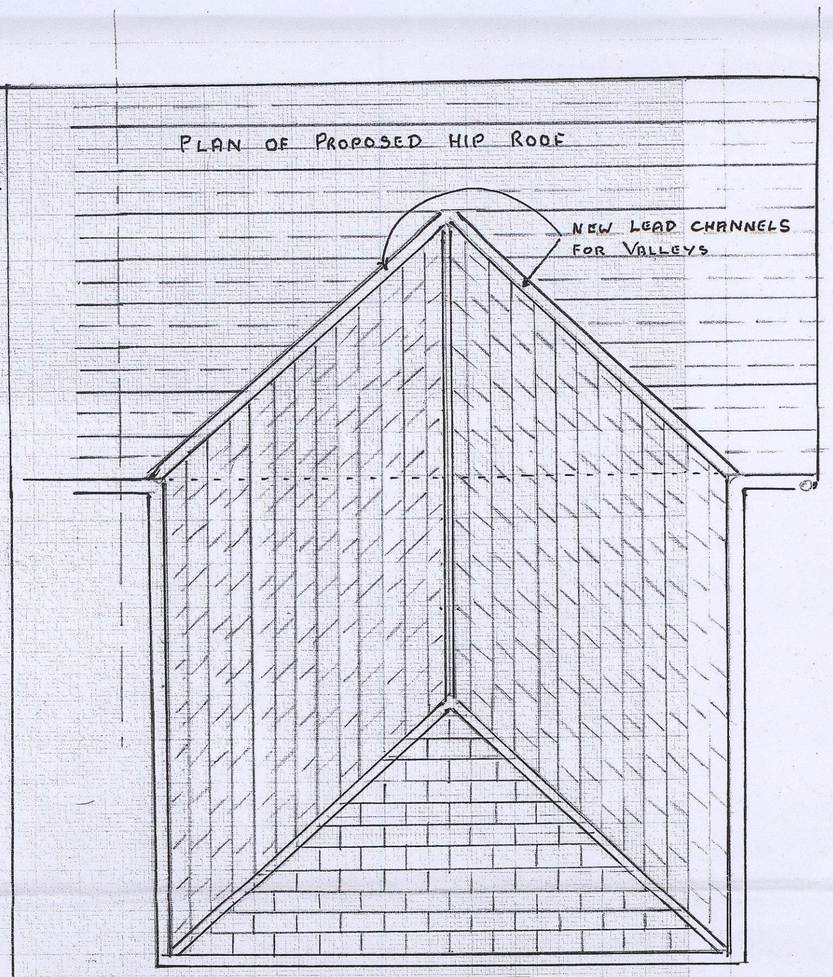

PROPOSED BEDROOM EXTENSION
FOR MR & MRS. LITHERLAND
6 BROW CLOSE
WORSBROUGH
S70 6TJ


SCHEDULE OF WORKS for new bedroom extension.

Remove existing roof from ground floor kitchen extension
Build up external brickwork and blockwork on top of existing tying
Into existing leaves every forth course of bricks horizontally and vertically.
When up to existing roof pan, re-place roof taken from ground floor and extend where necessary into existing roof (as per drawing)
All dimensions on extension are exactly the same as ground floor and no extra work for drainage is needed.
NB
All works subject to the approval of planning and building regulations
All stages of work to be approved by the building inspector and any and
All remarks made by him must be adhered to.
Materials used must be the same as existing that includes doors and windows

These plans have been shown to immediate neighbours and no objections were Forthcoming.

The extension is at number 6 Brow Close, Worsbrough, S70 6TJ
For Mr and Mrs Litherland
Plans drawn by Mr Alan Oxley (Builder)

P.S. EXISTING FOUNDATIONS HAVE BEEN CHECKED AND FOUND TO BE ADEQUATE ENOUGH TO ACCEPT PROPOSED EXTENSION.

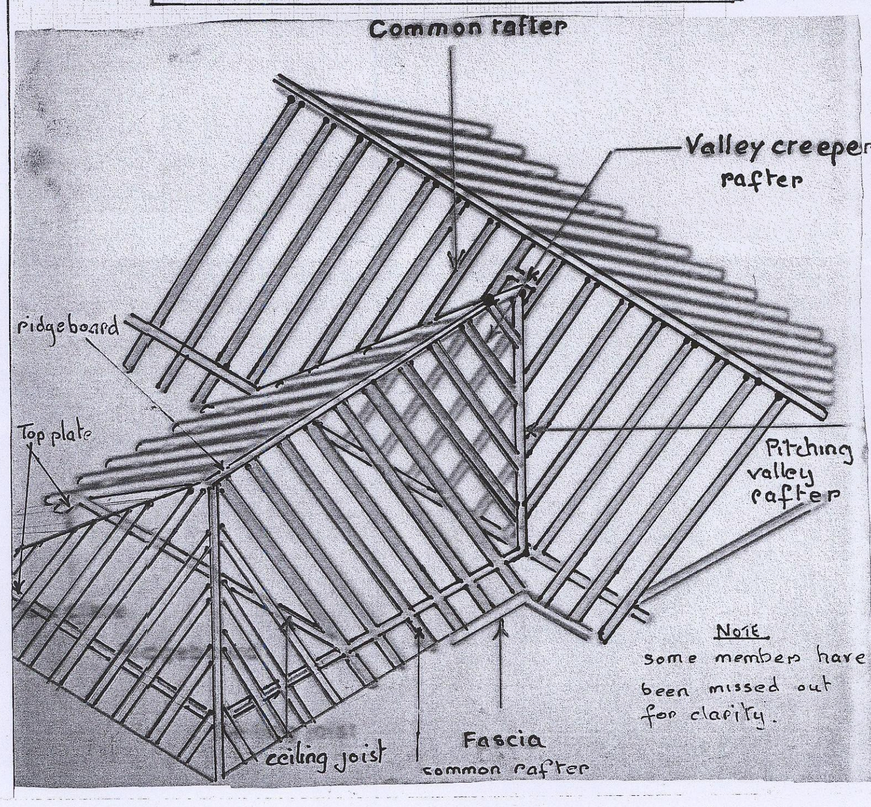

Chartwell