PROPOSED MATERIALS


Rear Extension
External walls - Cavity masonry construction with facing brick to match existing
Windows & doors - Double glazed uPVC windows to match existing
Roof - Pitched slate covered roof to match existing.

Patio,
Stained natural timber construction


Carport
External walls - Masonry construction with facing brick to match existing, rear wall to be retained if sound or reconstructed in brick work to match
Door - Powder coated roller shutter
Roof - Pitched slate covered roof to match existing.on exposed timber frame structure




PROPOSED SE SIDE ELEVATION

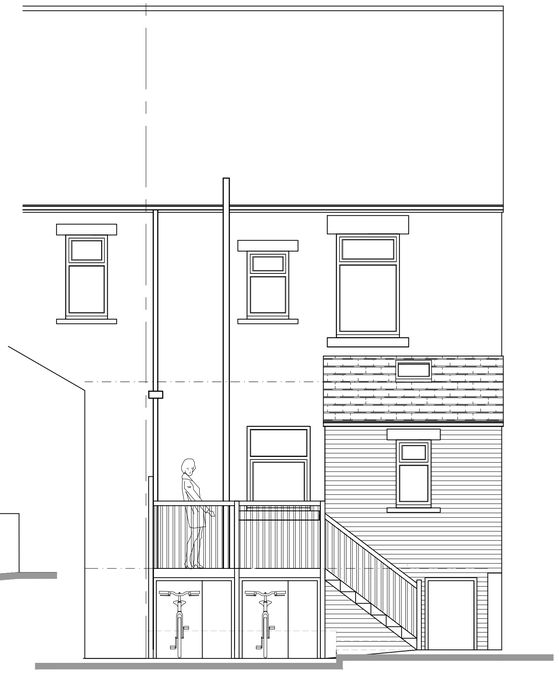


PROPOSED REAR ELEVATION

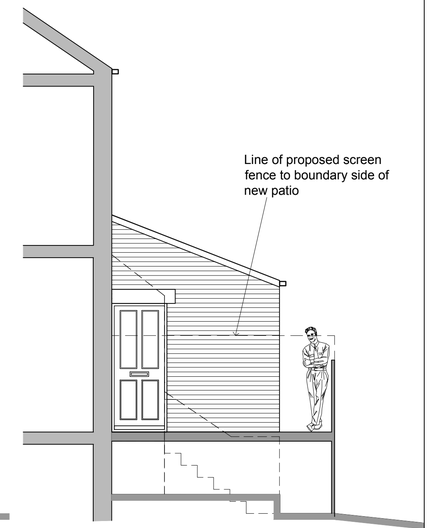


PROPOSED NW SIDE ELEVATION

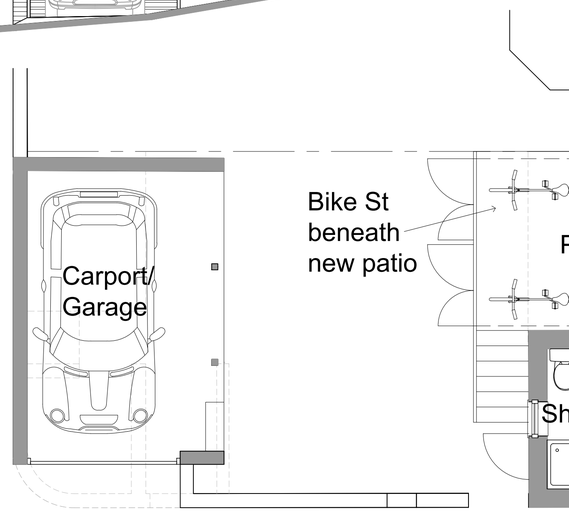


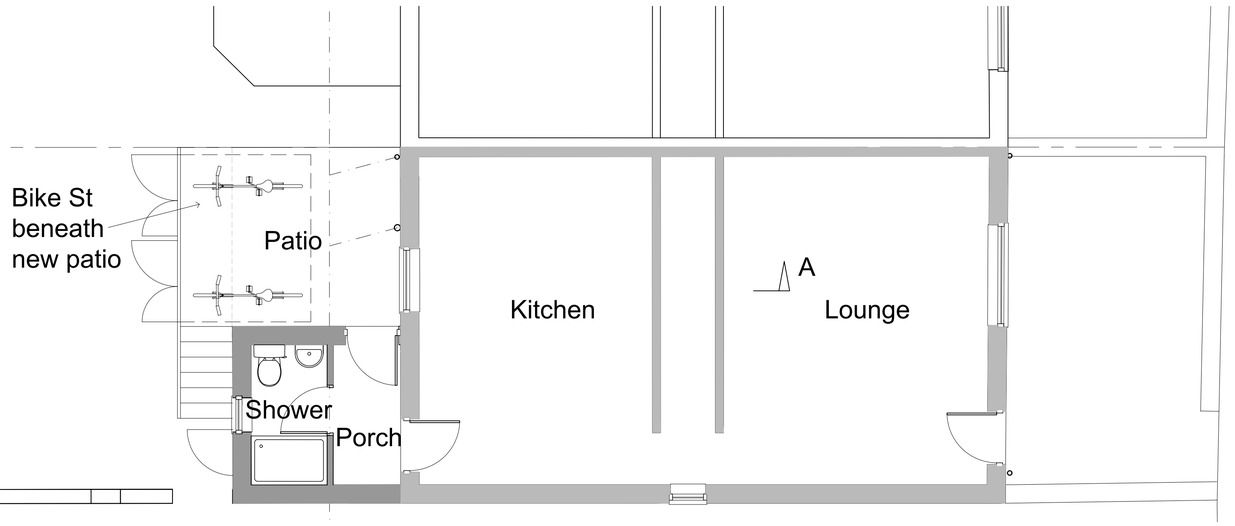


PROPOSED GROUND FLOOR & SITE PLAN

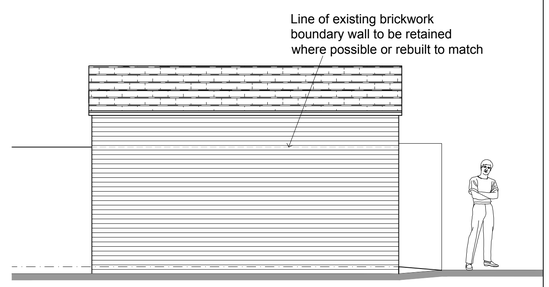


PROPOSED CARPORT SW REAR ELEVATION

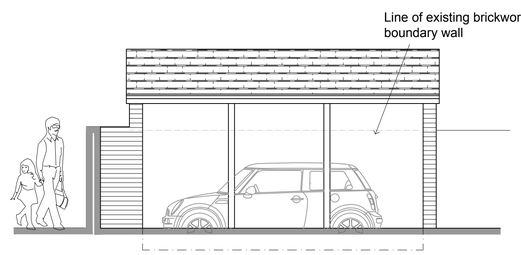

PROPOSED CARPORT NE FRONT ELEVATION

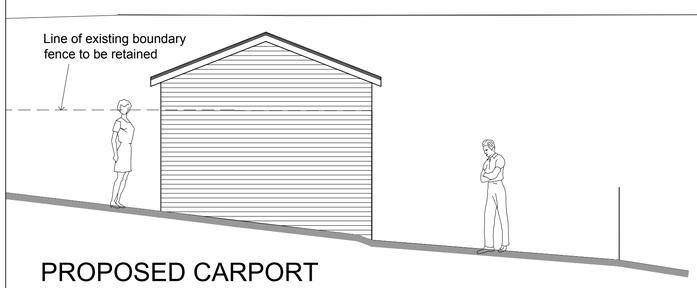

PROPOSED CARPORT NW SIDE ELEVATION

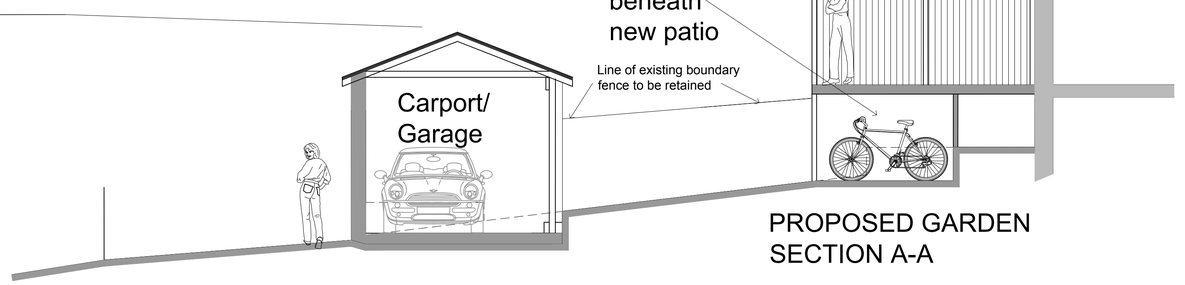

PROPOSED GARDEN SECTION A-A

0 1 2 3 4 5 6 7 8 9 10111213ft
0 1 2 3 4m

CLIENT :-
Mr K. Fox
JOB TITLE:-
Proposed New Carport and Raised Rear Garden Patio
SITE:-
28 The Walk
Birdwell
Barnsley
S70 5UA

Scales 1:10, 1:20, 1:50, 1:75 1:100, 1:200, 1:500, 1:1250.
Date: Nov 2018
SHEET No : KF- PL2
REVISION.A