PROPOSED FRONT ELEVATION

SCALE - 1:100
(no alterations)

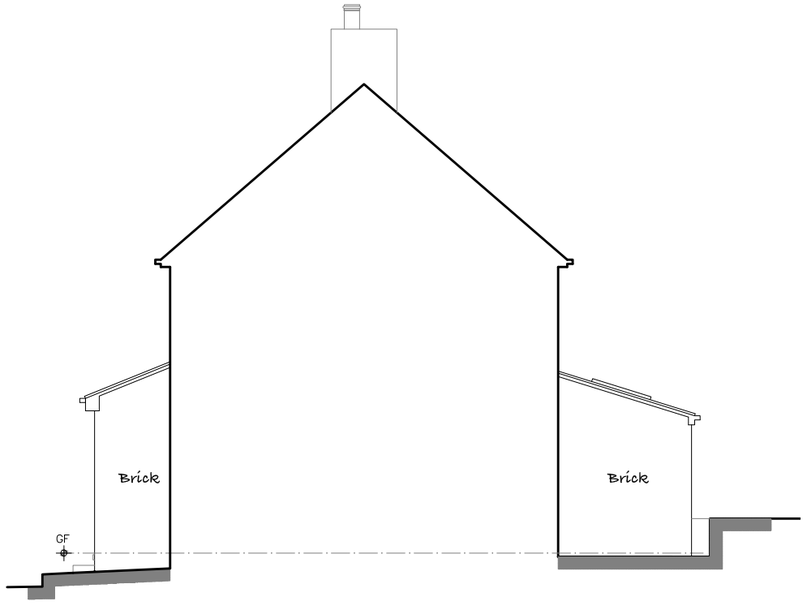

PROPOSED SIDE ELEVATION

SCALE - 1:100

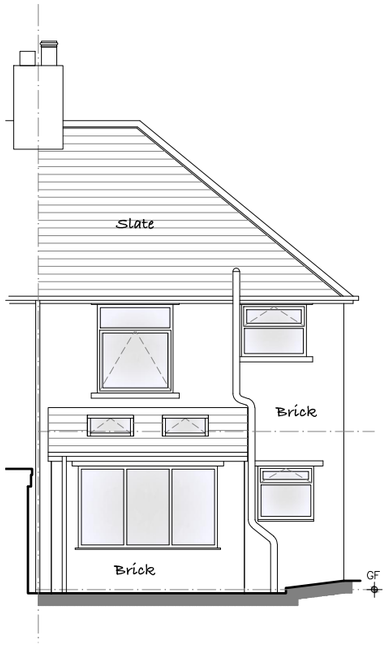

PROPOSED REAR ELEVATION

SCALE - 1:100

PROPOSED SIDE ELEVATION

SCALE - 1:100

Materials As Proposed -

Walls - Brickwork finish to outerleaf.

Doors - Upvc framed doorset(s).

Windows - White upvc framed double glazed units.

Roof - Slate finish to lean-to roof.

Fascia/Guttering - Fascia board with black guttering & downpipes to suit.

CDM 2015

RISKS

1. RESTRICTED ACCESS TO SITE.
2. SITE WELFARE REQUIREMENTS.
3. SITE CLEARANCE.
4. DEEP EXCAVATIONS/CONCRETE WORKS.
5. TEMPORARY SUPPORT.
6. WORKING AT HEIGHT.
7. INSTALLATION OF TEMPORARY AND RE-ROUTED SERVICES.
8. HANDLING LOADS.

Do not scale from this drawing. tractus:dma must be notified immediately should any discrepancies be found. The contractor must check all dimensions on site before construction or manufacture of materials. This drawing or any portion of it may not be reproduced without the consent of tractus:dma .

NOTES

All efforts have been made in measuring existing site.
However the contractor / builder is responsible, for checking & confirming all given dimensions on site prior to pricing & works.

Extent of boundary ownership confirmed by applicant.

Proposal -

Householder Application for Planning Permission for the demolition of existing conservatory and construction of new rear extension with lean-to roof finish to meet end-user requirements.

Current Use -

C3 - Dwellinghouse.

1) GENERAL BUILDING NOTES

a) All works to be in accordance with Building Regulations, current editions and amendments and to the satisfaction of the Building Control Authority.
b) All works within the contract and by the contractor must be carried out in such a way that all requirements under the Health and Safety at Work Act are satisfied and maintained.
c) All works by the Contractor must be carried out in compliance with the requirements of all British Standards, Codes of Practice etc. and with the requirements of all relevant and current Statutory Authority regulations.
d) All structural calculations if required to be submitted by client appointed Structural Engineers and upgraded as necessary as works proceed to suit any clients requirements.
e) The contractor must ensure and will be held responsible for the stability of the building structure at all stages of the contract.

2) APPROVED DOCUMENT A STRUCTURE

a) All structural details and calculations if required to be submitted for approval to Building Control Authority by client appointed Structural Engineer.

PLANNING

Rev	Description	Date	By	App'd
A	Proposed elevations revised.	01/04/21	AM	-

tractus:dma
architectural design

Headfield Business Centre, Headfield Mills
Savile Road, Dewsbury, West Yorkshire, WF12 9LQ
t: 01924 462 550 m: 07531 812 823
e: dean@designmanageachieve.com

Client
Mr. Paul Dodd

Project
24, Highstone Lane,
Ward Green, S70 6SW

Drawing title
Proposed Elevations

Drawn by		Date
AM		03/21

Drawing no	Project no	Scale @ A3	Rev
PL-02	21-744	1:100	A

©2021 tractus:dma architectural design