NOTE
ALL DIMENSIONS MUST BE CHECKED ON SITE AND NOT SCALED FROM THIS DRAWING

COPYRIGHT
THIS DRAWING IS THE PROPERTY OF THE COMPANY AND MAY NOT BE COPIED, USED OR DISCLOSED FOR ANY PURPOSE EXCEPT AS AUTHORISED IN WRITING BY THE COMPANY




FRONT TYPICAL SIDE REAR


ELEVATIONS OF REPLACEMENT GARAGE FOR Nº 16 1:200




FRONT SIDE REAR

ELEVATIONS OF GARAGE FOR PROPOSED BUNGALOW 1:200

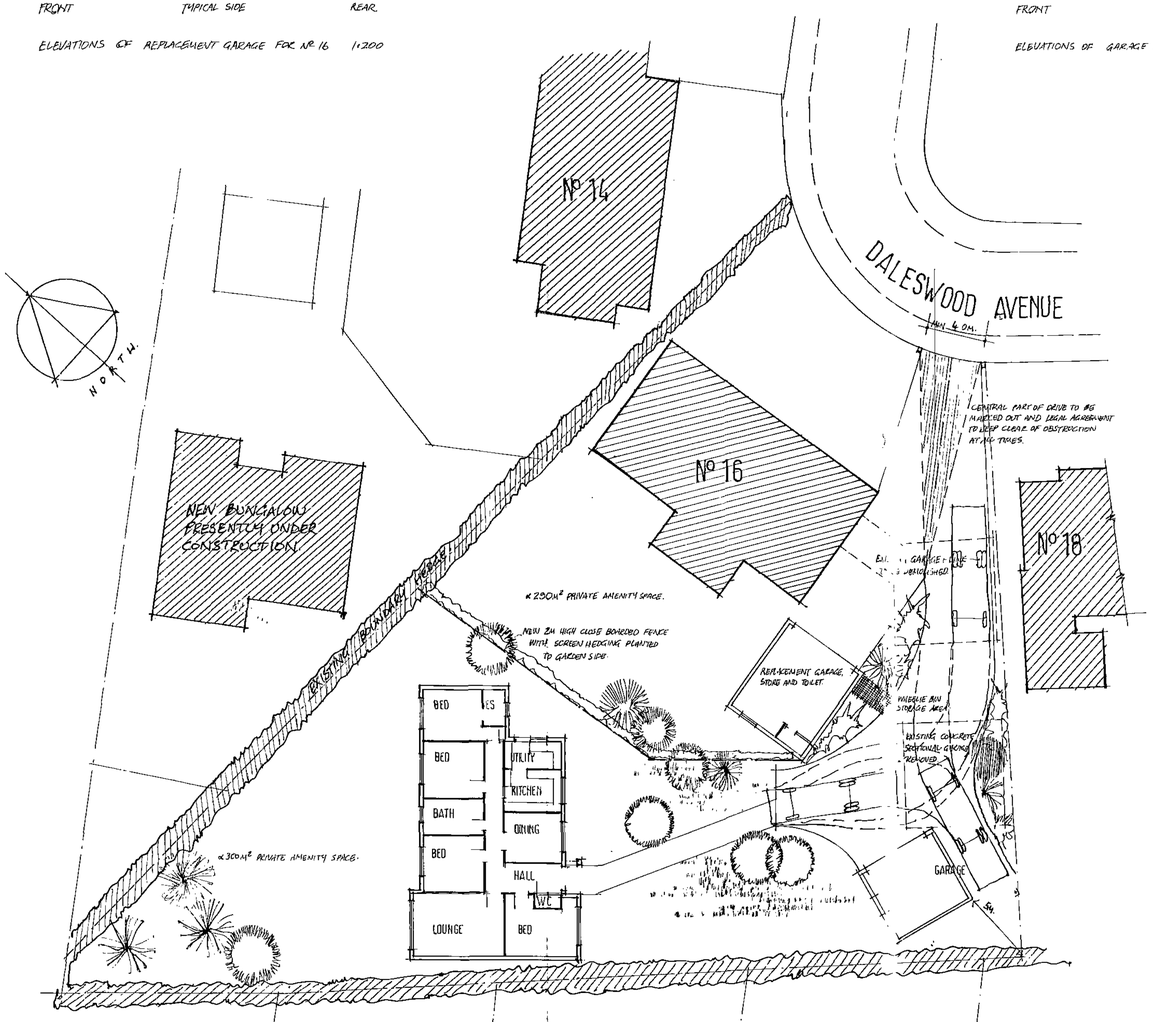




REAR ELEVATION



END ELEVATION



FRONT ELEVATION



END ELEVATION

WIRECUT MULTI FACING BRICKS TO MATCH EXISTING
ROSEMARY ROOF TILES.
WHITE PVCu WINDOWS, GUTTERS + FALLPIPES.
TILES AND BRICK SAMPLES TO BE PROVIDED TO L.P.A FOR APPROVAL PRIOR TO COMMENCEMENT ON SITE.
NEW DRAINS TO FALL MIN 1 IN 60 TO CONNECT INTO EXISTING COMBINED SYSTEM.



REV	DATE	AMENDMENT
A	12/10/01	GARAGE RE-SITED AWAY FROM TREE IN CORNER + TURNING FACILITY ADDED

CLIENT
MR + MRS. A. BROWN

TITLE
PROPOSED BUNGALOW + GARAGES IN REAR GARDEN :-
Nº 16 DALESWOOD AVENUE
POGMOOR
BARNSLEY

P. Dimelow
B.A. hons Dip Arch. M.A.
Architectural Design and Planning Consultant

Ash Barn
Tinkle Street
Wortley
Sheffield
S35 7DH 0114 2884937

SCALE	DATE	DRAWN
1:200	AUGUST 2001	R.D.

DRAWING No.	REV
TBP – B01 – 1.	A