


LEGEND

- Existing Trees — Refer to drawing Appendix 4: Tree Protection Plan Ref: 1310 for trees to be retained / removed produced by AWA Tree Consultants
- Proposed Trees
- Proposed Hedges
- Proposed Shrub Beds
- W1 Mix
- Wildflower Grass; EM5F Mix by Emorsgate Seeds. Sowing Rate: 1.5g/m²
- Wildflower Grass; EL1F Mix by Emorsgate Seeds. Sowing Rate: 1.5g/m²
- Amenity Grass; A22 Mix by Germinal Seeds. Sowing Rate: 50.00g/m²
- Existing Watercourse. Refer to Ecological Estates report EE-P-007-01 for recommendations to this area
- Proposed Bulb Planting
- gtRootbarrier325, 2m wide, total length 220Lm(offset distance from proposed services located on drawing)
- Proposed Footpath

LOCATION PLAN

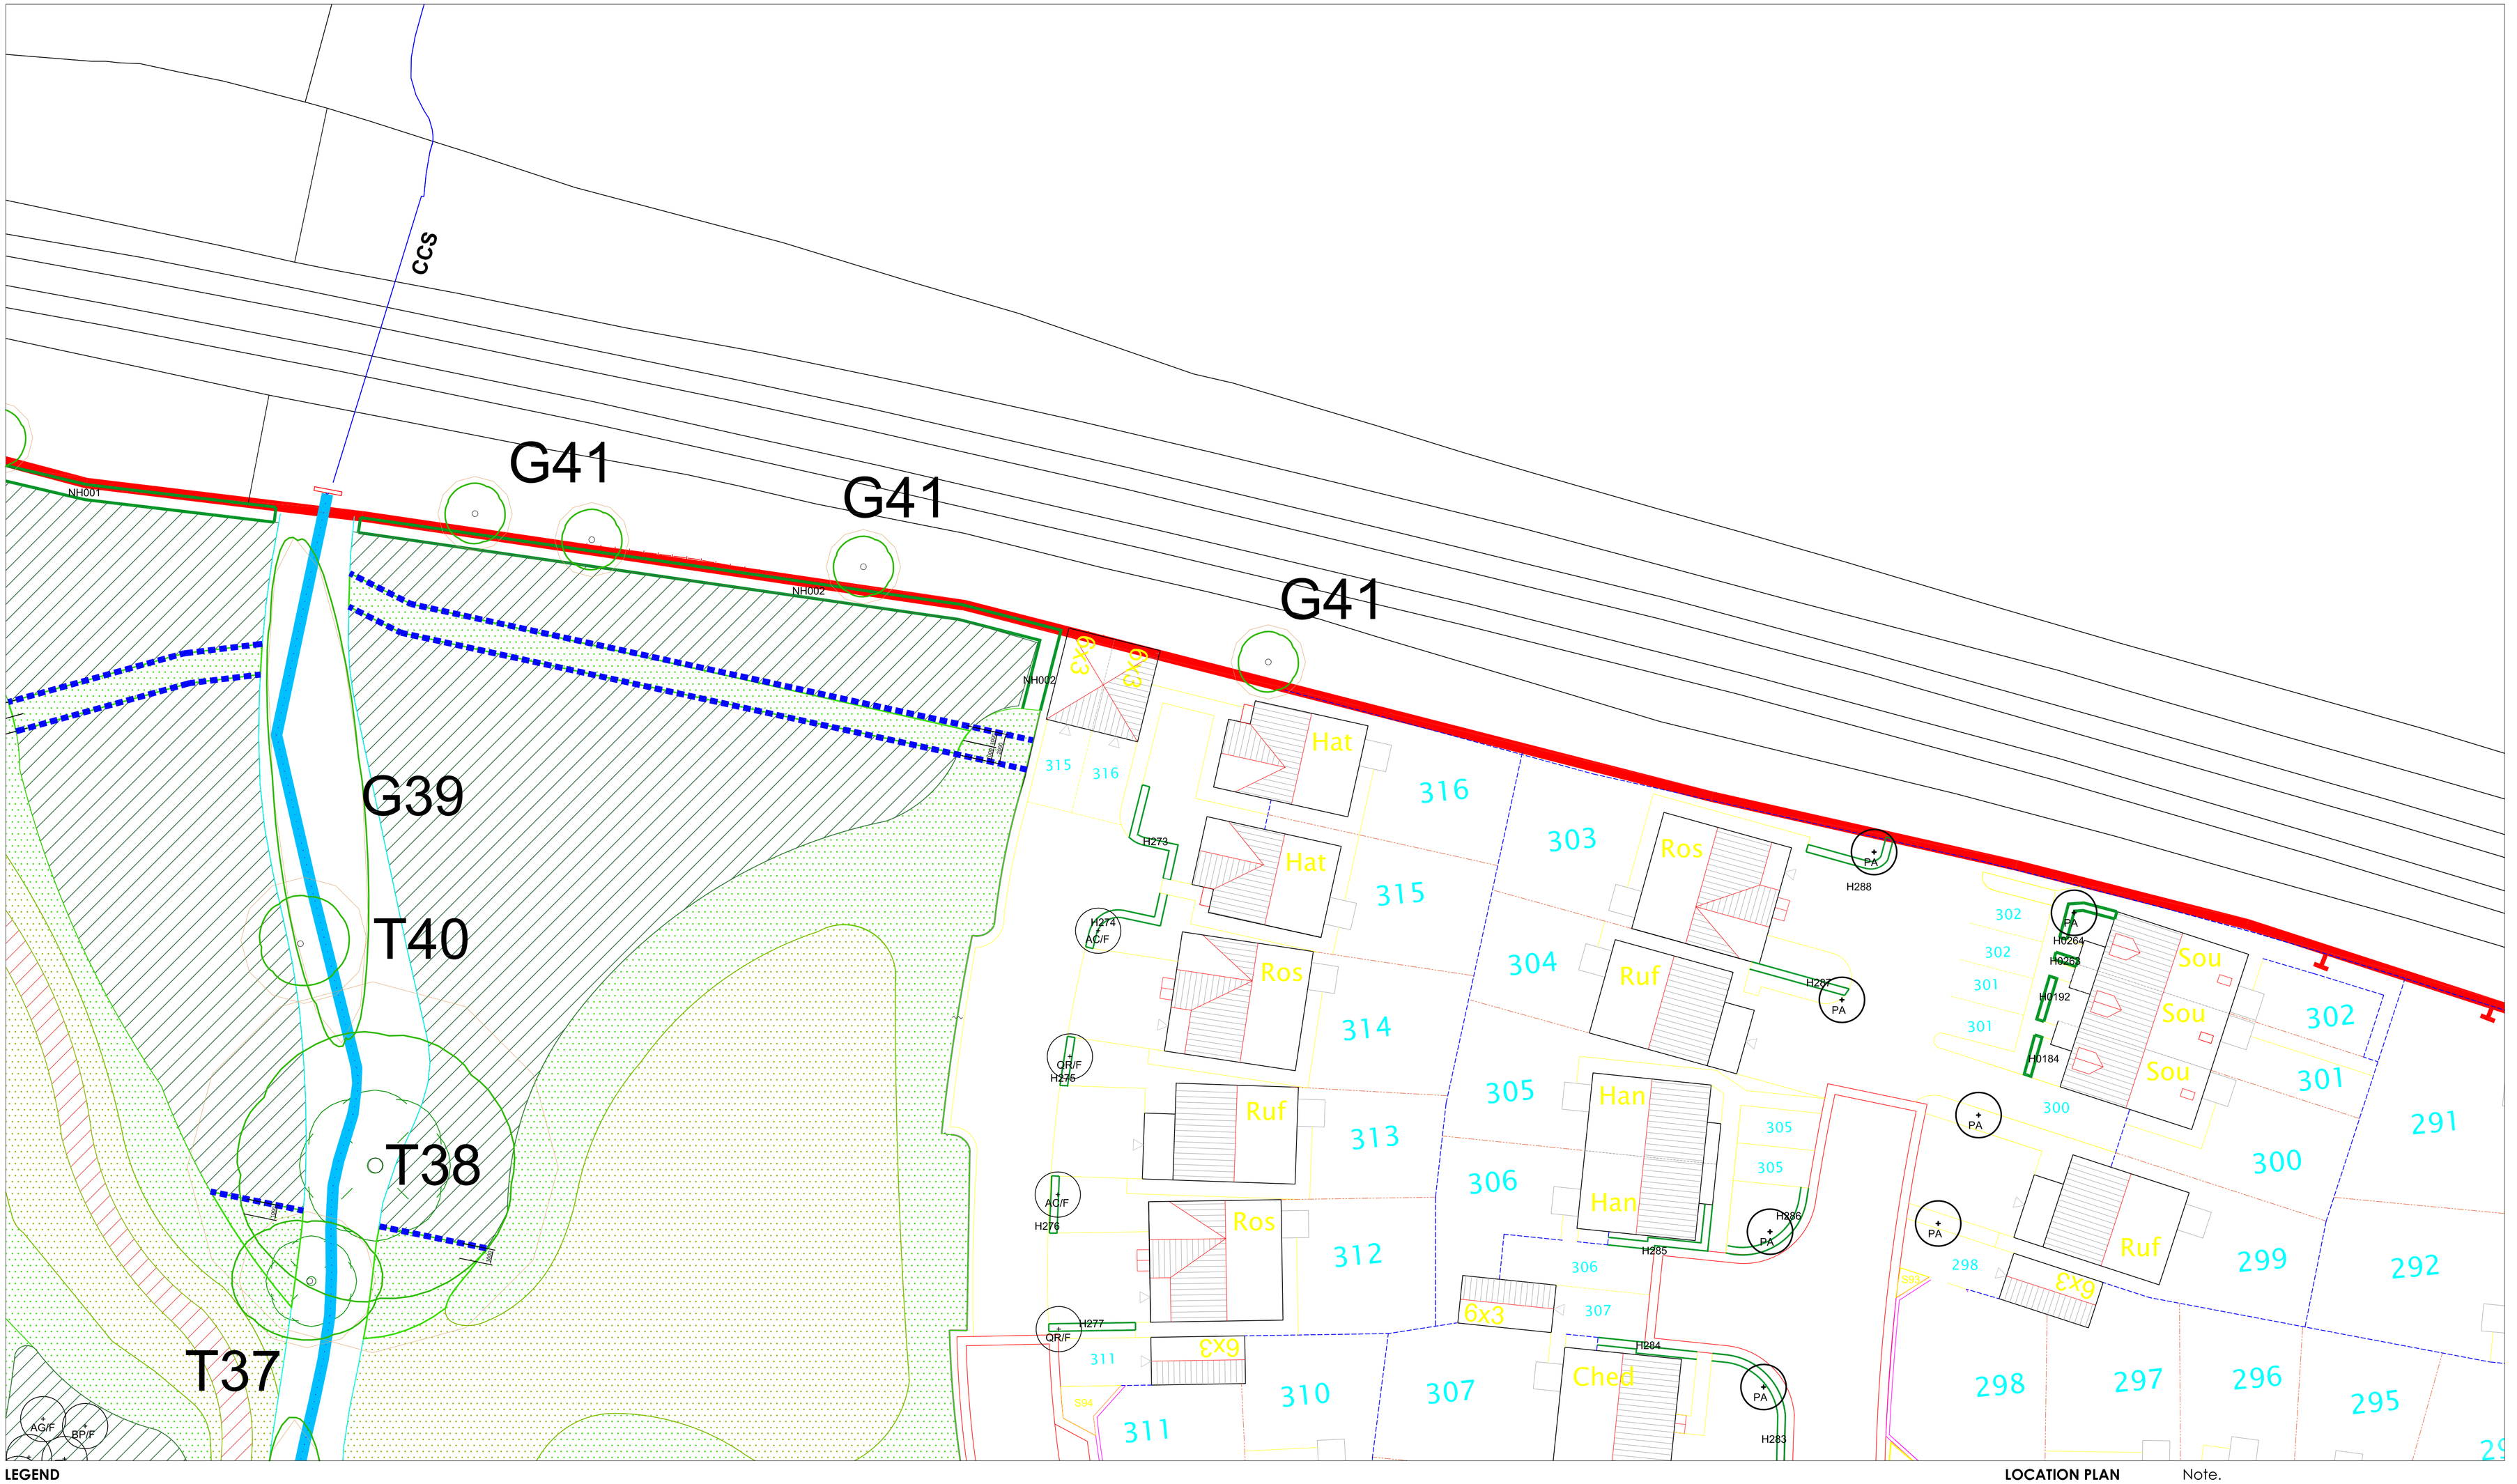

Note.
To be read in conjunction with drawings 5685-93-014,015, 016, 017

Rev.		
H	Drawn:FW Checked:CJT Date:20-02-2017	Plan updated with new housing layout
G	Drawn:ERF Checked:CJT Date:08-12-2016	Plan updated with new housing layout
F	Drawn:ERF Checked:CJT Date: 28-11-2016	Plan updated with new housing layout
E	Drawn:FW Checked:CJT Date:26-02-2016	W1 Mix amended, root barrier added
C	Drawn:FW Checked:CJT Date:08-01-2016	Amended in line with the new layout
B	Drawn:CJT Checked:TR Date:12-08-2015	Layout updated following comments
A	Drawn:CJT Checked:TR Date:24-02-2015	Layout updated following comments

Robinson Landscape Design
The Studio, Hedgeley, North Bank
Haydon Bridge, Hexham, NE47 6LY
Tel: 01434 684 100
info@robinsonlandscapedesign.co.uk

Wilthorpe, Barnsley
Drawing Name
Planting Plan 3 of 13

Drawing No:	Scale at A1:
5685-93-003	1:200
Drawn: CJT	Checked: TR
	Date: 13-02-2015